## UNCLASSIFIED

# AD NUMBER AD815210 **NEW LIMITATION CHANGE** TO Approved for public release, distribution unlimited **FROM** Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; Feb 1967. Other requests shall be referred to Air Force Flight Dynamics Lab., Attn: FDFR, Wright-Patterson AFB, OH 45433..

# **AUTHORITY**

Air Force Flight Dynamics Lab ltr dtd 1 Feb 1973

# INVESTIGATION OF CREW ESCAPE CONCEPTS FOR VIOL AND LOW-ALTITUDE DASH VEHICLES

John O. Bull Edward L. Serocki Jakob Schor, et al.

THE BOEING COMPANY, RENTON, WASHINGTON, P.U. BOX 707,

TECHNICAL REPORT AFFDL-TR-66-149
FEBRUARY 1967



This document is subject to special export controls and each transmittal to foreign governments or fareign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFR), Wright-Patterson Air Force Base, Ohio 45433.

AIR FORCE FLIGHT DYNAMICS LABORATORY RESEARCH AND TECHNOLOGY DIVISION AIR FORCE SYSTEMS COMMAND WRIGHT-PATTERSON AIR FORCE BASE, OHIO

REPRODUCED FROM BEST AVAILABLE COPY

# INVESTIGATION OF CREW ESCAPE CONCEPTS FOR VTOL AND LOW-ALTITUDE DASH VEHICLES


John O. Bull

Edward L. Serocki

Jakob Schor, et al.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFR), Wright-Patterson Air Force Base, Ohio 45433.

# DISCLAIMER NOTICE

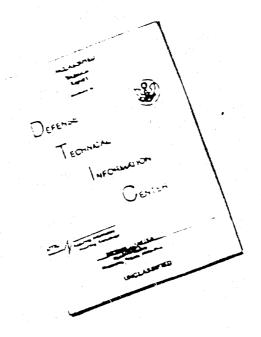

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

#### FOREWORD

The research work in this report was performed by The Boeing Company, Renton, Washington, for the Air Force Flight Dynamics Laboratory, Research and Technology Division, Air Force Systems Command, Wright-Patterson Air Force Base, under AF Contract No. AF33(615)-2378. This research work is part of an effort to determine the crew escape design requirements for VTOL and low-altitude dash vehicles; investigate various crew escape concepts such as ejection seats, encapsulated seats, nose and pod type escape capsules; study the associated escape problems such as stability, critical timing, automatic initiation, high-dynamic forces, low-altitude and VTOL escape performance, etc.; and determine the theoretical feasibility of the techniques and concepts that will meet the rehicle requirements. The Project number is 1362, "Crew Escape for Flight Venicles" and the Task number is 136203, "Crew Escape Techniques Research." The Air Force program monitor was Mr. Marvin C. Whitney, office symbol FDFR, Recovery and Crew Station Branch. The research was conducted from February 1965 to August 1966.

Mr. John O. Bull of The Boeing Company, Product Development Technology Section was the project leader responsible for the study organization and technical direction of the work performed. Other Boeing personnel contributing to the study and participating in the preparation of the report were Jakob Schor, Larry J. Nolan, Edward L. Serocki, Bernie C. Mackey, George A. Dowling, George W. Milner, Claud Hendry, Liale R. Towner, and Michael D. Terry.

Information in this report is embargoed under the Department of State International Traffic In Arms Regulations. The report may be released to foreign governments by departments or agencies of the U.S. Government subject to approval of the Air Force Flight Dynamics Laboratory, or higher authority within the Department of the Air Force. Private individuals or firms require a Department of State export license.

The manuscript was released by the authors in August 1966 for publication as a technical report.

This technical report has been reviewed and is approved.

GEORGE A. SOLT, JR.

Chief, Recovery & Crew Station Branch

Vehicle Equipment Division

AF Flight Dynamics Laboratory

#### ABSTRACT

This report covers the results of a study to define crew escape requirements and criteria for selection, evaluation, and design of crew escape systems for VTOL and low-altitude dash vehicles. Escape concept performance, survival, pressurization, restraini, crew comfort and efficiency, and development and qualification testing requirements are defined. Representative open ejection seat, encapsulated ejection seat, cockpit pod, and separable nose capsule escape concepts and vehicle configurations are defined. Escape concept performance capabilities with respect to altitude, speed, and descent angle are presented and results of analyses of escape concept effectiveness for VTOL hover and transition, conventional takeoff and landing, low-altitude dash, and high-speed and high-altitude flight regimes are presented. Also, the results of an investigation of automatic emergency detection and escape initiation are presented. Escape concept trade data relative to escape and survival potential, reliability, cost, weight, volumetric penalty, availability. crew comfort and efficiency, and crew safety were developed and are presented in a form useful as a guide in the selection, evaluation and design of escape concepts for advanced VTOL and low-altitude dash vehicles.

# PAGES NOT FIDED ARE BLANK

#### CONTENTS

Sec	tion	The state of the s	e
I.	INT	RODUCTION	٠.
II.	PR	LIMINARY INVESTIGATION	ı
	. •	Escape System Goals and Requirements	
	1.		
		with the company of t	
,		b. Survival Equipment	
		c. Emergency Pressurization and Breathing Atmosphere 12	
		d. Restraint	
		e. Crew Comfort and Efficiency	
		f. Crew Compartment Integration	i
	2.	Automatic Detection and Escape Initiation	,
III.		APE CONCEPT/VEHICLE CONFIGURATIONS AND	
	CA	ABILITIES	1
	1	Ones Figetien Cont Confirmations	
	1.	Open Ejection Seat Configurations	
		a. Configurations	
		b. Performance	
		c. Weight Penalty	
	2.	Fncapsulated Ejection Seat Configurations	
	~ .	a. Configurations	
		b. Performance	
		3. Weight Penalty	
		o. Worghe Londing	i
	3.	Cockpit Pod Capsule Configurations 61	
		a. Configuration 61	
		b. Performance 61	
	4.	Separable Nose Capsule Configurations	
		a. Configuration	:
		b. Performance	
	5.	Capsule Subsystems	•
	u,		
•		c. Stabilization Booms	
		d. Parachutes	
		e. Impact Attenuation System	
		f. Flotation System	
		g. Nose Thruster (Four-Man Cockpit Fed Capsule) 108	
	6.	Capsule Aerodynamic Characteristics 109	

# CONTENTS (Cont)

Sec	tion		Page
IV.	TE	ST REQUIREMENTS	. 114
	1.	Development and Qualification Tests	. 114
	2.	Wind Tunnel Programs  a. Two-Man Subsonic VTOL Vehicle Open Ejection	. 114
		Seats and Encapsulated Ejection Seats	. 114
		and Separable Nose Capsules	. 126
		Ejection Seats and Encapsulated Ejection Seats d. Three-Man Combined Capability Vehicle Cockpit	. 128
		Pod and Separable Nose Capsules	. 130
		Seats, Encapsulated Ejection Seats, Cockpit Pod Capsules, and Separable Nose Capsules	. 132
	3.	Development and Qualification Cost Summary	. 132
V.	ESC	CAPE CONCEPT PERFORMANCE EVALUATION	135
	<b>1.</b>	VTOL Hover and Transition  a. Escape Conditions	. 138 . 147
	2.	Conventional Takeoff and Landing	202 202
	3.	Low-Altitude Eash	217 217
	4.	High Altitude and High Speed	284
VI.	ESC	CAPE CONCEPT TRADE DATA	287
	1.	Escape and Survival Potential	289

#### CONTENTS (Cont)

Secti	lon	- 보통 이 사용에 가장 하는 것은 사람들이 되었다. 그 사용 사용을 받는 것이 되었다. 그런 것이 되었다. - 보통 - 보통	Page
	2.	Cost	294
	3.	Weight Penalty	295
	4.	Volume Penalty	295
	5.	Availability	297
	6.	Crew Comfort and Efficiency	298
	7.	Crew Safety (Other, Than Escape)	302
		CAPE CONCEPT TRADE DATA SUMMARY AND ALUATION	<b>30</b> 0
	RE	FERENCES	311

#### ILLUSTRATIONS

Figure		Page
1	Flight Envelopes	4
2	Normal Vertical Takeoff	õ
3	Normal Vertical Landing	
4	Vertical Takeoff Emergency Conditions	8
5	Vertical Landing Emergency Conditions	
6	Altitude, Dive Angle, and Airspeed Escape Criteria	
7	Airplane Trajectories for Pushover at Sea Level	
8	Airplane Trajectories for Hard Pushover Maneuver	14
9	Automotic Escape Initiation System	16
10	Automatic Escape Initiation Altitude Vs	
	Dive Angle for Vehicle Speed Mach 1.2	18
11	Automatic Escape Initiation Altitude Vs	
	Dive Angle for Vehicle Speed 300 KEAS	
12	Block Diagram — Open Ejection Seat Event Sequence	23
13	Two-Man Subsonic VTOL Vehicle Open Ejection	
	Seat Configuration	24
14	Three-Man Combined Capability Vehicle Open Ejection	
	Seat Configuration	- 25
15	Four-Man Supersonic Dash Vehicle Open Ejection	
	Seat Configuration	26
16	Two-Man Vehicle Open Ejection Seat Level Flight	
	Trajectories	27
17	Three-Man Vehicle Open Ejection Seat Level	
	Flight Trajectories	28
18 🐇	Four-Man Vehicle Open Ejection Seat Level	
	Flight Trajectories	29
19	Two-Man Vehicle Open Ejection Seat Dive Trajectories,	
	200 Knots	30
20	Two-Man Vehicle Open Ejection Seat Dive Trajectories,	
	600 Knots	31
21	Three-Man Vehicle Open Ejection Seat Dive Trajectories,	
	200 Knots	<b>3</b> 2
22	Three-Man Vehicle Open Ejection Seat Dive Trajectories,	
	600 Knots	33
23	Four-Man Vehicle Open Ejection Seat Dive Trajectories,	
	200 Knots	34
24	Four-Man Vehicle Open Ejection Seat Dive Trajectories,	
22.5	600 Knots	35
25	Two-Man Vehicle Open Ejection Seat Escape Altitude Required.	36
23	Three-Man Vehicle Open Ejection Seat Escape Altitude	
	Required	37
2 3	Four-Man Vehicle Open Ejection Seat Escape Altitude	
	Required	38

Figure		Pag
28	Open Ejection Seat — Computer Plot of Acceleration	. 39
29	Open Ejection Seat — Acceleration Versus Time	. 39
30	Open Ejection Seat — Peak g	. 40
31	Block Diagram — Encapsulated Fjection Seat Event Sequence.	. 45
32	Two-Man Subsonic VTOL Venicle Encapsulated Ejection	
	Seat Configuration	. 46
33	Two-Man Subsonic VTOL Vehicle Encapsulated Ejection	
	Seat Configuration (Seat Positioning Type)	. 47
34	Three-Man Combined Capability Vehicle Encapsulated	
	Ejection Seat Configuration	. 48
35	Four-Man Supersonic Dash Vehicle Encapsulated	
	Ejection Seat Configuration	. 49
36	Two-Man Vehicle Encapsulated Ejection Scat Level	
	Flight Trajectories	. 50
37	Three-Man Vehicle Encapsulated Ejection Seat Level	
	Flight Trajectories	. 51
38	Four-Man Vehicle Encapsulated Ejection Seat Level	•
	Flight Trajectories	52
39	Two-Man Vehicle Encapsulated Ejection Seat Dive	•
00	Trajectories, 200 Knots	. 33
40	Two-Man Vehicle Encapsulated Ejection Seat Dive	. 50
***	Trajectories, 600 Knots	53
41	Three-Man Vehicle Encapsulated Ejection Seat Dive	• 00
41	Trajectories, 200 Knots	- 4
42		. 54
• • • • • • • • • • • • • • • • • • • •	Three-Man Vehicle Encapsulated Ejection Seat Dive Trajectories, 800 Knots	
43		. 54
40	Four-Man Vehicle Encapsulated Ejection Seat Dive Trajectories, 200 Knots	
44	Four-Man Vehicle Encapsulated Ejection Seat Dive	. 55
77		
45	Trajectories, 800 Knots	. 55
40	Two-Man Vehicle Encapsulated Ejection Seat Escape Altitude Required	
46	Three-Man Vehicle Encapsulated Ejection Seat Escape	56
40	Altitude Required	,
47	Four-Man Vahiala Engangulated Cincilan Cost Process	5.7
#1	Four-Man Vehicle Encapsulated Ejection Seat Escape	=0
40	Altitude Required	58
48	Encapsulated Seat — Computer Plot of Acceleration	59
49	Encapsulated Ejection Seat — Acceleration	<b>5</b> 9
50	Encapsulated Ejection Seat — Peak g	60
, 51	Two-Man Subsonic VTOL Vehicle Cockpit Pod Capsule	
-0	Configuration	5 i
52 .	Three-Man Combined Capability Vehicle Cockpit	
	Pod Capsule Configuration	65
53	Four-Man Supersonic Dash Vehicle Cockpit Pod Capsule	
	Configuration	66

Figure		Page
54	Block Diagram — Escape Events Two-Man Cockpit	
	Pod Capsule	67
55	Block Diagram Escape Events Three-Man	
	Cockpit Pod Capsule	68
56	Block Diagram — Escape Events Four-Man	
	Cockpit Pod Capsule	69
57	Two-Man Cockpit Pod Capsule Level Flight Trajectories	70
58	Three-Man Cockpit Pod Capsule Level Flight Trajectories	71
59	Four-Man Cockpit Pod Capsule Level Flight Trajectories	72
60	Two-Man Cockpit Pod Capsule Dive Trajectories, 200 Knots	73
61	Two-Man Pod Capsule Dive Trajectories, M 0.9	
62	Three-Man Cockpit Pod Capsule Dive Trajectories, 200 Knots.	
63	Three-Man Cockpit Pod Capsule Dive Trajectories, 800 Knots.	
64	Four-Man Cockpit Pod Capsule Dive Trajectories, 200 Knots .	75
65	Four-Man Cockpit Pod Capsule Dive Trajectories, 800 Knots .	75
66	Two-Man Cockpit Pod Capsule Escape Altitude Required	76
67	Three-Man Cockpit Pod Capsule Escape Altitude Required	77
68	Four-Man Cockpit Pod Capsule Escape Altitude Required	78
69	Peak g Two-Man Cockpit Pod Capsule	79
70	Peak g Three-Man Cockpit Pod Capsule	80
71	Peak g Four-Man Cockpit Pod Capsule	80
72	Two-Men Cockpit Pod Capsule Computer Plot of	
	Maximum Acceleration	81
73	Three-Man Cockpit Pod Capsule Computer Plot of	
	Maximum Acceleration	81
74	Four-Man Cockpit Pod Capsule Computer Plot of	
	Maximum Acceleration	82
75	Two-Man Cockpit Pod Capsule — Acceleration Versus Time	82
7ช	Three-Man Cockpit Pod Capsule - Acceleration Versus Time .	83
77	Four-Man Cockpit Pod Capsule — Acceleration Versus Time	83
78	Two-Man Subsonic VTOL Vehicle Separable Nose	*
	Capsule Configuration	85
79	Three-Man Combined Capability Vehicle Separable	
	Nose Capsule Configuration	86
80	Four-Man Supersonic Dash Vehicle Separable	
	Nose Capsule Configuration	84
81	Block Diagram — Escape Events Two-Man Separable	
	Nose Capsule	88
82	Block Diagram — Escape Events Three-Man Separable	
	Nose Capsule	89
83 -	Block Diagram — Escape Events Four-Man Separable	
	Nose Capsule	90
84	Two-Man Separable Nose Capsule Level Flight Trajectories	93

Figure		Page
85	Three-Man Separable Nose Capsule Level Flight Trajectories .	94
86	Four-Man Separable Nose Capsule Level Flight Trajectories	95
87	Two-Man Separable Nose Capsule Dive Trajectories,	96
88	200 Knots	96
89		30
89	Three-Man Separable Nose Capsule Dive Trajectories, 200 Knots	97
90	Three-Man Separable Nose Capsule Dive Trajectories,	
	800 Knots	97
91	Four-Man Separable Nose Capsule Dive Trajectories, 200 Knots	98
92	Four-Man Separable Nose Capsule Dive Trajectories,	
	800 Knots	98
93	Two-Man Separable Nose Capsule — Minimum Escape	100
	Altitudes	99
94	Three-Man Separable Nose Capsule — Minimum Escape	
	Altitudes	100
95	Four-Man Separable Nose Capsule — Minimum Escape	
	Altitudes	101
96	Peak g, Two-Man Separable Nose Capsule	102
97	Peak g, Three-Man Separable Nose Capsule	
98	Peak g. Four-Man Separable Nose Capsule	103
99	Two-Man Separable Nose Capsule Computer Plot of	
	Maximum Acceleration	103
100	Three-Man Separable Nose Capsule Computer Plot of Maximum Acceleration	104
101	Four-Man Separable Nose Cap ale Computer Plot of	104
101	Maximum Acceleration	104
102	Two-Man Separable Nose Capsule — Acceleration	10-5
		105
103	Three-Man Separable Nose Capsule — Acceleration	200
		105
104	Four-Man Separable Nose Capsule — Acceleration	
		106
105	Cockpit Pod Capsule Drag and Lift Coefficients	110
106	Cockpit Pod Capsule Pitch and Yaw Coefficients	111
107	Separable Nose Capsule Drag and Lift Coefficients	112
108	and the same and the same of t	113
109	Open Ejection Seat Test Requirements	115
110	Encapsulated Ejection Seat Test Requirements	115
111	Cockpit Pod and Separable Nose Capsule Test Requirements	116
112	Escape Conditions for Engine Failure During VTOL Hover	
113	TIME AND	141 141

	그 ㅎ 이렇다 열심일은 중의 시작하다 되는 하는 그를 하고 있다. 이 경기로 무슨 하는 것이 <b>Page</b> (
Figure	
	Aerodynamic Control Available During VTOL Transition
114	Aerodynamic Lift Available During VTOL Transition 144
115	VTOL Vehicle Transition Schedule
116	VTOL Engine Failure Escape Condition Check Points 146
117	VTOL Engine Fatture Escape Condition Angle
118	VTOL Vehicle Thrust, Thrust Deflection Angle,
	Pitching Moments and Rolling Moments Following
	Contra Profine Hallite at co rivoco radi
119	VTOL Vehicle Thrust, Thrust Deflection Angle,
	Ditching and Rolling Moments Following
	Tiff Engine Failure at 85 Ft/Sec EAS
120	Facene Conditions for Engine Failure During VIUL
	Howan Plight
121	Facene Conditions for VTOL Cruige Engine Failure
*~*	During Transition at 85 Ft/Sec EAS
122	Facene Conditions for VTOL Lift Engine Failure
1.42	During Transition at 85 Ft/Sec EAS
100	The come Completions for VTOI. Craige Engine Fallure
123	During Transition at 120 Ft/Sec EAS
	Escape Conditions for VIOL Lift Engine Failure
124	During Transition at 120 Ft/Sec EAS
	Escape Conditions for VTOL Cruiso Engine Failure
125	Escape Conditions for viola Cruiso Engine Parkers
	During Transition at 170 Ft/Sec EAS
126	Escape Conditions for VTOL Lift Engine Failure
	During Translation at 1.0 Ft/Sec Eas
127	Illustration — Method of Determining Escape
	Fitectiveness index
128	Two-Man Vehicle Open Ejection Seats Minimum Escape
	Altitude VTOL Hover Flight Engine Failure —
	Maximum Stability Case
129	Two-Man Encapsulated Election Seats Minimum Escape
120	Aintudes VTOI, Hover Flight Engine Failure
	Maximum Stability Case
130	Two-Man Vehicle Cockpit Pod and Separable Nose Capsule
130	Minimum Recane Altitude VTOL Hover Flight
	Engine Failure — Maximum Stability Case
101	Two-Man Vehicle Open Ejection Seats Minimum Escape
131	Altitude Viol Hover Flight Cruise Engine Failure 161
	Two-Man Vehicle Encapsulated Ejection Seats Minimum
132	TWO-Man venicle Encapsulated Ejection occas imministra
	Escape Altitude VTOL Hover Flight Cruise Engine
•	6011117G
133	Two-Man Vehicle Cockeit Fod Capsule Minimum Escape  162
	Willing A. C.P. Hover 2 Heart Olympo runging a running
134	Two-Man Vehicle Separable Nose Capsule Minimum
	Escape Altitude VTOL Hover Flight Cruise Engine
	Failure

Figure			Page
135	Two-Man Vehicle Open Ejection Seats Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure		160
136	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure		163
137	Two-Man Vehicle Cockpit Pod Capsule Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure		164
138	Two-Man Vehicle Separable Nose Capsule Minimum Escape Altitude VTOL Hover Lift Engine Failure		164
139	Two-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 85 Ft/Sec Transition Cruise Engine Failure.		165
140	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 85 Ft/Sec Transition Cruise Engine Failure		165
141	Two-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitudes 85 Ft/Sec Transition	• •	
142	Cruise Engine Failure		166 166
143	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure		167
144	Two-Man Vehicle Cockpit Pol and Separable Nose Capsule Minimum Escape Altitude 85 Ft/Sec	, •	
145	Transition Lift Engine Failure	•	167
146	Failure Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 120 Ft/Sec Transition Cruise Engine	, · •	168
147	Failure	•	168
148	Cruise Engine Failure		169 169
149	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Lift Engine	4	
150	Failure Two-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitude 120 Ft/Sec Transition Lift	•	170
151	Engine Failure	. •	170
	Failure	•	171

Figur	8일 전 1 전 1 전 1 전 1 전 1 전 1 전 1 전 1 전 1 전	Page
152	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 170 Ft/Sec Transition Cruise	171
158	Engine Failure	
154	Cruise Engine Failure	. 172 172
155	Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 170 Ft/Sec Transition Lift Engine	
156	Failure  Two-Man Vehicle Cockpit Pod and Separable Nose Capsule  Minimum Escape Altitude 170 Ft/Sec Transition Lift	. 173
157	Engine Fatture	. 173
158	During Transition Escape Concept Effectiveness Index Two-Man Subsonic VTOL Vahicle Lift Engine Failure	. 174
159	During Transition Escape Concept Effectiveness Index Three-Man Vehicle Open Section Seats Minimum Escape	. 174
	Altitude VTOL Hover Flight Engine Failure — Maximum Stability Case	. 175
160	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude VTOL Kover Flight Engine Failure Maximum Stability Caso	. 175
161	Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitudes VTOL Hover Flight Engine	
162	Failure — Maximum Stability Case  Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure	<ul><li>176</li><li>176</li></ul>
163	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude VTOL Hover Flight Cruise Engine	
164	Failure Three-Man Cockpit Pod Capsule Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure	<ul><li>177</li><li>177</li></ul>
165	Three-Man Vehicle Separable Nose Capsule Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure	. 178
166 167	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure Three-Man Vehicle Encapsulated Ejection Seats Minimum	178
TO	Escape Attitude VTOL Hover Flight Lift Engine Failure	179
168	Three-Man Cockpit Pod Capsule Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure	. 179

Figure		. Paye
169	Three-Man Separable Nose Capsule Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure	. 180
170	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 85 Ft/Sec Transition Cruise Engine Failure	180
171	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 85 Ft/Sec Transition Cruise Engine Failure	
172	Three-Man Vehicle Cockpit Pod and Separable Nose Capsule / Minimum Escape Altitudes 85 Ft/Sec Transition Cruise	./ 181
173	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure	. 182
174	Three-Man Vehicle Encapsulated Ejection Beats Minimum Escape Altitudes 85 Ft/Sec Transition Lift Engine Failure	. 182
175	Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure	. 183
176	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Cruise Engine Failure.	. 183
177	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Cruise Engine Failure	184
178	Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitude 120 Ft/Sec Transition Cruise Engine Failure	184
179	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 120 Ft/Sec Transition Lift Engine Failure	. 185
180	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 120 Ft/Sec Transition Lift Engine	
181	Failure  Three-Man Vehicle Cockpit Pod and Separable Nose Capsule  Minimum Escape Altitudes 120 Ft/Sec Transition Lift	. 185
182	Engine Failure	. 186
183	Failure	. 186
184	Failure Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitudes 170 Ft/Sec Transition	. 187
	Cruise Engine Failure	. 187

Figure	e Salaman, de la propieta de la companya de la com La companya de la co	Page
185	Three-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 170 Ft/Sec Transition Lift Engine Failure	. 188
186	Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes 170 Ft/Sec Transition Lift Engine	185
187	Failure Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitudes 170 Ft/Sec Transition	, 100
188	Lift Engine Failure	169
189	Failure During Transition Escape Concept  Effectiveness Index	189
109	Failure During Transition Escape Concept  Effectiveness Index	190
190	Normal Distribution for Manual Escape Initiation	191
191	Normal Distribution for Semiautomatic Escape Initiation	192
192	Method of Determining the Probability of Escape Initiation in Time for Successful Recovery for VTOL Hover	
193	and Transition Situations	195
194	Engine Failure	196
195	Engine Failure	197
196	Engine Failure	198
197	Engine Failure	199
198	Velocity Two-Man Subsonic VTOL Vehicle, Cruise Engine Failure, Open Ejection Seats	200
	Two-Man Subsonic VTOL Vehicle Lift Engine Failure Open Ejection Seats	200
199	Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VTOL Vehicle, Cruise Engine Failure Cockpit Pod Capsule	201
200	Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VCOL Vehicle, Lift Engine Failure	201
	Cockpit Pod Capsule	201

Figure		Pag
201	-0.6 g Aircraft Pushover During Conventional Taker or Landing Situations. Initial Velocity 250 Ft/Sec	
202	Altitude 0 to 500 Feet  -0.1 g Aircraft Pushover During Conventional Takeoff or Landing Situations. Initial Velocity 250 Ft/Sec Altitude 0 to 500 Feet	·. 203
203	0.4 g Aircraft Pushever During Conventional Takeoff or Landing Situations. Initial Velocity 250 Ft/Sec	204
204	0.8 g Aircraft Pushover During Conventional Takeoff or Landing Situations. Initial Velocity 250 Ft/Sec	. 205
205	Altitude 0 to 500 Feet	. 205
206	Four-Man Vehicle Landing and Takeoff Emergency Encapsulated Ejection Seat Minimum Escape	
207	Altitude -0.6 g Pushover	. 206
208	Pushover	. 206
209	Pushover.  Four-Man Vehicle Landing and Takeoff Emergency Open  Ejection Seat Minimum Escape Altitude -0.1 g	- 207
210	Pushover. Four-Man Vehicle Landing and Takeoff Emergency Enczpsulated Ejection Seat Minimum Escape	. 207
211	Altitude -0.1 g Pushcver	. 208
212	Pushover.  Four-Man Separable Nose Capsule Landing and Takeoff Emergency Minimum Escape Altitude -0.1 g	208
213	Pushover. Four-Man Vehicle Landing and Takeoff Emergency Open Ejection Seat Minimum Escape Altitude 0.4 g	. 209
214	Pushover	. 209
215	Altitude 0.4 g Pushover	. 210
	Pushover	. 210

Figure	를 가득하는 것이 있다면 하는 것으로 하는 것이 되었다. 그런 그들은 사람들은 사람들이 되었다는 것이 되었다. 사용하는 것은 것은 것은 것은 것은 것은 것이 없는 것은 것은 것은 것은 것은 것이 되었다. 그런 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없다.	Page
216	Four-Man Separable Nose Capsule Landing and Takeoff Emergency Minimum Escape Alticode 0.4 g	
217	Pushover	. 211
	Open Ejection Seat Minimum Escape Altitude 0.8 g Pushover	. 211
218	Four-Man Vehicle Landing and Takeoff Emergency Encapsulated Ejection Seat Minimum Escape	
219	Altitude 0.8 g Pushover	. 212
	Pushover	. 212
220	Four-Man Separable Nose Capsule Landing and Takeoff Emergency Minimum Escape Altitude 0.8 g	
	Pushover	. 213
221	Four-Man Vehicle Takeoff and Landing Escape Concept	040
	Effectiveness Evaluation	. 213
222	Probability of Successful Escape Versus Altitude for	
	Four-Man Vehicle Open Ejection Seats — Takeoff or	014
000	Landing Emergency	. 214
223	Probability of Successful Escape Versus Altitude for	12.0
	Four-Man Vehicle Cockpit Pod Capsule — Takeoff	. 215
224	or Landing Emergency	. 210
224	Factor Four-Man Vehicle Open Ejection Seats —	
	Takeoff or Landing Emergency	. 216
225	Probability of Successful Escape Versus Pushover Load	
	Factor Four-Man Vehicle Cockpit Pod Capsule —	
		. 216
226	Escape Conditions for Low Altitude Dash Mach 0.9	
227	Escape Conditions for Low Altitude Dash Mach 1.1	
228	Escape Conditions for Low Altitude Dash Mach 1.2	
229	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 0.9 Open Ejection Seat Minimum	
	Escape Altitude Zero g Pushover	. 221
230	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 0.9 Open Ejection Seat Minimum	
	Escape Altitude -1.0 g Pushover	. 222
231	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 0.9 Open Ejection Seat Minimum	
	Escape Altitude -2.0 g Pushover	. 222
232	Three-Man Combined Capability Vehicle Low Altitude	*
	Dash Mach 0.9 Open Ejection Seat Minimum	ř.
	Escape Altitude -3.0 g Pushover	. 223

Figure	<u> </u>	Page
283	Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9 Encapsulated Ejection Seat	223
234	Minimum Escape Altitude Zero g Pushover	. 223
	Dash Mach 0.9 Encapsulated Ejection Seat Minimum Escape Altitude -1.0 g Pushover	224
235	Three-Man Combined Capability Vehicle Low Aititude Dash Mach 0.9 Encapsulated Ejection Seat	. 224
236	Minimum Escape Altitude -2.0 g Pushover	. 224
237	Minimum Escape Altitude -3.0 g Pushover	. 225
	Dash Mach 0.9 Cockpit Pod Capsule Minimum Escape Altitude Zero g Pushover	. 226
238	Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9 Cockpit Pod Capsule Minimum	
239	Escape Altitude -1.0 g Pushover	. 226
240	Dash Mach 0.9 Cockpit Pod Capsule Minimum Escape Altitude -2.0 g Pushover	227
	Dash Mach 0.9 Cockpit Pod Capsule Minimum Escape Altitude -3.0 g Pushover	227
241	Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9 Separable Nose Capsule Minimum	••-
242	Escape Altitude Zero g Pushover	228
243	Escape Altitude -1.0 g Pushover	228
244	Escape Altitude -2.0 g Pushover	229
245	Escape Altitude -3.0 g Pushover	229
246	Dash Mach 1.1 Open Ejection Seat Minimum Escape Altitude Zero g Pushover Three-Man Combined Capability Vehicle Low Altitude	230
247	Dash Mach 1.1 Open Ejection Seat Minimum Escape Altitude -1.0 g Pushover	230
	Dash Mach 1.1 Open Ejection Seat Minimum Escape Altitude -2.0 g Pushover	231

Figure	주는 사람들이 되었다. 그런 그는 사람들이 되었다. 그는 그는 그는 그는 그는 그를 보고 있다. 그는 그는 그는 그는 그를 보고 있다. 	Page
248	Three-Man Combined Capability Vehicle Lov Altitude	
	Dash Mach 1.1 Open Ejection Seat Minimum	
	Escape Altitude -3.0 g Pushover	. 23
249	Three-Man Combined Capability Vehicle Low Altitude	- ,
	Dash Mach 1.1 Encapsulated Ejection Seat Minimum	
	Escape Altitude Zero g Pushover	. 23
250	Three-Man Comlined Capability Vehicle Low Altitude	· ANGLES
	Dash Mach 1.1 Encapsulated Ejection Seat Minimum	1
	Escape Altitude -1.0 g Pushover	. 23
251	Three-Man Combined Capability Vehicle Low Altitude	. 40.
	Dash Mach 1.1 Encapsulated Election Seat Minimum	
	Eccape Altitude -2.0 g Pushover	925
252	Three-Man Combined Capability Vehicle Lov Altitude	233
LUL	Dash Mach 1.1 Encapsulated Ejection Sent Minimum	
	Escape Altitude -3.0 g Pushover	
253	Three-Man Combined Capability Vehicle Low Altitude	- 233
200		
	Dash Mach 1.1 Cockpit Pod Capsule Minimum	
254	Escape Altitude Zero g Pushover	234
204	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 1.1 Cockpit Pod Capsule Minimum	
nee	Escape Altitude -1.0 g Pushover.	. 234
255	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 1.1 Cookpit Pod Capsule Minimum	
050	Escape Altitude -2.0 g Pushover	235
256	Three-Man Combined Capability Vehicle Low Altitude	-
	Dash Mach 1.1 Cockpit Pod Capsule Minimum	
	Escape Altitude -3.0 g Pushover	235
257	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 1.1 Separable Nose Capsule Minimum	
050	Escape Altitude Zero g Pushover.	- 236
258	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 1.1 Separable Nose Capsule Minimum	
	Escape Altitude -1.0 g Pushover	236
259	Three-Man Combined Capability Vehicle Low Altitude	
	Dach Mach 1.1 Separable Nose Capsule Minimum	
	Escape Altitude -2.0 g Pushover	237
260	Three-Man Combined Capability Vehicle Low Altitude	
	Dash Mach 1.1 Separable Nose Capsule Minimum	
	Escapo Altitude -3.0 g Pushover	237
261	Three-Man Combined Capability Venicle Low Altitude	
	Dash Mach 1.2 Open Ejection Seat Minimum Escape	
	Altitude Zero g Pushover	238
262	Three-Man Combined Capability Vehicle Low Altitude	200
	Dash Mach 1.2 Open Ejection Seat Minimum Escape	
	Altitude -1.0 g Pushover	238
		233

Figure			Page
263	Three-Man Combined Capability Venicle Low Altitude Dash Mach 1.2 Open Ejection Seat Minimum Escape		900
264	Altitude -2.0 g Pushover	•	239
in the same of the	Altitude -3.0 g Pushever		239
265	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Encapsulated Ejection Seat Minimum		
	Escape Altitude Zero g Pushover		240
266	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Encapsulated Ejection Seat Minimum	_	040
	Escape Altitude -1.0 g Pushover		240
267	Three-Man Combined Capability Vehicle Low Altitude		• 1
	Dash Mach 1.2 Excapsulated Ejection Seat Minimum Escape Altitude -2.0 g Pushover		241
268	Three-Man Combined Capability Vehicle Low Altitude	- •	471
200	Dash Mach 1.2 Encapsulated Ejection Seat Minimum		
er 171 Georgia	Escape Altitude -3.0 g Pushover		241
269	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Cockpit Pod Capsule Minimum		
	Escape Altitude Zero g Pushover		242
270	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Cockpit Pod Capsule Minimum		
	Escape Altitude -1.0 g Pushover		242
271	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Cockpit Pod Capsule Minimum		
. 070	Escape Altitude -2.0 g Pushover	•	243
272	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Cockpit Pod Capsule Minimum Escape Altitude -3.0 g Pushover		243
273	Three-Man Combined Capabilit Vehicle Low Altitude	•	240
210	Dash Mach 1.2 Separable Nose Capsule Minimum		
	Escape Altitude Zero g Pushover		244
274	Three-Man Combined Capability Vehicle Low Altitude	•	~11
	Dash Mach 1.2 Separable Nose Capsule Minimum		
	Escape Altitude -1.0 g Pushover		244
275	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Separable Nose Capsule Minimum	1	
	Escape Altitude -2.0 g Pushover		245
276	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Mach 1.2 Separable Nose Capsule Minimum		
,	Escape Attitude -3.0 g Pushover		245
277	Three-Man Combined Capability Vehicle Low Altitude		
	Dash Escape Concept Effectiveness Index Versus		
	Norma. Load Factor During Pushover, Mach 0.9		246

Figure	500 - 일본 이번 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100 - 100		Page
278	Three-Man Combined Capability Vehicle Low Altitude		
1. 7/42 %.	Dish Escape Concept Effectiveness Index Versus		0.40
	Normal Load Factor During Pushover, Mach 1.1	•	246
279	Three-Man Combined Capability Vehicle Low Altitude Dash		
	Escape Concept Effectiveness Index Versus Normal		
	Load Factor During Pushover, Mach 1.2	•	247
280	Three-Man Combined Capability Vehicle Escape Concept		
	Effectiveness Versus Mach Number During Pushover		
	at Low Altitude Dash	•	247
281	Four-Man Supersonic Dash Vehicle Mach 0.9 Open		
	Ejection Seat Minimum Escape Altitude Zero g		
25.0	Pushover	•	248
282	Four-Man Supersonic Dash Vehicle Mach 0.9 Open Ejection		
	Seat Minimum Escape Altitude -1.0 g Pushover	•	248
283	Four-Man Supersonic Dash Vehicle Mach 0.9 Open Ejection		
	Seat Minimum Escape Altitude -2.0 g Pushover		249
284	Four-Man Supersonic Dash Vehicle Mach 0.9 Open Ejection		
	Seat Minimum Escape Altitude -3.0 g Pushover		249
285	Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated		
	Ejection Seat Minimum Escape Altitude Zero g		
	Pushover		250
286	Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated		
	Ejection Seat Minimum Escape Altitude -1.0 g		
	Pushover		250
287	Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated		
. ن	Ejection Seat Minimum Escape Altitude -2.0 g		
	Pushover		251
288	Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated		
	Ejection Seat Minimum Escape Altitude -3.0 g		
	Pushover		251
289	Four-Man Supersonic Dash Vehicle Mach 0.9 Cockpit		
	Pod Capsule Minimum Escape Altitude Zero g		
	Pushover		252
290	Four-Man Supersonic Dash Vehicle Mach 0.9 Cockpit Pod	-	
	Capsule Minimum Escape Altitude -1.0 g Pushover		252
291	Four-Man Supersonic Dash Vehicle Mach 0.9 Cockpit Pod		
	Capsule Minimum Escape Altitude -2.0 g Pushover		253
292	Four-Man Supersonic Dash Vehicle Mach 0.9 Cockpit Pod		•
	Capsule Minimum Escape Altitude -3.0 g Pushover		253
293	Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose		
•	Capsule Minimum Escape Altitude Zero g Pushover	•	254
294	Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose		
	Capsule Minimum Escape Altitude -1.0 g Pushover		254

Figure	기계 등에 가는 사람들이 되었다. 그는 사람들이 되었다. 그런 사람들이 가는 사람들이 되었다. 그는 사람들이 되었다. 그는 사람들이 되었다. 그는 사람들이 되었다. 그런	]	Page
295	Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose		
	Capsule Minimum Escape Altitude -2.0 g Pushover	•	255
296	Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose		
	Capsule Minimum Escape Altitude -3.0 g Pushover	•	255
297	Four-Man Supersonic Dash Vehicle Mach 1.1 Open Ejection		
	Seat Minimum Escape Altitude Zero g Pushover	•	256
298	Four-Man Supersonic Dam Vehicle Mach 1.1 Open Ejection		00.0
	Seat Minimum Escape Altitude -1.0 g Pushover	• ,	256
299	Four-Man Supersonic Dash Vehicle Mach 1.1 Open Ejection		or m
	Seat Minimum Escape Altitude -2.0 g Pushover	.*	257
300	Four-Man Supersonic Dash Vehicle Mach 1.1 Open Ejection		057
	Seat Minimum Escape Altitude -3.0 g Pushever		257
301	Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated	a N	
	Ejection Seat Minimum Escape Altitude Zero g		050
0.00	Pushover	. •	258
302	Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated		
	Ejection Seat Minimum Escape Altitude -1.0 g		nr o
303	Pushover	•	258
303	Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated		
	Ejection Seat Minimum Escape Altitude -2.0 g Pushover		259
304	Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated	٠	200
304	Ejection Seat Minimum Escape Altitude -3.0 g		
	Pushover		259
305	Four-Man Supersonic Dash Vehicle Mach 1.1 Cockpit Pod	•	1100
, 000	Capsule Minimum Escape Altitude Zero g Pushover		260
306	Four-Man Supersonic Dash Vehicle Mach 1.1 Cockpit Pod	•	200
	Capsule Minimum Escape Altitude -1.0 g Pushover	_	260
307	Four-Man Supersonic Dash Vehicle Mach 1.1 Cockpit Pod	•	
	Capsule Minimum Escape Altitude -2.0 g Pushover		201
308	Four-Man Supersonic Dash Vehicle Mach 1.1 Cockpit Pod		
	Capsule Minimum Escape Altitude -3.0 g Pushover		261
309	Four-Man Supersonic Dash Vehicle Mach 1.1 Separable Nose		
	Capsule Minimum Escape Altitude Zero g Pushover	•	262
310	Four-Man Supersonic Dash Vehicle Mach 1.1 Separable Nose		
	Capsule Minimum Escape Altitude -1.0 g Pushover	• .	262
311	Four-Man Supersonic Dash Vehicle Mach 1.1 Separable Nose		
	Capsule Minimum Escape Altitude -2.0 g Pushover	•	263
312	Four-Man Supersonic Dash Vehicle Mach 1.1 Separable Nose		
	Capsule Minimum Escape Altitude -3.0 g Pushover		263
313	Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection		
	Seat Minimum Escape Altitude Zero g Pushover		264
314	Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection		
	Seat Minimum Escape Altitude -1.0 g Pushover	•	264

Figure	ÍMBE ÍRÍÐUR SEM KALLÍÐUR SEM Í UR Í UR SEM Í	Page
315	Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection	
0.10	Seat Minimum Escape Altitude -2.0 g Pushover	265
316	Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection	
	Seat Minimum Escape Altitude -3.0 g Pushover	265
317	Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated	
	Ejection Seat Minimum Escape Altitude Zero g Pushover .	266
318	Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated	
	Ejection Seat Minimum Escape Altitude -1.0 g	
	Pushover	266
319	Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated	
	Ejection Seat Minim: m Escape Altitude -2.0 g	
	Pushover	267
320	Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated	
	Ejection Seat Minimum Escape Altitude -3.0 g	
	Fushover	267
321	Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod	
	Capsule Minimum Escape Altitude Zero g Pushover	268
322	Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod	
600	Capsule Minimum Escape Altitude -1.0 g Pushover	268
323	Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod	
004	Capsule Minimum Escape Altitude -2.0 g Pushover	269
324	Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod	0.00
325	Capsule Minimum Escape Altitude -3.0 g Pushover Four-Man Supersonic Dash Vehicle Mach 1.2 Separable Nose	269
323	Capsule Minimum Escape Altitude Zero g Pushover	270
326	Four-Man Supersonic Dash Vehicle Mach 1.2 Separable Nose	270
020	Capsule Minimum Escape Altitude -1.0 g Pushover	270
327	Four-Man Supersonic Dash Vehicle Mach 1.2 Separable Nose	210
00.	Capsule Minimum Escape Altitude -2.0 g Pushover	271
328	Four-Man Supersonic Dash Vehicle Mach 1.2 Separable Nose	211
	Capsule Minimum Escape Altitude -3.0 g Pushover	271
329	Four-Man Supersonic Dash Vehicle - Low Altitude Dash	* 1 *
	Escape Concept Effectiveness Index Versus Load Factor	
	During Pushover, Mach 0.9	272
330	Fou -Man Supersonic Dash Vehicle - Low Altitude Dash	: -
	Escape Concept Effectiveness Index Versus Load	
	Factor During Pushover, Mach 1.1	272
331	Four-Man Supersonic Dash Vehicle - Low Altitude Dash	
	Escape Concept Effectiveness Index Versus Load	
•	Factor During Pushover, Mach 1.2.	273
332	Four-Man Supersonic Dash Vehicle Escape Effectiveness	
	Versus Mach Number During Pushover at Low Altitude	
	Dash	273

Figure	발표하는 것이 되었다면 생각이 생각을 하고 있다. 그는 사람들이 되었다면 되었다. 	Page
<b>33</b> 3	Probability of Successful Escape Versus Altitude Four-Man	
	Vehicle pen Ejection Seats, Mach 0.9	. 274
334	Probability of Successful Escape Versus Altitude Four-Man	
	Vehicle with Open Ejection Seats, Mach 1.1	. 275
335	Probability of Successful Escape Versus Altitude Four-Man	er in the second
	Vehicle with Open Ejection Sects, Mach 1.2	. 276
336	Probability of Successful Escape Versus Altitude Four-Man	
	Vehicle, Cockpit Pod Capsule, Mach 0.9	. 277
337	Probability of Successful Escape Versus Altitude Four-Man	
	Vuhicle, Cockpit Pod Capsule, Mach 1.1	. 278
338	Probability of Successful Escape Versus Altitude Four-Man	
	Vehicle, Cockpit Pod Capsule, Mach 1.2	. 279
339	Four-Man Vehicle Open Ejection Seats Mach 0.9 Probability	4
	of Initiating Successful Escape Versus Pushover g	. 280
340	Four-Man Vehicle Open Ejection Seats Mach 1.1 Probability	
	of Initiating Successful Escape Versus Pushover g	280
341	Four-Man Vehicle Open Ejection Seats Mach 1.2 Probability	
	of Initiating Successful Escape Versus Pushover g	. 281
342	Four-Man Vehicle Cockpit Pod Capsule Mach 0.9 Probability	
	of Initiating Successful Escape Versus Pushover g	281
343	Four-Man Vehicle Cockpit Pod Capsule Mach 1.1 Probability	
044	of Initiating Successful Escape Versus Pushover g	282
344	Four-Man Vehicle Cockpit Pod Capsule Mach 1.2 Probability	
345	of Initiating Successful Escare Versus Pushover g	282
340	Four-Man Vehicle Open Ejection Seats, Probability of	
346	Successful Escape Versus Mach Number	283
040	Four-Man Cockpit Pod Capsule Probability of Successful	
347	Escape Versus Mach Number.	283
<u> </u>	Escape Concept Evaluation Factors	288

#### TABLES

Table l	<b>Vo.</b>	Page
L	Open Ejection Seat Weight Breakdown	40
п	Encapsulated Seat Weight Breakdown	44
Ш	Cockpit Pod Capsule Design Data	62
IV	Separable Nose Capsule Design Lata	91
$\mathbf{v}$	Subsystem Developmental Testing Cockpit Pod	
	Capsule/Separable Nose Capsule	117
VI	Qualification Test Summary	119
VII	Development Cost Summary	133
VIII	VTOL Hover and Transition Flight Regime Escape Concept	
	Effectiveness Summary (Engine Failure Analysis)	190
IX	Manual Escape Initiation Time Normal Distribution Data	193
X	Semiautomatic Escape Initiation Time Normal Distribution	
	Data	194
XI	VTOL Hover and Transition Flight Automatic Detection and	
<u></u>	Initiation Evaluation Summary	199
XII	Low Altitude Flight Regime Escape Concept Effectiveness	
	Summary	218
XIII	Escape Concept Capabilities with Respect to Airspeed	284
XIV	Percentage of High Airspeed Envelope Protected by Various	
	Escape Concepts	285
XV	High Altitude Escape Index	285
XVI	Escape Concept Effectiveness Index	290
XVII	Survival Capability	291
XVIII	Factors Contributing to Ground Impact Fatalities	293
XIX	Escape Concept Functional Reliability	294
XX ·	Development/Qualification Cost Summary	294
XXI	Weight Penalty	295
XXII	Volume Penalty.	296
XXIII XXIV	Escape Concept Availability	298
XXV	Escape System Summary	299
XXVI	Crew Comfort and Efficiency	302
XXVII	Crew Flight Safety	304
AAVII	Escape Concept Trade Data Summary for Two-Man Subsonic VTOL Vehicle	306
XXVIII	Escape Concept Trade Data Summary for Three-Man	
	Combined Capability Vehicle	307
XXIX	Escape Concept Trade Data Summary for Four-Man	
	Supersonic Dash Vehicle	308
XXX	Automatic Detection and Initiation Evaluation	310

#### SECTION I

#### INTRODUCTION

The objectives of this study are to define convescape requirements and criteria for selection, evaluation and design of escape systems for VTOL and low-altitude dash vehicles. Crew escape requirements were defined in terms of escape concept performance, survival after landing, emergency pressuringtion, restraint, crew comfort and efficiency, and crew compartment integration. Test requirements for development, qualification, and verification of escape performance capability also were defined. Representative open ejection seat, encapsulated ejection seat, cockpit pod capsule, and separable nose capsule escape concepts and vehicle configurations were established. Basic escape concept performance capabilities with respect to vehicle altitude, descent angle, and speed were calculated. Special analyses and evaluations of escape concept effectiveness for VTOL hover and transition, conventional take-off and landing, and low-altitude dash flight regimes were accomplished. Also, analyses to evaluate automatic emergency detection and initiation were accomplished.

Escape concept trade data pertaining to escape capability, survival capability, reliability, cost, weight, volumetric penalty, availability, crew comfort and efficiency, and crew safety were developed. A summary of the trade data is presented and a rank order rating of the escape concepts with respect to each trade factor is provided. This will be useful as a guide in the selection, evaluation, and design of escape concepts for future advanced VTOL and low-altitude dash vehicles.



#### SECTION II

#### PRELIMINARY INVESTIGATION

#### 1. ESCAPE SYSTEM GOALS AND REQUIREMENTS

Escape system goals and requirements with respect to escape capability, survival equipment, emergency pressurization, restraint, crew comfort and efficiency, and crew compartment integration have been defined for use as guidelines for the establishment of design criteria and the evaluation of crew escape concepts. Three types of vehicles were considered in this study: (1) subsonic VTOL vehicle; (2) supersonic low-altitude dash vehicle; and (3) combined capability vehicle, having both VTOL and supersonic dash capability.

#### a. Escape System Capability

#### (1) VTOL Vehicle

The current state-of-the-art of VTOL technology does not permit a precise prediction of landing and take-off techniques or emergency escape conditions for advanced VTOL vehicles. Further, attitude control is sensitive to vehicle configuration, and numerous power and control alternatives are currently being considered. Thus, variations in control characteristics make it difficult to generalize emergency escape requirements. However, present VTOL design philosophy relating to flight safety and vehicle attitude control in the event of power failure may be used as a basis for establishing certain escape system goals. Current design philosophy will provide lift engine configurations that will minimize asymmetric thrust in the event of power failures. Also, compensation for asymmetric thrust will be provided by automatic actuation of the control system and by automatic termination of thrust on opposing lift engines. Ideally a power failure would result in the VTOL vehicle crashing in a controlled level attitude. A minimum acceptable design would be a vehicle capable of maintaining sufficient attitude control for a limited period of time to permit emergency escape. Based on preliminary estimates of control requirements and VTOL vehicle dynamics, it is reasonable to presume that vehicle pitch and roll rates can be limited so as not to exceed 0.5 radian per second. Therefore, for the purposes of this preliminary analysis, pitch and roll rates of 0.5 radian per second are used as a basis for defining limiting escape conditions for VTOL vehicles.

Escape system capability requirements for the VTOL vehicle are defined as follows:

- During level flight for all combinations of airspeed and altitude as shown on Fig. 1 for the VTOL vehicle.
- At ground level from zero speed to the maximum speed capability of the vehicle (Mach 0.9 at sea level).
- During all phases of conventional takeoff and landing.
- During all phases of the representative normal vertical takeoff as defined in Fig. 2.
- During all phases of the representative normal vertical landing as defined in Fig. 3.

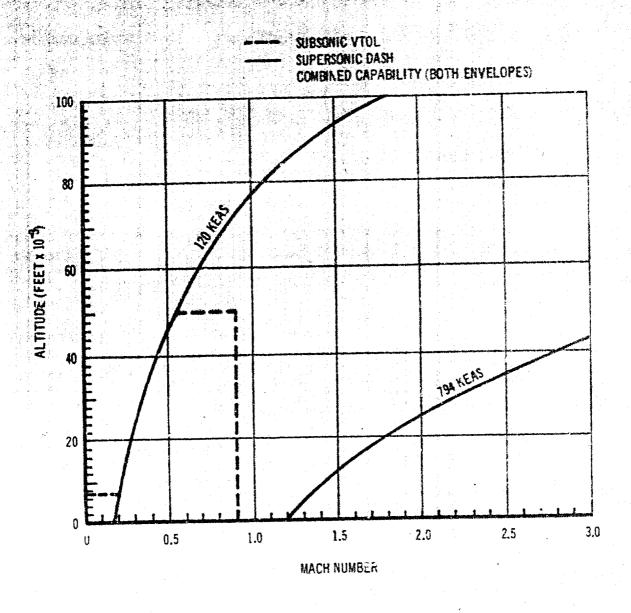


Figure 1. Flight Envelopes

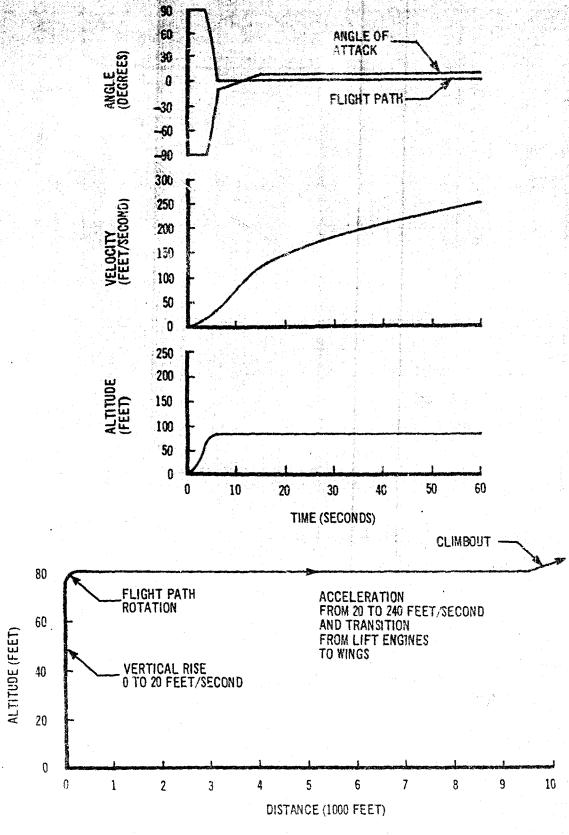


Figure 2. Normal Vertical Takeoff

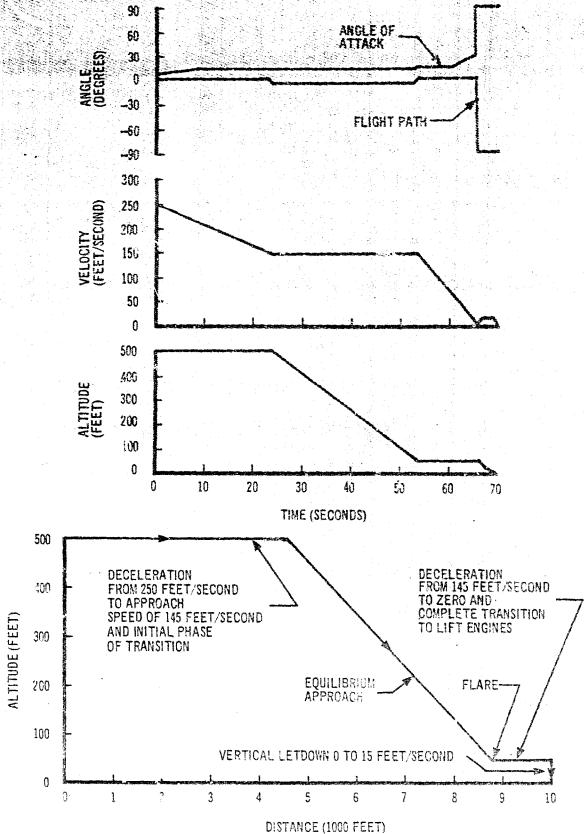


Figure 3. Normal Vertical Landing

• During the vertical takeoff and landing emergency conditions shown on Figs. 4 and 5: free-fall conditions for level attitude, rolling, and pitching during descent as defined on the accompanying graphs; and maximum pushover conditions as defined in the flight path angle and velocity graphs.

NOTE: The free-fall and maximum pushover emergency conditions are believed to represent the limiting or most severe excape conditions that might be expected to occur during vertical takeoff or landing and during transition. However, the escape system must be capable of providing successful escape and recovery, during emergency conditions, that might be defined as combinations or interpolations between the free-fall and maximum pushover conditions.

• During inflight emergencies that result in escape at combinations of altitude, dive angles, and airspeeds (up to Mach 0.9) shown on Fig. 6.

#### (2) Low-Altitude Dash Vehicle

Escape system capability requirements for the low-altitude dash vehicle are defined as follows:

- During level flight at all combinations of airspeed and altitude within the flight envelope (as shown in Fig. 1) for the low-altitude dash vehicle.
- At ground level from zero speed up to the maximum speed capability of the vehicle (Mach 1. 2 at sea level).
- During all phases of conventional takeoff and landing.
- During inflight emergencies that result in escape at combinations of airspeed, altitude, and dive angles as shown in Fig. 6.

The escape system must be capable of providing safe escape at the minimum possible altitude during the emergency conditions represented by the maximum pushover maneuver capability of the vehicle as shown in Fig. 7. Sustained flight at transonic speeds 200 feet above the terrain must be considered a design criteria.

#### (3) Combined Capability Vehicle

The escape system capability requirements for the combined capability vehicle include all the conditions defined for both the VTOL and low-altitude dash vehicles.

#### b. Survival Equipment

Survival equipment must provide for: survival and rescue on land or water during environmental extremes, keeping survivors afloat in water, temporary emergency shelter on land or water, emergency rations and a means for obtaining food and water, survival clothing and equipment to assist the survivor in keeping as comfortable as possible and in good physical and

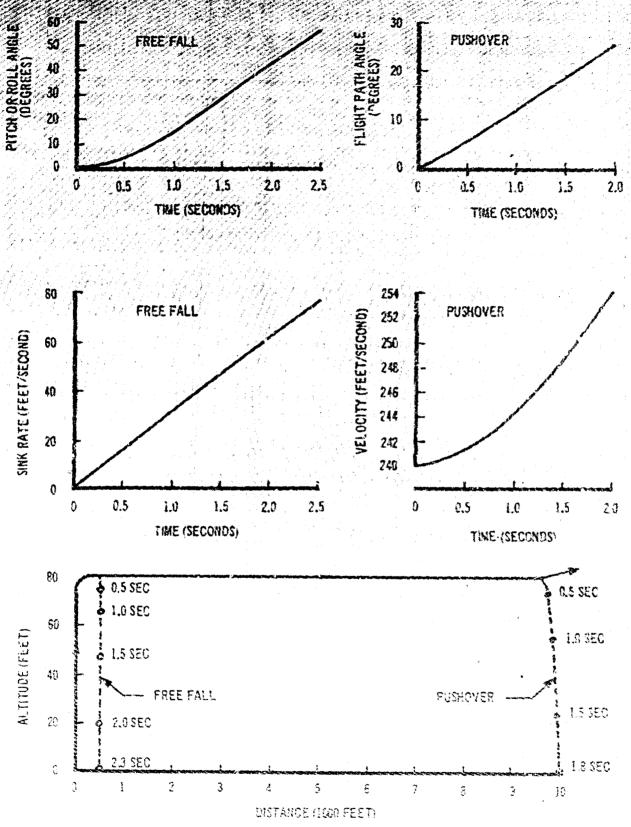


Figure 4. Vertical Takeoff Emergency Conditions

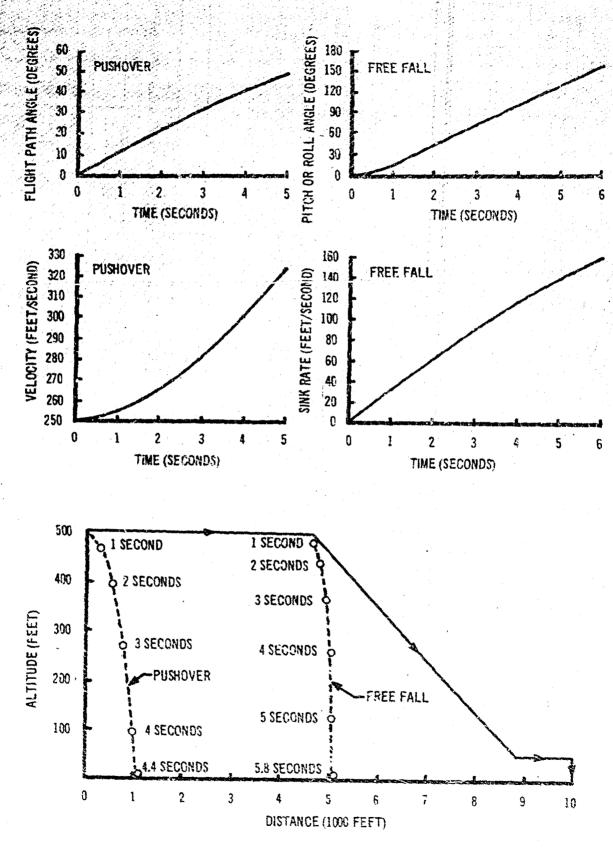


Figure 5. Vertical Landing Emergency Conditions

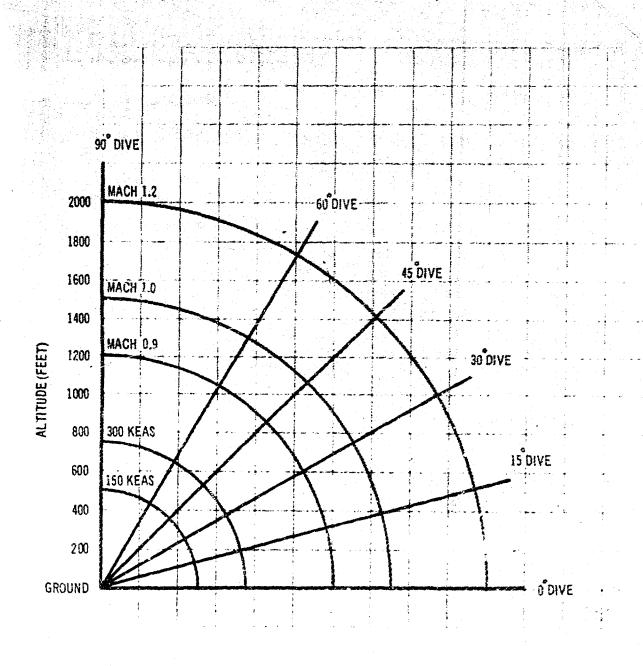


Figure 6. Altitude, Dive Angle, and Airspeed Escape Criteria

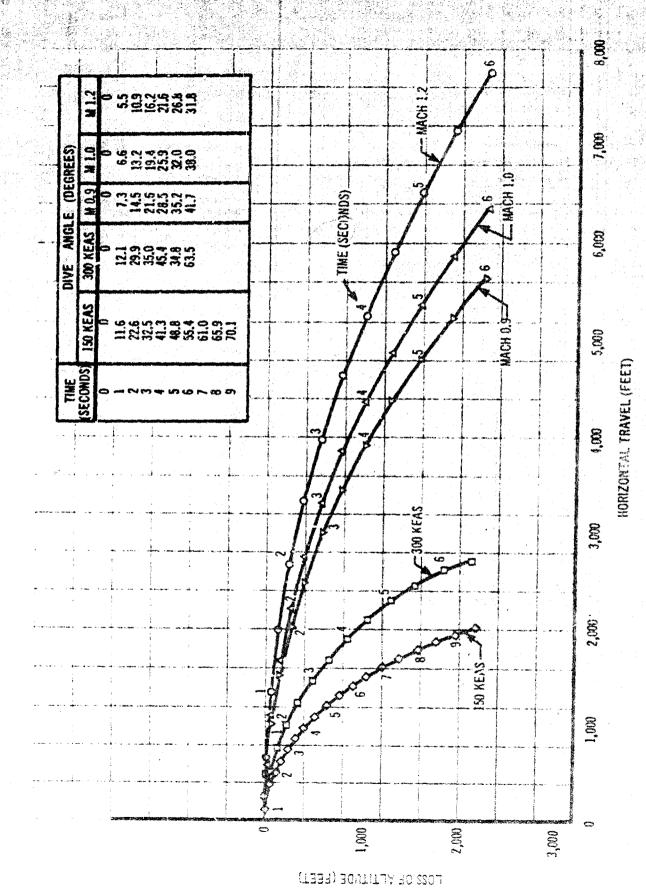


Figure 7. Auplane Trajectories for Pushaver at Sea Level

mental condition, a means for assisting the survivor in taking evasive measures to prevent capture by the enemy, and communication through automatic or manual signalling or tracking devices to facilitate location of survivors during rescue operations.

# c. Emergency Pressurization and Breathing Atmosphere

A survivable pressure level and breathing atmosphere must be maintained by either mechanical backup systems or pressure suit during inflight emergencies such as ejection, cabin depressurization, or oxygen system failure.

Emergency pressurization and oxygen must be provided to operate automatically and be capable of providing a survivable pressure level and breathing oxygen during escape and descent from the maximum aititude capability of the vehicle. Emergency pressurization also must be provided to protect the crewmember in the event of primary pressurization failure when emergency escape from the aircraft is not mandatory.

A system must be incorporated to actuate emergency pressurization that is separate and independent of automatic pressure regulation.

#### d. Restraint

Adequate restraint during flight, emergency escape, and crash landing must be provided.

The head, limbs, and torso must be supported and restrained from any movement which could cause injury during aircraft launching, normal flight involving high accelerations, uncontrolled flight, crash landing, and throughout an emergency escape operation.

Restraint must be adequate to sustain the combined forces of deceleration, tumbling, and windblast that could be experienced under the most adverse escape conditions.

The restraint system must be capable of integrating into a "shirt-sleeve" environment and must not appreciably compromise crew comfort, efficiency, or effectiveness, and must be manually adjustable to suit individual requirements. It must be automatic during adverse acceleration load conditions and during the escape sequence. Simultaneous release of all restraints must be accomplished by a single action (manual and automatic), and must provide for ingress to and egress from the seat without assistance and with a minimum of motions. It must be easy to operate, lightweight, and allow freedom of movement when restraint is not required.

### e. Crew Comfort and Efficiency

A comfortable and livable environment must be achieved for optimum efficiency and effectiveness of the aircrew throughout the performance envelope of the vehicle. The aircrew must be relieved of as many protective encumbrances as possible, and minimum restrictions must be imposed by the escape system on efficient use of cockpit space, and must allow the aircrew to operate all

required equipment in an efficient manner with minimum restriction of aircrew movement during normal flight. It must also provide for adequate cushioning and energy absorption which will result in maximum comfort and support.

# f. Crew Compartment Integration

The escape system must be designed to be completely integrated and compatible with the design of the parent aircraft, must not compromise the aircrew station nor the operator's function, and must not adversely affect the performance or mission capability of the aircraft.

The integrity of the parent aircraft must not be penalized by the addition of emergency escape capabilities within the crew compartment. Escape system space requirements must be minimized to provide for greater flexibility of displays and controls location and arrangement, and must allow for location of controls and instrument consoles that are compatible with arm reach requirements of 5 to 95 percentile crewmen. The maximum practicable vision must be provided for crewmembers.

## 2. AUTOMATIC DETECTION AND ESCAPE INITIATION

The primary cause of unsuccessful utilization of escape systems in current aircraft is the failure of the crewmember to actuate the escape system in time for successful recovery prior to ground impact. This will become even more critical for the hazardous flight conditions of future VTOL and low-altitude dash vehicles.

Airplane trajectories for maximum hard nose-over from low-level flight are shown in Fig. 8 for a -3g structural limit at Mach 0.9, 1.0, and 1.2, and an aerodynamic capability limit of -2,38g at 300 KEAS and -0.6g at 150 KEAS. This illustrates limiting conditions from which escape might be required for a representative low-altitude dash vehicle. The 1.8-second time line represents the time required for a crewmember to sense the emergency (0.10 second), decide to escape (1.5 seconds), and actuate the escape system (0.20 second). These times are based on trained personnel, simple stimulus, simple decision alternatives, and negligible delay attributed to mental duress. Under actual emergency conditions the human reaction time is expected to be significaptly greater. As illustrated, the time required for human initiation of the escape system precludes the possibility of successful escape for a maximum hard nose-over emergency occurring at the prescribed vehicle dash capability of transonic speed at 200 feet above the terrain. For even significantly less severe low-altitude dash emergencies, it is extremely unlikely that a crewman would be capable of actuating the escape system in time to effect successful escape. Examination of the escape conditions for the VTOL vehicle (Figs. 4 and 5) reveals that escape initiation time for the vertical takeoff and landing emergencies is also extremely critical. For emergencies occurring within 200 feet of the ground, human reaction time would essentially preclude the possibility of successful escape. At slightly higher altitudes escape must be initiated on a timely basis to preclude the possibility of escape initiation at an undestrable attitude.

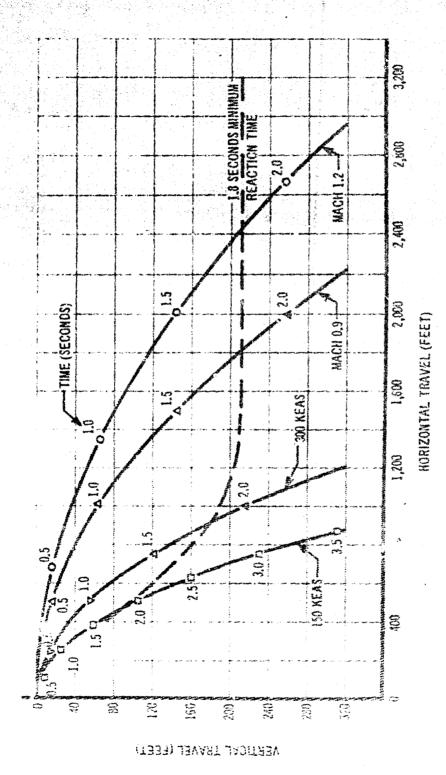


Figure 8. Airplane Indectories for Hard Pushaver Maneuver


A preliminary analysis of a basic automatic escape initiation system was accomplished to provide background and insight into the feasibility of such a system. Figure 9 is a block diagram showing the air vehicle systems required for data input and the logic diagram for the escape initiation computer. For this initial investigation, the escape variables were limited to vehicle speed, altitude, and dive angle. Automatic escape initiation is signalled at the time the vehicle flight factors indicate that the vehicle has reached a nonrecoverable flight condition.

Vehicle systems required for inflight measurements of airspeed and height above terrain are provided in military airplanes by an air data computer and radar altimeter. The measurement of dive angle is more restricted in the sense that flight instruments, such as the artificial horizon, yield approximate values for display to the pilot; no provision is made for an output to other systems. A measurement of dive angle can be provided for use by the other systems only in airplanes equipped with a stable reference. This measurement is achieved by an algebraic combination of the pitch angle from the pitch reference and the true angle of attack from the air data computer.

Functionally, the air data computer requires input data from the pitotstatic system, outside air temperature sensor, and the angle of attack sensor.
The measured air data, static pressure, dynamic pressure, stagnation temperature, and indicated angle of attack are used by the computer in solving
standard air data equations. This computer is generally an analog mechanization and, typically, furnishes calculated values of Mach number, true airspeed, indicated airspeed, and air density ratio for display to the pilot or use
by other systems. For the application outlined the indicated airspeed, true
angle of attack, and air density ratio are obtainable with maximum errors of
±6.5 knots, ±0.1 degree, and ±0.10, respectively.

The radar altimeter is a special-purpose radar using fixed antennas to provide a measure of the range to the nearest terrain. The simplest and most accurate radar altimeters are pulse-type radars. The radar altitude is obtained by measuring the time delay between the transmitted pulse and the pulse reflected into the receiving antenna by the terrain below the airplane. At low altitude the accuracy is a function of the pulse width and altitude, being typically 50 ±0.91H feet, where H is the altitude to be measured.

Stable platforms are generally restricted to use in airplanes using a complex weapon delivery system, stability augmentation or inertial navigation systems. The stable reference is obtained by the use of gyros and a gimbal system. The gyros maintain a vertical reference, and, as the aircraft pitches or rolls, the gimbals make it possible to measure the magnitude of the excursion about the pitch and roll axes. The accuracy of measuring the pitch angle is traically to within three to five minutes of arc.

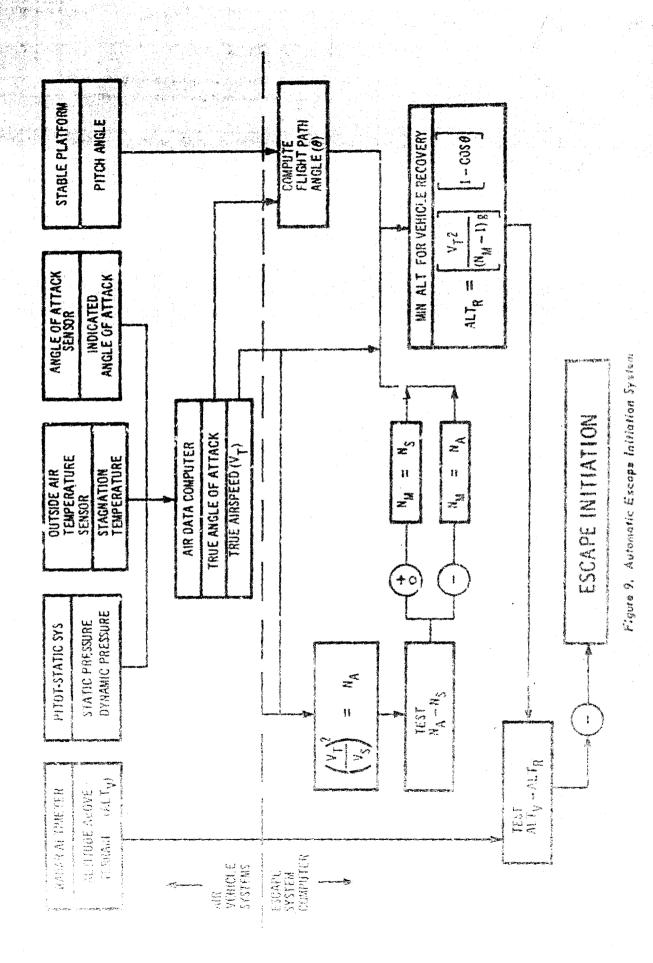

# Definition of Terms for Automatic Escape Initiation Computer:

V<sub>r</sub> = Vehicle true airspeed.

 $V_S$  = Vehicle stall speed (120 knots for study).

N<sub>A</sub> = Approximation of maximum positive load factor capability of vehicle based on aerodynamic lift.

N<sub>S</sub> = Maximum positive load factor capability of vehicle based on structural limit (+5g for study).

 $N_{M} = N_{A}$  or  $N_{S}$ , whichever is less, selected by computer.

 θ = Vehicle flight path angle, computed from vehicle pitch angle and true angle of attack.

ALT<sub>R</sub> = Minimum altitude above terrain required for vehicle recovery.

ALT, = Vehicle altitude above terrain.

g = Acceleration due to gravity.

Figures 10 and 11 show the altitude versus dive angle at which the prescribed automatic system would initiate escape for vehicle speeds of Mach 1,2 at sea level and 300 KEAS. Also plotted on the graphs is the predicted altitude needed for successful recovery of the crew with a cockpit capsule escape system. As is apparent from Figure 10, the automatic system would initiate escape at an altitude sufficient for successful escape for an escape situation occurring at a speed of Mach 1.2. However, Figure 11 indicates that the prescribed automatic initiation system would initiate escape at an altitude too low for successful escape at the lower speed of 300 KEAS. Therefore, the prescribed system would not be appropriate for the entire speed range considered. Additional logic could be programed into the escape initiation signal to limit the vehicle speed range during which the automatic escape initiation system would function. This would provide automatic escape only during the hazardous low altitude high speed dash flight regime. Evaluations of automatic escape initiation systems which would be appropriate for other flight regimes or types of emergencies is beyond the scope of this preliminary investigation. However, a more detailed analysis of the need for and benefits of automatic detection and escape initiation is presented in Section V.


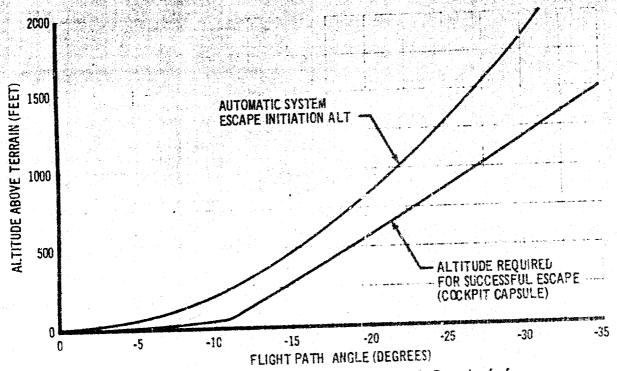


Figure 10. Automotic Escape Initiation Altitude Vs Dive Angle for Vehicle Speed Mach 1.2

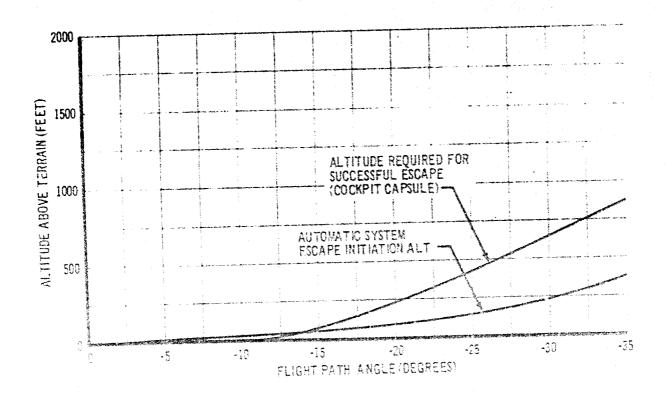

Pigure 11. Automotic Escape Initiation Altitude Vs Dive Angle for Vehicle Speed 300 KEAS

### SECTION III

# ESCAPE CONCLPT/VEHICLE CONFIGURATIONS AND CAPABILITIES

This section describes escape concepts and vehicle configurations, and basic escape concept capabilities for VTOL and supersonic dash vehicles. Three types of vehicles were considered: 1) subsonic VTOL vehicles: 2) supersonic low altitude dash vehicles; and 3) combined capability vehicles having both VTOL and supersonic dash capability. For this study, low-altitude dash capability is defined as the ability of sustained flight at transonic speeds 200 feet above the terrain. Crew size variations of two, three, or four crewmembers were considered for each vehicle. Escape concepts considered are open ejection seats, encapsulated ejection seats, cockpit pod capsules, and separable nose capsules.

Twelve escape concept/vehicle combinations, representative of the range of possible combinations of vehicles, crew size, and escape concepts, were selected for detailed study. The selected combinations are:

Vehicle	Crew Size	Escape Concept
Subsonic VTOL	2-man	Open ejection seat (OES)
Subscnic VTOL	2-man	Encapsulated ejection seat (EES)
Subsonic VTOL	2-man	Cockpit pod capsule (CPC)
Subsonic VTOL	2-man	Separable nose capsule (SNC)
Supersonic dash	4-man	Open ejection seat
Supersonic dash	4-man	Encapsulated ejection seat
Supersonic dash	4-man	Cockpit pod capsule
Supersonic dash	4-man	Separable nose capsule
Combined capability	3-man	Open ejection seat
Combined capability	3-man	Encapsulated ejection seat
Combined capability	3-man	Cockpit pod capsule
Combined capability	3-man	Separable nose capsule

The most effective escape system for each of the twelve representative escape concept/vehicle combinations was established. These systems are defined in terms of refinements and/or projections of current systems and preliminary designs of advanced systems. The most suitable subsystems for each application were selected and incorporated into particular designs. Subsystem considerations included functional adequacy, complexity, weight, cost, and developmental status. Preliminary design drawings are presented to show escape equipment installation requirements and typical crew compartment arrangements. System operation and time sequence is defined by schematic drawings and written descriptions.

A three-degrees-of-freedom digital computer program was used to optimize escape configuration parameters (such as boost rocket or eatapult thrust, thrust angle, thrust excentricity, stabilization, deceleration and recovery parachute sizes, event timing sequence, etc.) to give maximum escape capability. The computer program also was used to compute performance of the final escape systems. The program is capable of computing horizontal and vertical travel and pitch rotation for escapes utilizing any of the escape concepts considered herein. Program inputs include: aerodynamic force and moment

characteristics from wind tunnel tests; boost rocket thrust characteristics; deployment, filling, and drag characteristics of stabilization, deceleration, and recovery parachutes; timing is system sequence data; geometry and mass data; and sirplane flight commons at initiation of the escape sequence. Program outputs are printed as a function of elapsed time, and include aerodynamic coefficients and forces of the basic escape vehicle and each parachute, filling times of each parachute, and escape vehicle deceleration, velocity, displacement, pltch angle, angle of attack, and trajectory relative to the airplane. For this study, the most pertinent computer outputs were considered to be travel relative to the ground to establish minimum escape altitudes, and accelerations to define speed limitations of the different escape concepts. Basic capabilities of the escape concepts with respect to speed, descent angles, and altitude are presented in this section. More detailed analyses and evaluation of escape concept effectiveness for various emergency situations and flight regimes are presented in Section V.

# 1. OPEN EJECTION SEAT CONFIGURATIONS

# a. Configurations

The open ejection seat system configurated for this study consists of existing subsystems and those being developed. The system described is considered a feasible configuration and the optimum open ejection seat system operable within established human tolerance limits.

'The system was designed to provide safe escape from zero speed to 600 KEAS at ground level and up to 50,000 feet altitude.

Major subsystems and components of the system are: 1) canopy/hatch jettizon system; 2) initiation and eject sequence installation; recket-catapult (5,500 pound average thrust); 4) survival kit; 5) restraint sys a consisting of lap belt, shoulder harness and a ballistic powered inertia receio 6) directional automatic realignment of trajectory (DART) system; and 7) drop gun deployed 5-foot diameter stabilization/deceleration parachute and a 29.7- act diameter Skysail recovery parachute. The seat also has screw-type electromechanical actuators for vertical, fore and aft, and tilt adjustments. The maximum horizontal and vertical travel is approximately three and five inches respectively, and the seat can be tilted through a maximum range of ten degrees.

The system is initiated by operation of the arm rest ejection control or the D-ring located on the front of the seat bucket. After initiation, the sequence of operation is completely automatic; however, provisions are made to allow the seat occupant to manually override the events necessary for recovery. When the system is initiated the canopy/hatch is jettisoned and the crewman is automatically positioned and restrained in the seat. After time delays to permit the completion of pre-ejection events and to provide sequenced ejection of the crewmembers, the catapult ignites. As the seat clears the ejection rails, the DART system supplies force to initially stabilize the seat. At rocket burnout, the deceleration/stabilization parachute becomes effective and continues to stabilize and decelerate the seat, allowing deployment of the recovery parachute within minimum elapsed time.

The recovery parachute time delay is established by a speed sensor operated by the airplane pitot-static system when the escape system is initiated. The system event sequence for the high- and low-speed mode of operation for ejections below 15,000 feet is shown in Figure 12. The high-speed mode timing sequence is selected by the speed sensor when ejection is initiated at an airspeed of more than 200 KEAS. If escape is accomplished at high altitude, the man-seat is stabilized and descends to 15,000 feet before separation and deployment of the recovery parachute.

For this study, it was assumed that the airplane escape system would incorporate a command-select sequencing system that would permit the pilot or copilot to eject the entire crew at predetermined intervals.

The two-man subsonic VTOL vehicle cockpit seating arrangement selected for this study is shown in Fig. 13. The tandem arrangement will require the aft seat to clear the airplane 0.5 second before ejecting the forward seat. This time-delay will be sufficient to avoid possible injury, due to rocket-catapult effects, to the aft seat occupant, and will prevent collision and possible parachute entanglement. The above sequence will occur only if escape is initiated by the forward seat occupant. If escape is initiated by the aft seat control, the forward seat may or may not be ejected depending on the position of the command sequence control, which is located in the forward cockpit. The minimum elapsed time from escape initiation until both crewment clear the airplane is 1.06 seconds.

The three-man combined capability vehicle seating arrangement is shown in Fig. 14. The escape existem and command sequence for ejection is similar to the two-man airplane. When the escape system is initiated at the pilot's position, the aft seat is ejected, followed at 0.5 second intervals by the copilot and pilot seats. The minimum elapsed time for the entire crew to clear the airplane is 1.56 seconds after system initiation by the pilot.

The seating arrangement for the four-man supersonic dash vehicle is shown in Fig. 15. In this crew arrangement, escape initiation by the pilot or copilot will automatically eject the entire crew; however, either aft seat can be ejected individually and the pilot can elect to remain with the airplane. The systems function as described above and differ only in the command ejection control. When the escape system is initiated by the pilot, the time required for the entire crew to clear the airplane is 2.06 seconds. The order of ejection is the seat aft of the copilot, the seat aft of the pilot, and the seats of copilot and pilot. By allowing the ejection of the two aft seats before either forward seat, injury due to rocket-catapult blast (pressure and fire) is climinated.

### b. Performance

The dynamic performance of the open ejection seats was analyzed for each vehicle for speeds from zero to 600 KEAS. The calculated trajectories shown in Figures 16, 17 and 18 for the two-, three- and four-man vehicles indicates that after ground level ejections during level flight at speeds from zero to 600 KEAS, all crewmembers would be recovered well above the ground. The trajectories shown are for the last man to be ejected in the

command sequence modes as defined in the preceding paragraphs and include the time spent in the aircraft prior to seat/airplane separation for preseparation functions and ejection sequence time delays. Escape sequence initiation occurs at the origin of the graphs and the time lapse from initiation until the last man clears the aircraft is 1.06 seconds for the two-man vehicle, 1.56 seconds for the three-man vehicle, and 2.06 seconds for the four-man vehicle.

Figures 19 through 24 show the open ejection seat trajectories for escape during diving flight at 200 and 600 KEAS for each vehicle. These data are also for the last man to be ejected in the command sequence and include pre-separation functions and sequence time delays.

Figures 25, 26, and 27 show, for each vehicle, the altitude at which the escape sequence must be initiated for successful recovery of the entire crew versus airplane dive angle for various airspeeds.

A computer plot of the horizontal and vertical accelerations imposed on the crewman during escape at an airspeed of 600 KEAS at 15,000 feet is shown in Fig. 28. The parachute system deployment time sequence and parachute sizes were established to provide a maximum deceleration of 30g on the crewman during ejections occurring up to 600 KEAS. For 600 KEAS ejections at lower altitudes, the timing sequence results in a more rapid velocity decay and in lower deceleration loads when the recovery parachute deploys. See Fig. 29. The maximum peak g experienced during escapes from zero to 600 KEAS is shown in Fig. 20. Due to the low-speed event time sequence, the deceleration loads imposed during a 200 KEAS ejection approach the generally accepted human tolerance limits.

# c. Weight Penalty

Table I shows the weight breakdown for the open ejection seat escape concept. Weight penalties shown for the two-, three-, and four-man vehicles include the ejection seat installations, plus escape hatches, less the weight of basic nonejection seats.

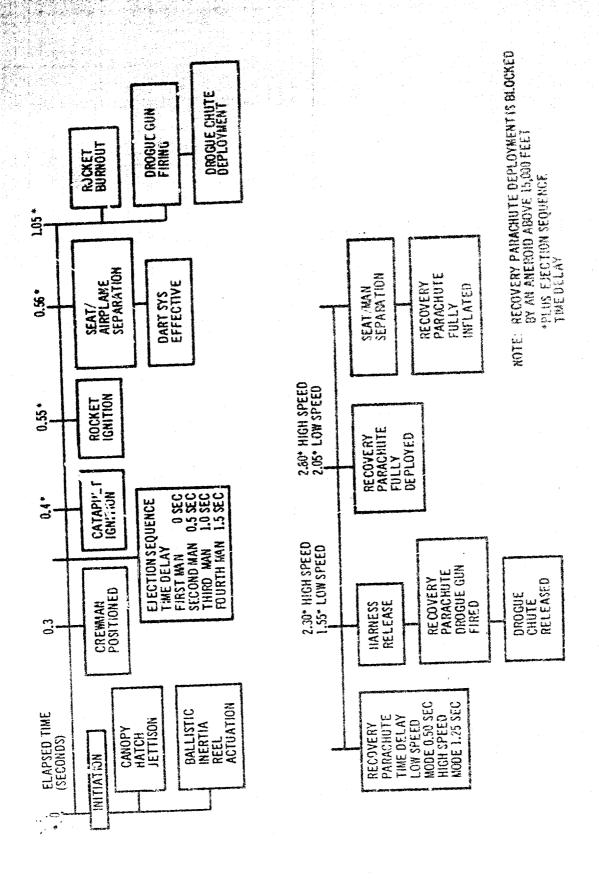


Figure 12. Black Diagram - Open Ejection Seat Event Sequence

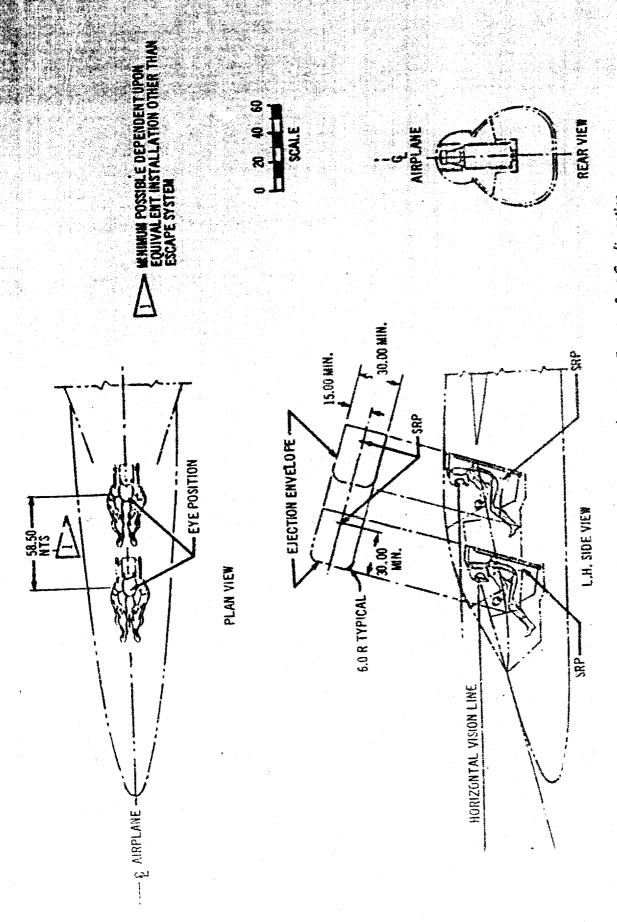


Figure 13. Twa-Man Subsonic YTOL Vehicle Open Ejection Seat Configuration

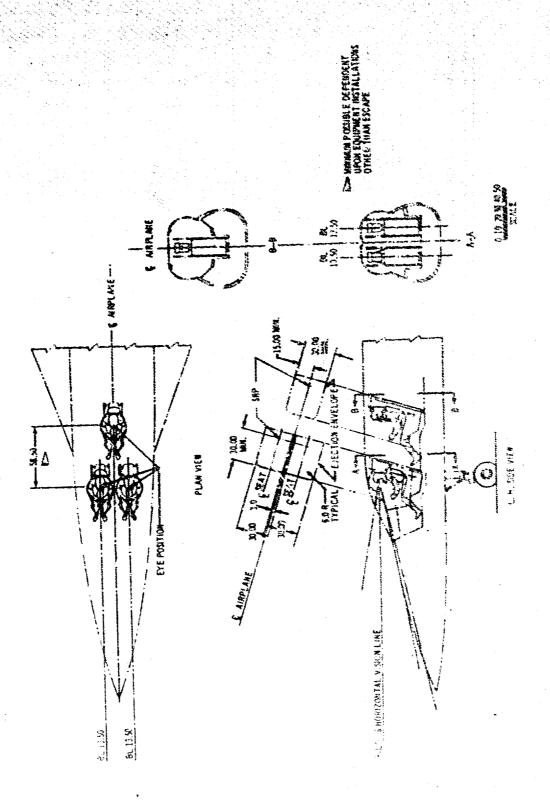


Figure 14. Three-Man Combined Capability Vehicle Open Rioction Seot. Configuration

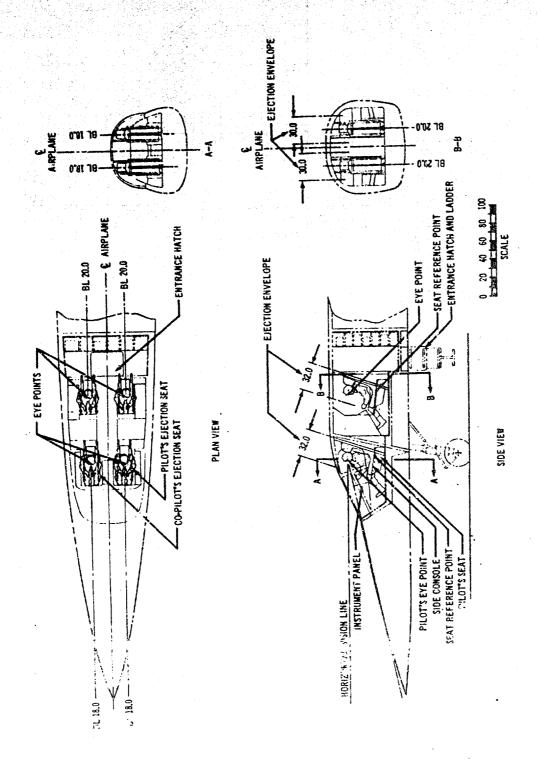


Figure 15. Four-Man Supersonic Dash Vehicle Open Ejection Seat Configuration

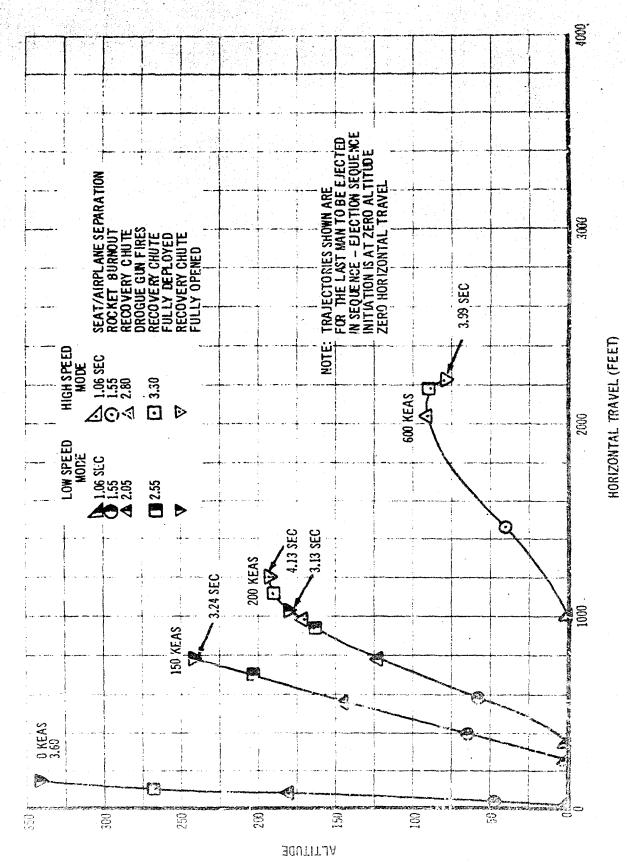


Figure 16. Two-Man Vehicse Open Ejection Seat Level Flight Trajectories

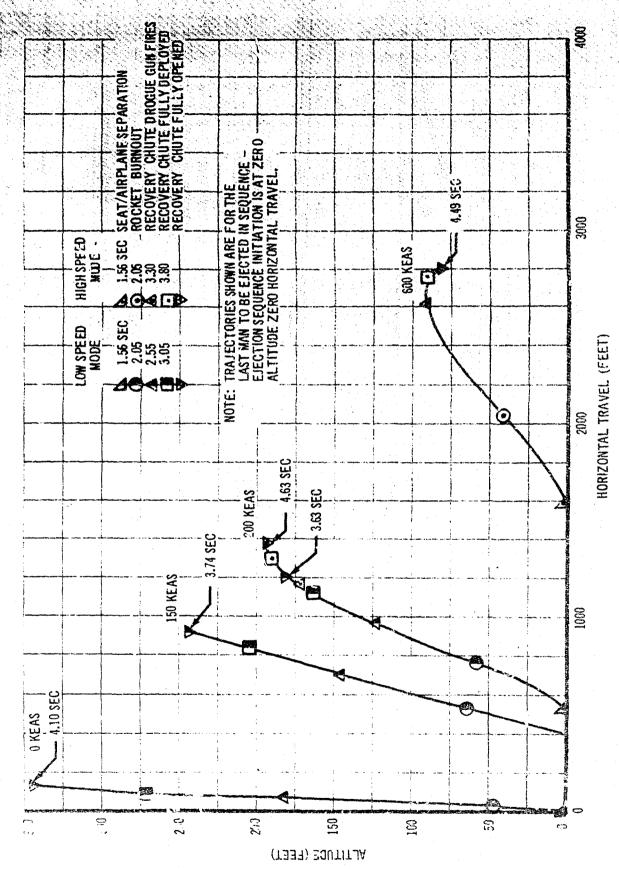


Figure 17. Three-Man Vehicle Open Ejaction Sout Level Fiight Trajectories

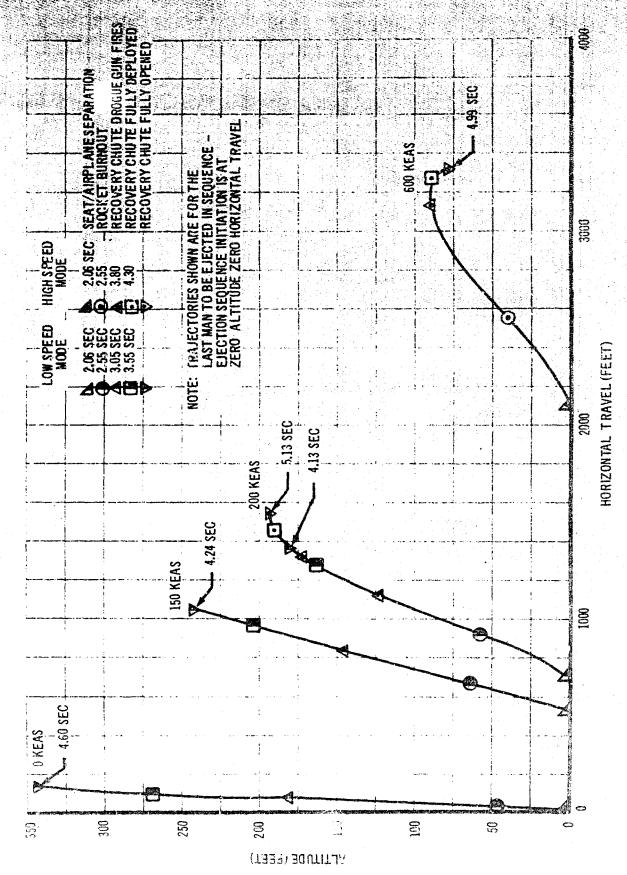


Figure 18. Four-Man Vehicle Open Ejection Seat Level Flight Trajectories

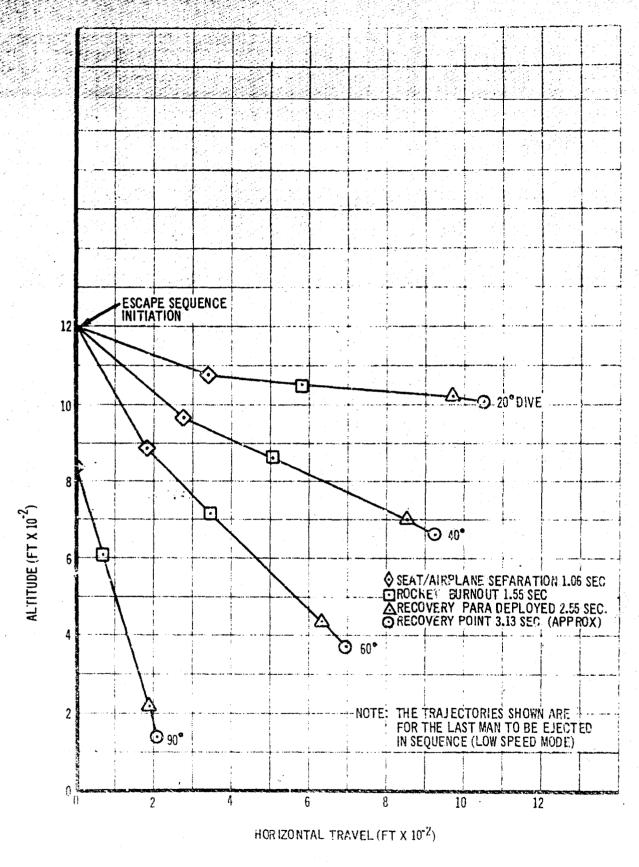


Figure 19. Two-Man Vehicle Open Ejection Seat Dive Trajectories, 200 Knots

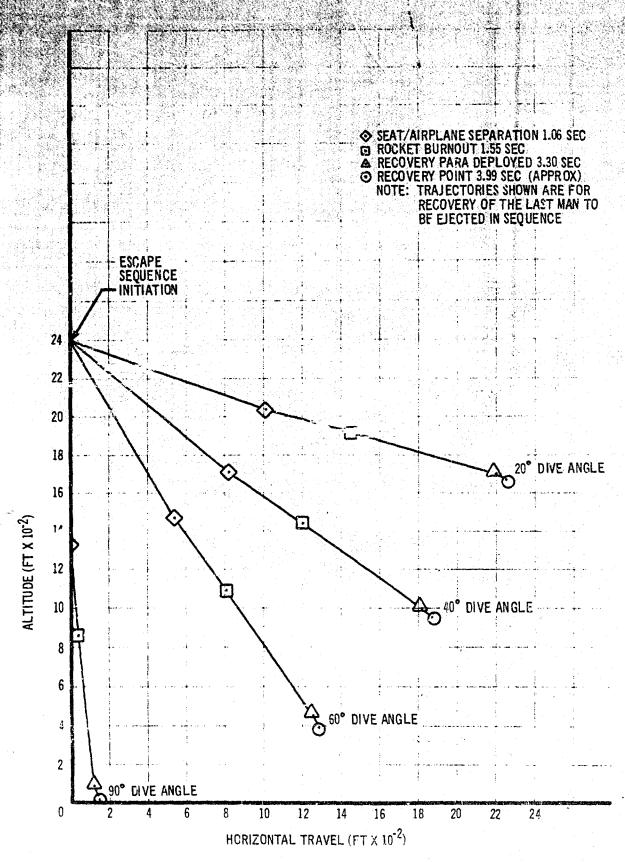


Figure 20. Two-Man Vehicle Open Ejection Seat Dive Trajectories, 600 Knots

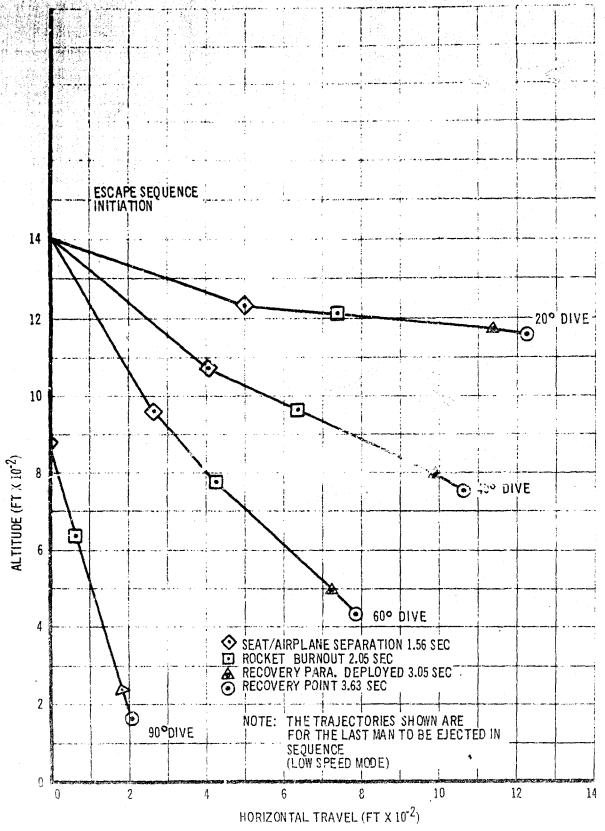


Figure 21. Three-Man Vehicle Open Ejection Seat Dive Trajectories, 200 Knots

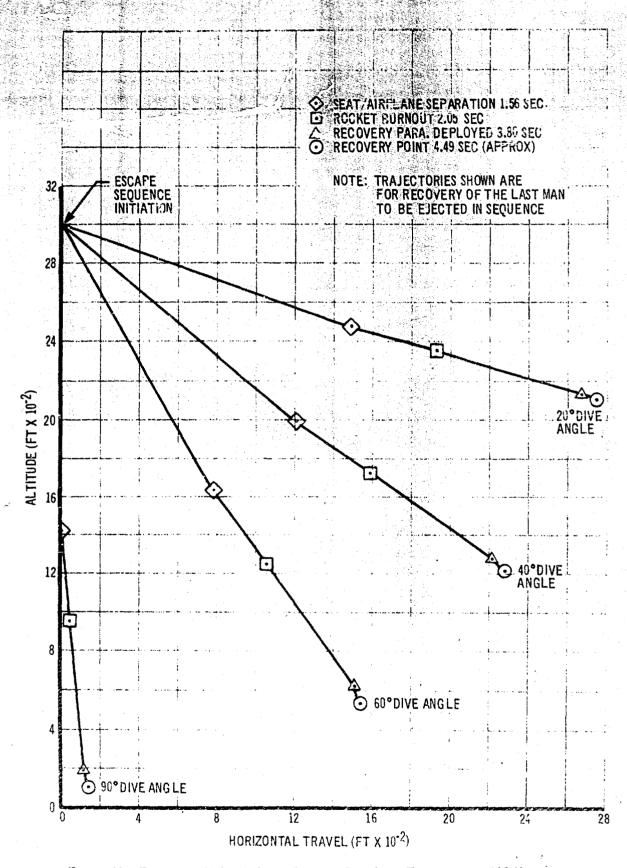


Figure 22. Three-Man Vehicle Open Ejection Seat Dive Trajectories, 600 Knots


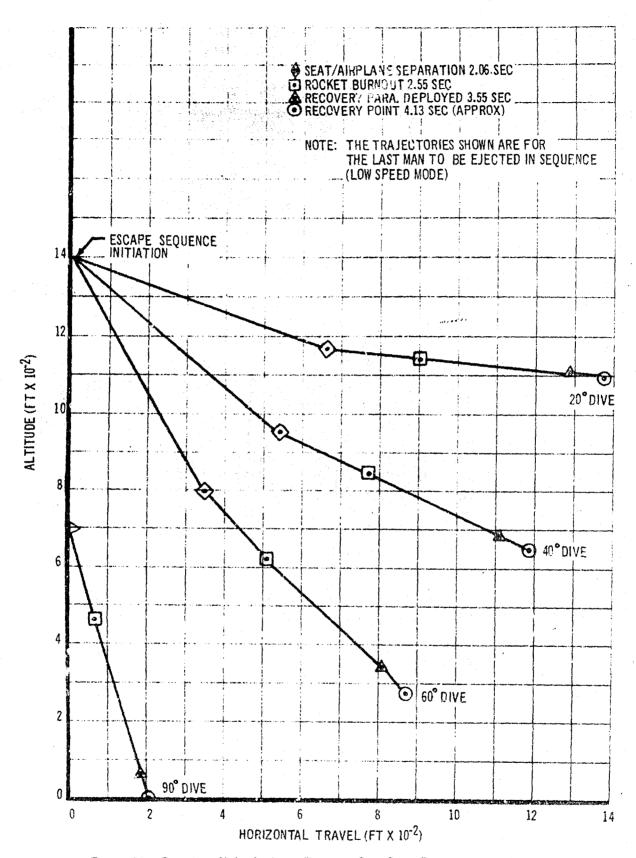


Figure 23. Four-Man Vehicle Open Ejection Seat Dive Trajectories, 200 Knots

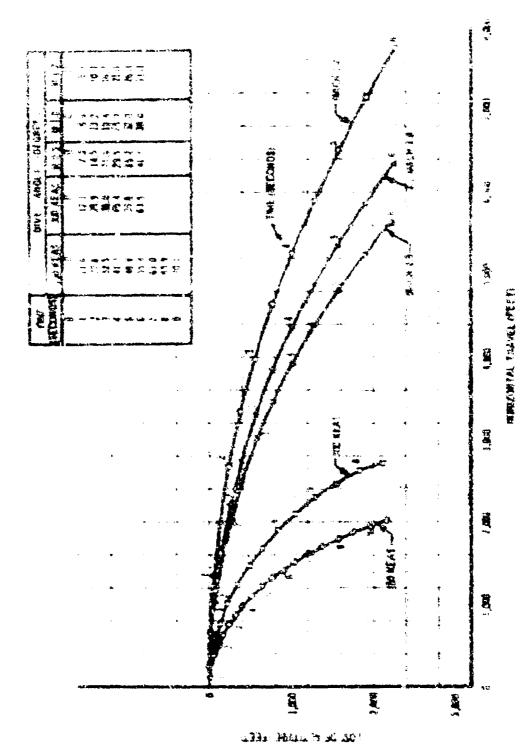

Physics E. Abgines Inspections in Pontiscus et Ses Louis

Smedgeony Pressurement and brew use fitted was fundament

A survivible presente level and president atmosphere must be madetained by subservance for the special continues for any individual leadings. Subservances and a special made depresentation, or continues at done

Innergency present rection and Types maint be strombed to operate antomatically and be capable of providing a survivable process; level and breath as carryen during social, and descent from the maximum artificial capability of the votable. France or commercially also must be provided to recently areas of primary present continue and maintain main amount of the commendation of the event of primary present called another main amounts.

A symbolic on let the theoretical and the estimate and transform the street of the second transfer of the second t

#### d Rostratai

Adequate restraint during flight, emorgancy escape, and crash landing must be provided.

The best, limits, and three such to engineered and rearrance from any momentum which crack input there are recently believed by a crack fight twentying bigh reversionables, vaccinated highly aread limiting, and increasing an execution of the contraction of the contraction of the contraction of the contraction.

Rentarian ment be asimpled: to made in the combined before it desides we teen, tembling, and a makeum that could be important to their the break of them. The many constitutes.

The reviewed spotent wast in capable of integrating rates a "characteristic of integrating rates a "characteristic of the capable of the capa

#### e. Cran Comfact and Efficacing

A communicative and invite maniferent mank to arbitrary for options a spinor in approximate with any and office receive of the structure included the particular enterthine of the structure and the referent of as meny productive enterthinesses on postative, and manifestal restrictions must be impossed by the supplies of them of them on effective or at allowing the structure of t

- March Color Colors marker of the complete complete color in color color color marker of all all all all all in the marker from mights from a for good for all all all all all all all all for all magnetic marker ones become ing the commentative of March Color School and Color market community also make the sold maker of a

Ten Company of money leadered to the


The macapa arasem must be designed to be campionally imaginated and communities with the design of the parent afternation, and must not observedly affect the parents and must not observedly affect the parents of the secretary.

The imagents of the parent average mant and be perclased by the activities of energiesely escape impubilities within the case comparisonal. Example restens sensite requirements and by measurement to provide for granter flexibility of theplays and a catrois location and arrangement, and must alient for political of operation and accommon composite that are compatible with armapain requirements of 1 to 9 percentile crewment. The measurement practicable vision must be mornised for crewment bers.

#### 

The premare cause of ensuremental status of energy systems in current aircraft in the fasture of the crowneather to accust the evenue system in time for executable recovery prior to grand impact. This will become even more circles? for the hazardone highs conditions of fature VTOL and low-citionis days reducing.

Airplane trajectories for maximum hard none-over from him -level flugs. sice shows in Fig. 5 for a -3g victoriums firms at Nisch 9, 9, 1, 9, and 1, 2, and an approximatio capability limit of -1, i.e. at 100 KEAS and -0, ag at 150 KEAS. The libertrains limiting conditions from which encaps might be required for a representative low-addition with respects. The Line count has a line travewe to the time empirical for a crewithmood to seems the among that (6. 19 mercant), decute to escape (1.5 seconds), and orbin's the escape system (6.29 seconds. These times are mand on trained personnel, simple elimine, sample deci los literativos, has coglisto - dilay estributes to mestel durans. Under defined amorganist contributes the best on reactions takes comprehen by the significant country greater. As illustrated, the issue required for human solitons of the excepts system precisives the possibility of ancountry manner for a maximum hald man-over engergency occurring at the prescribed relacio dank consistiff. of transpace agons at 153 feet above the terrain. For some significantly lines nevery for exhibited that wear greates, it is entremely entitled that a commun wealily be consisted of actioning the colonie system in time to effect successibili succep. Examination of the enemys conditions for the VTOL weight (Figs. 4 and it revenies that encope initiation tune by the resticul thinnell and bandons emergencies is also on sensity critical. For emergencies occurring within you feet of the growth, business reactions time mould reseastablly preclude the prompeled try of secremental oricines. At aleghety ingher altitudes exclude mount in Ale de accidentale relatione do excludioused and absolves of colors element e so, instincted wadentrible attibule.

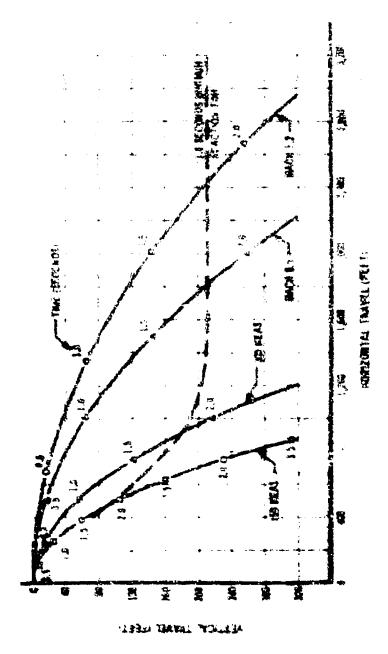

Propert A. Attaches Vinjestertes for Head Parkage, Handare


I consist that is over a now and the constant of the constant

Visitatio commissioned for including communications in all types and bright whole for the after some of provided to maintain all the an air data computer and reduce all modes of the measurement of the artificial borrace, which are remained to the sound for an algebraic color systems. A communication of the angle can be provided for one by the other systems only in algebraic companies of the stable reference. The measurement is achieved by an algebraic combination of the patch angle (can be patch angle (can be patch to the patch angle (can be patch to the patch angle (can be patch to the patch angle of alterial from the article companies.

Principles is, the air date compared requires input and from the print state typic at an importance someon, and the ergic of attack someon. The societies are track attack someon. The societies are tracked attack someon, decimine presenting and indicates as an entering attacked at the companies of the companies of an entering standard air date apparations. This companies in generally are analog maniford-stated and, typically, imprecise outsided entering of hack separate. The air-speed, and air density raths for diagony to the prior or one by other specimes. For the applications outsides the analogue at the prior or one tages of attack, and are density ratio are obtained, a with magniferous errors of all 5 limits, will dagree, and at it, responsibility.

The restar alteracter to a special-purpose rader using fixed astronom to provide a measure of the range to the measure terrain. The simplest and most mont moments rader altitude or paint-type raders. The rader altitude in obtained by measuring the time delay between the truncamented paint, and the paint reflected into the receiving amount by the terrain below the airpiant. At how altitude the nonzerop to a function of the paint width and altitude, being typically 50 et. 31H fort, where H is the altitude to be connected.

Static platforms are generally restricted to mee in arrivance enting a complete weapon delivery system. Matalety sugmentation or invetted savigation systems. The stable reference is obtained by the use of gives and a gindral system. The gyron maintains a vertical reference, and, as the alternal pilebon or rolls, the gindrals make it possible so measures the anogenistic of the excursion about the pileb and roll axes. The accuracy of measuring the juic a angle is typically to within three to five minutes of are.

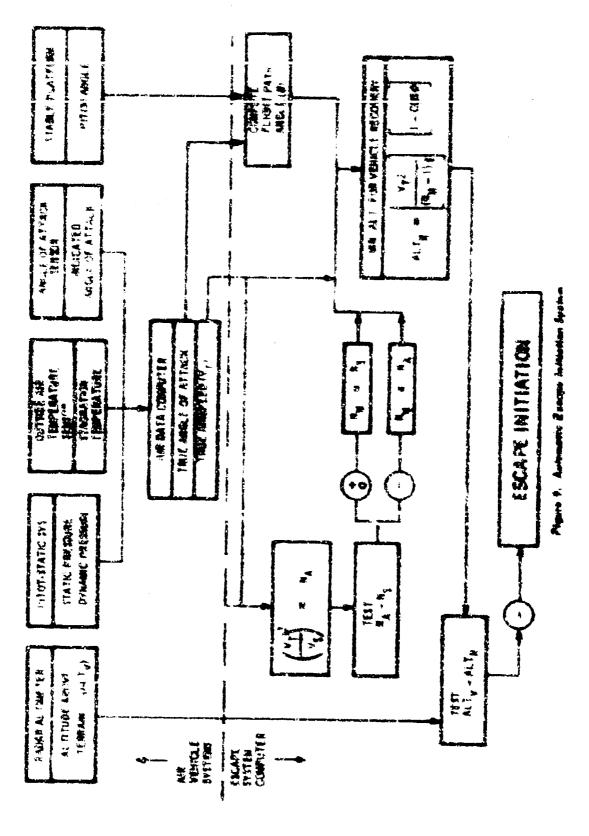

经产工程等 12.1100 16.

### Definition of Terms for Astonistic Lauren Section Commeter-

V<sub>w</sub> Voballe tree kiroperal

You Vindelicias arail securing a lifel femores from a backers

N. Approximation of measuremen positive lead factor coprelitity of evident beam in accordance offic.

Maximum posts we basis kerton republishy of minister bases, so executional limit. The for standy,

 $\sim N_{\rm p} \sim 20~N_{\rm pc}$  whichever is loss, solution by computer.


 Vehicle flaglic path angle, computed from vehicle patch angle and arms angle of attack.

ALTM Mints um cititude above se raio required for refacie recurrent.


ALT, Velocie sitomic stame increix.

· Appeleration and 19 grantly.

Pigeros is and it show the slitting versus sive angle is when on pieacribed and metric eretern would notice envane for vehicle appeals of Mach 1.2 of see level and 300 KEAS. Also planted on the graphy is the sandistrict attitude pended for exceeded recovery of the error with a stability countries around armition. As as apparent from Phore 19, the extonuctic express would have exempt at an altitude mellicant for maximum occase for an except simplest december. st a second of Mach 1.1. Borows. Figure 11 indicates that the presentable andmaktic indication of above would initiate encape at m. of Clark U/A for for endagedful source at the lower speed of the REAL. Theresons, the properties great would not be appropriate for the entire mend range constituend. Additional logic could he programmed into the economic initiation signal to limit the modelle appeal progra during of Joh the automatic secure initiation applies weekly inaction. This wents perveide enterenter except only during the heartstance has altitude high speed daily thight regime. Evaluations of automatic cucage initiation systems which would he appropriate for other May regimes or trons is anterpretate in beyond the scope of this prelicator by increstigation. How over, a secre detailed madrais of the ment for and benefits of enteneatic desection and ourse a millerion in prenegatived in Secretary V.

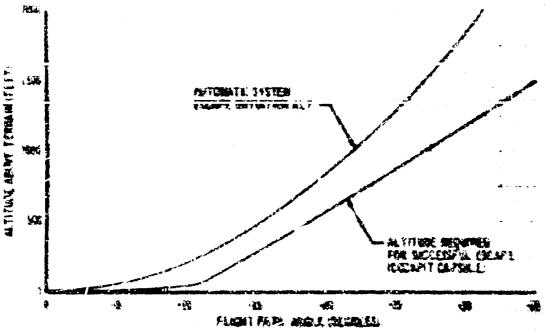

Frysse 16. Austracio Espapo Intelessos Altitudo Validos Augilia Sign Valuado Speed Plant I.2

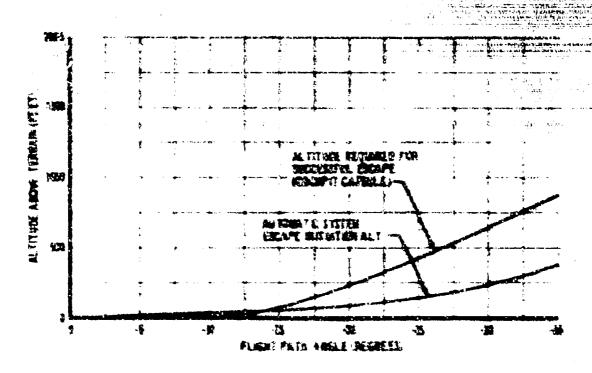

Fagure 11. Austricativ Ecopyi beliticitan differede Fe Sitre Angle for Vehicle Spread 385 KBAS

#### "金额"或工作,从一个"金军"等分别把手手 对现代分解的 经存货的 化二溴苯酚 医淋漓血经致致致

The section discribes estable contributation and reduce configurations, and braic content contributation for 1 PM, and separation data reducted. There types of reducter were consistent to administrative translations. It appetations the altitude data reductes, and it combined expedition reductes having been 275%, and only sold data consistent receives stated from misrours and combinity is defined as the ability of sustained fragts at translation appears 200 ford above the certain. Crea size variations of two literal are been appeared for each volume expension and are consistent to exercise and separation exercise, and separation made copyoness.

Theirs except concept relative combinations, representative of the range of possible cumbinestics of velocity, crem size, and save evacuate, were selected for detailed study. The selected combinations are

h educie	Crew Sare	Except Company
Subsection VIOL	2 - ro.x 5	Open ejerrion seus (UES)
Bubwaic MCCA	2 · man	Pacapatianed ejection seat of LSA
Subonese VTOL	2 - 180年4	Fookpat pust capabile scilles
Substance & Tell	I-mai	Deligner and in an angelence of the party
Supermonto doub	<b>∛—400,0</b>	Open ejection sent
Supersoute duck	4-6340	Encapsulated ejection sent
Supermonic deads	4- MAR	Cordinat ped capenie
Supersonic dusti	1 - <b>20 企业</b>	Separable more capacie
Combined capability	5 <b>~ma</b> .c.	(mez ejectum ten)
Combined cap whitey	2-man	Encaparitated ejection seel
Commissed especially	3-000E	Cecitost pod caposia
Combined esquirility	3m Roman	Superable muse capacite

The most offective escape system for each of the recive supersontative escape concept relate combinations was established. These systems are defined in terms of references and or projections of current systems and preliminary designs of advanced systems. The most mutable relative sets and preliminary designs of advanced systems. The most mutable relative sengue. Substanting preliminar materials and incorporation, compliantly, weight, cost, and developmental status. Preliminary design drawings are presented to them because equipment sustailation requirements and typical circu compartment except equipment. System operation and times suggestive is detimed by subscentic arms logs and written descripts as.

A three-degrees-of-freedom degical computer program was used to optimize escape configuration personents freeds as bount rocked or categorit threat, threat angle, threat escapitation, such literation, development and recovery peractions asset, event frings acquireds, etc.; to give maximum escape capability. The computer program case was used to compute performance of the final secape systems. The program is expected of computing that thesis is and vertical travel and paint retained for escapes will ring any of the escape concepts converted sides on the program inputs motives, second secape to be escape and maximum.

The Residence of the Parket

included and a from mind that we desired from the order to a central a factorial and central and the central and central a

#### I. OPEN EJECTION SEAT CONFIGURATIONS

### 4. Configurations

The open eposion seat a starta configuration for this starty panetase of expering subspaces and three being developed. The system dec tilled as one-extensed a familial configuration and the optimize upon aportion on a system opening ordinal configuration business aportion on a system.

The system was insigned to provide sale accept from zero spend to 600 KEAS at proud irred and up to 50,000 test attrible.

Major subsystems and compositions of the system are: i) canopy/batch jetteom system: 2) instruction and eject supermod instribution; 2) rocket-encapsit (3,500 passed average threat). 6) survival kis. 5) restrains system constitute of implicit, absolute barrane and a ballistic powerus imprise real; 6) directional subsenses; realignment of trajectory (iledit) system; and 7) droppe gas impleyed 3-lock distinctor elabelization decommation parachete and a 29.7-lock distinctor figural recovery parachete. The sense also has seven-type electromechanical actuators for vertical toro and sit, and till adjustication. The sensement here—sould and vertical travel is approximately three and five inches responsively, and the deat can be tilted through a maximum range of ten degrees.

The system is indicated by operation of the arm rest spection control in the In-ring business on the front of the seat backet. After instintion, the sequence of operation to completely automatic, moreover, provintions are made to allow the east acceptant to unastably operation the events assessed and the creation is eclarated the creation to instinct the creation is eclarated by populational and restrained in the seat. After these delays to persuation completion of province events and to provide additional affection of the creationality population of province events and to provide additional affection of the creationality, the catapulation events and to provide additional affection ratio, the DART system supplies have to mittably stabilize the sout. As reclaim barroot the deceleration, stabilization parachets becomes affective and continues to stabilize and deceleration stabilization parachets becomes affective and continues to stabilize and deceleration of the seat. As any any deposition of the measure parachets within minimum of the measure (1916).

Fig. 4000 stante. It was an interestable to define exempt an edge medial become many and the particle of the p


The two weaks allowers, a Tive value is excited account arrangement solvened for this study is observed in a log 18. The registers arrangement will require the all seas to dear the appliance is second reduce ejecting the forward seas. This time regists will be sufficient to ever passed in the regist of the forward seast of the all seast occupant above it arrevest exhibition and passed is account the observed The short supported with a court only if records a suitable is the formant seast register. If records in the all seast returns the first occupant, which is forward in the passed return of the commence sequence content, which is forward to the formand content. The extransion elapsed these from uncape exituation restrictions that commence when the airplane is 1.06 security.

The three-man combined repair ity values meating arrangement as about it hig. 14. The escape system and command sequence for ejection is similar to the necessar arrangement, when the escape as account in material of the pilot's position too at west in ejection followed at it, a second intervals by the supplied and pilot sents. The manufacture of appeals from far the material to clear the arrangement in it. If seconds after my were material to the pilot.

The senting arrangement four the four many supersonal dash subside is secured at the control of the colors of option will automatically open the control of the colors of the copies will automatically and the prior can about to remain with the arrangement. The systems instantially and the prior can about to remain with the arrangement opening issuents instantially and the prior can about to remain with the constraint of the systems instantially and the manage of some and differ only in the constraint opening. The time required for the entire order is until the arrangement of the prior the constraint of opening is a first order of appetitude in the paint and the same after another of appetitude of the control of allowing the appetitude of the real all same factors, either forward and prior inputs the a local-calculate object greature and first and factors, is discussed.

#### b. Performance

The dynamics series than a firm open openit is accurate an among that for each transmit for approximation of the control of 800 KLAS. The conformation trapportunions about in Figures 50, 11 and 15 for the control brown and four man vehicles indicates that after a final level make than according to all fight, at the classes are not food which all creatments in according to the approximation of the firm are for the last many to be upon soft in the ground. The trappositions shown are for the last many to be upon soft in the

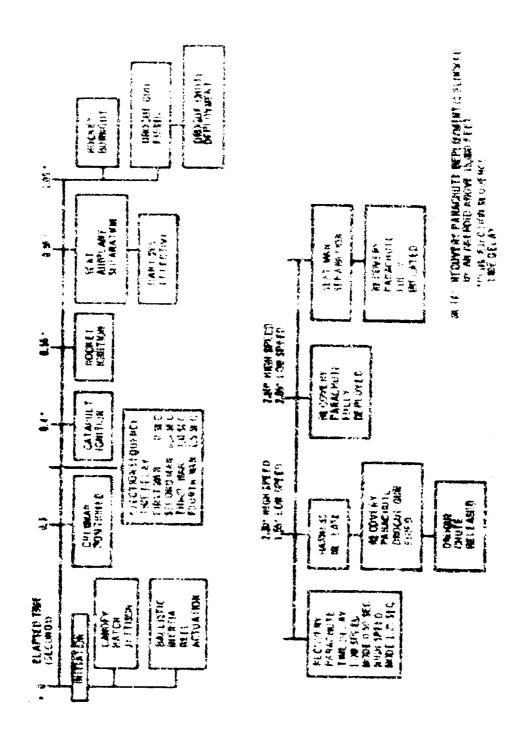

THE PARTY PROPERTY OF THE PROPERTY SEE A PARTY PROPERTY

- EKCTION LINNELOR --

Let mere


AREA PAR

MARKET AL PRESE LAN


Property. For white fusionic VIII. Volich: Open Steems Sport Consignation

大東 報報 必要

机龙 轮

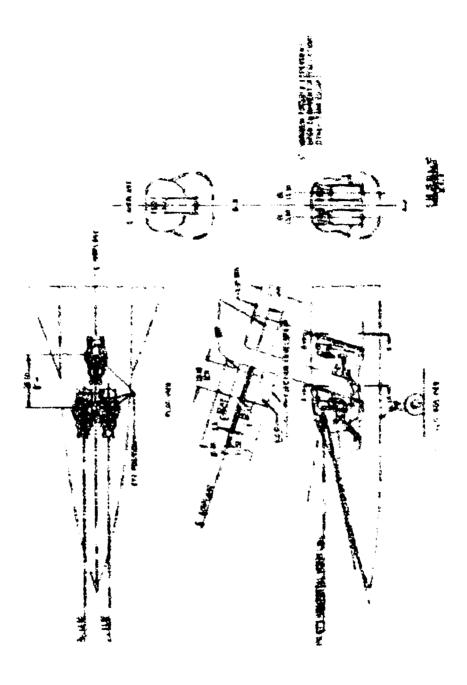

Pipers 16. Three-dus Cambined Capability Vabinio Open Apperlan Saut Canfigureries

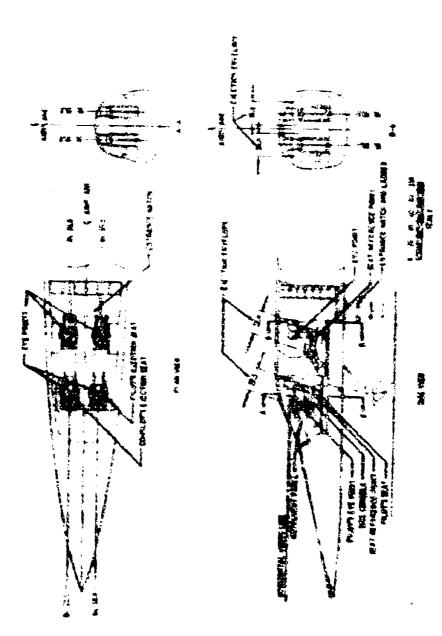

Physics II. Persolitos imperments thesis Validate Open Riverson Sour Configuration




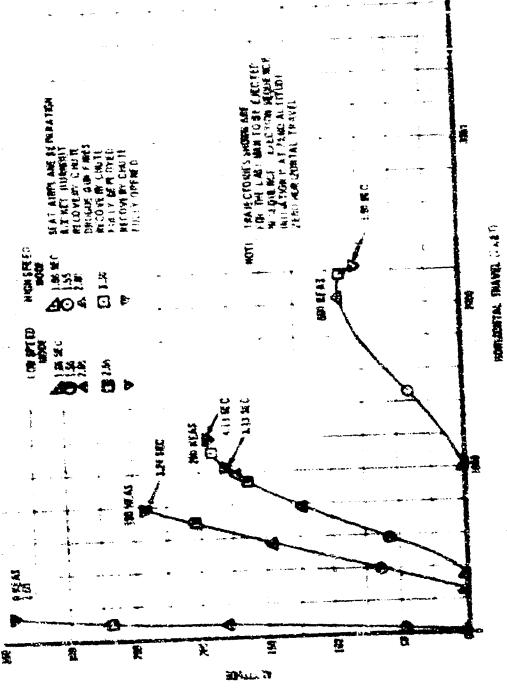


Figure 14. Transfers Walte.e Open Cienters Ann Loval Plighs Trajunferten

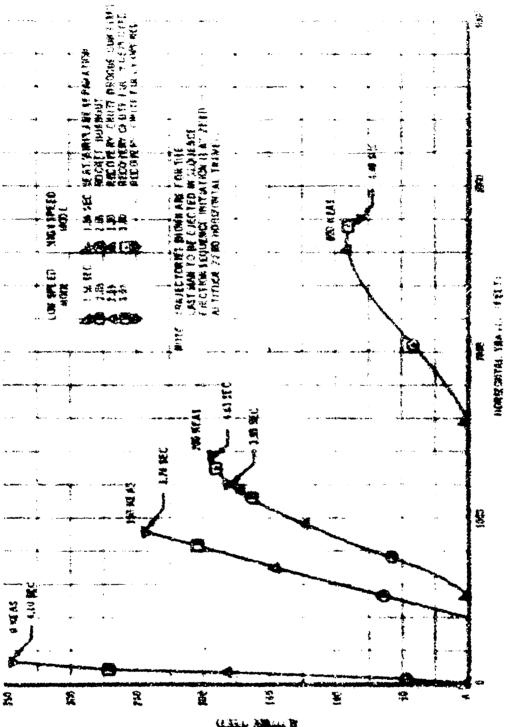



Paper 17. Showship Voltate Open Quarter Seer Level Pilgie Tradeferies

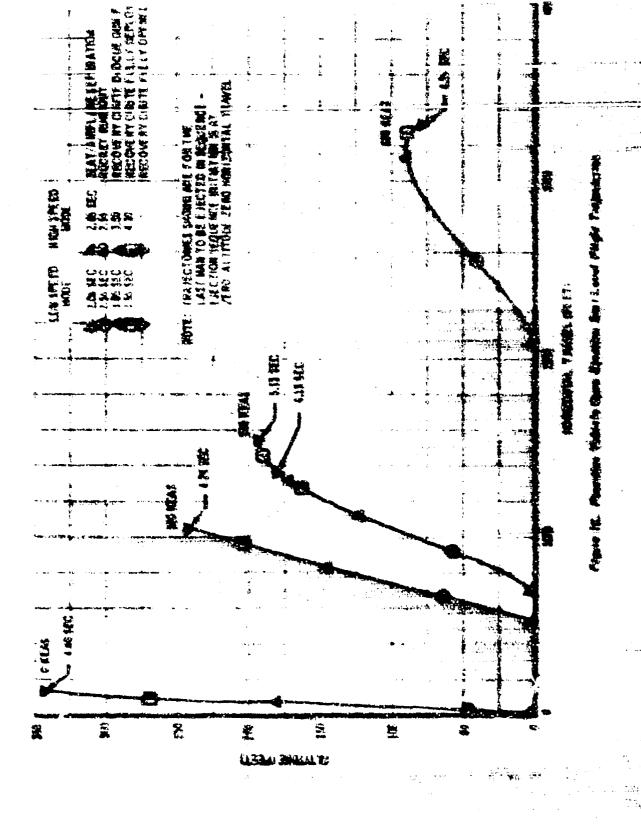

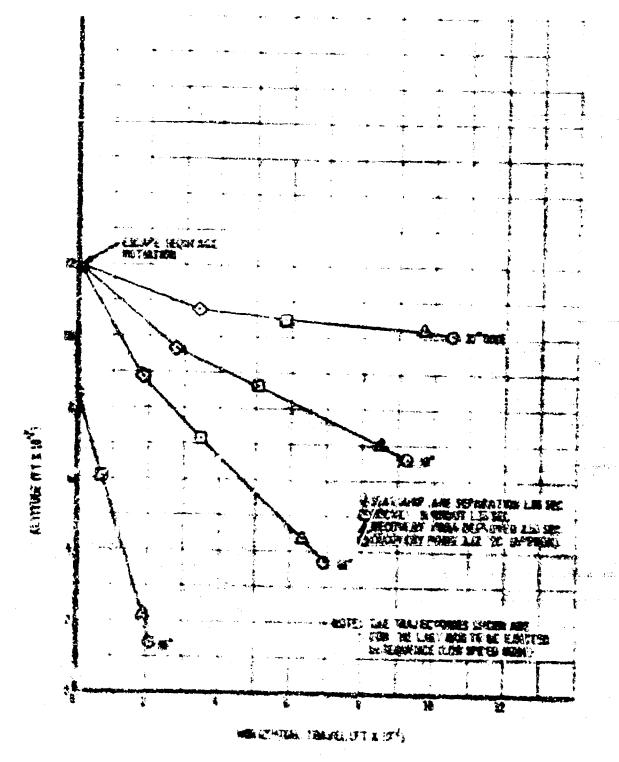


Papers 15, Tomodan: Valencie Open Apartres Sout Bires Tongantaries, 200 Encies



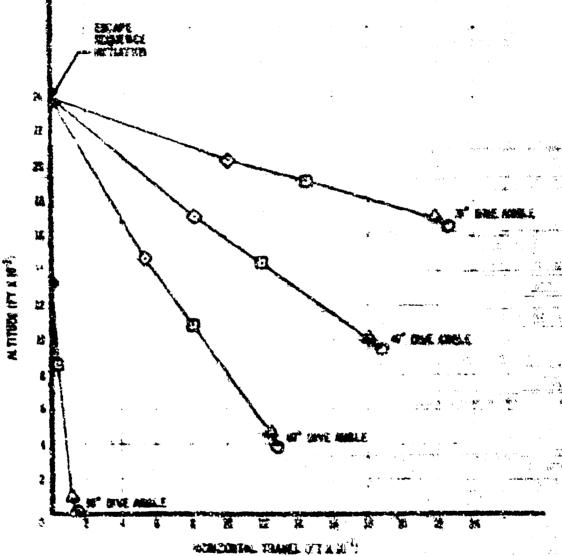

no M. Turadian Waldala Open Sinceion Spry Africa Englactiverus, AM furnit

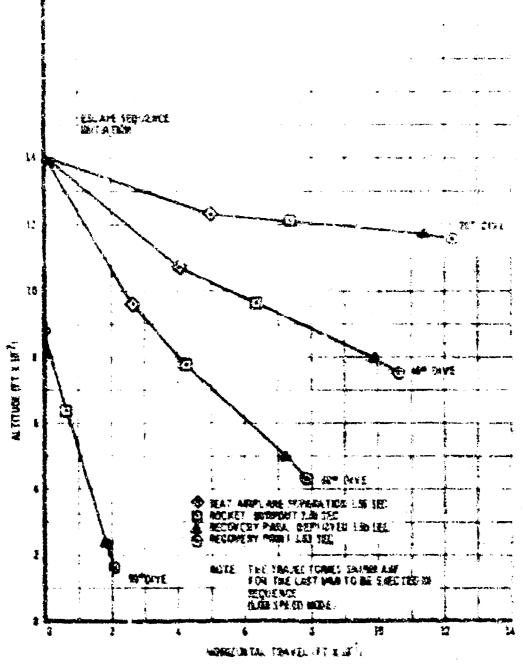

Pigure 25. Thrus-then Medicale Gram Ejections Love Dive Temperatures, 200 Knowle



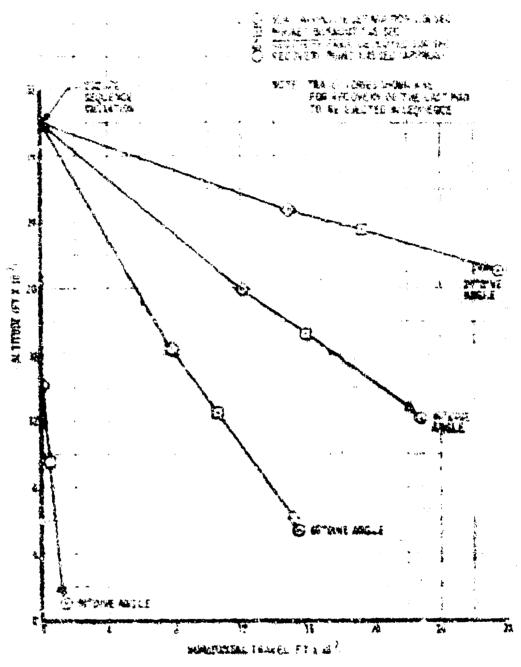


Figure 22. There-ties Versein Unon Kerckien Lear Come Temperatures, 1866 Komes

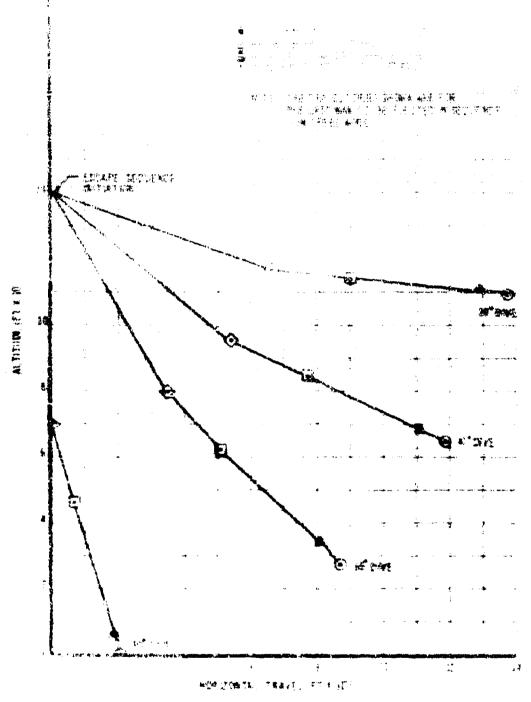


Francis 11 - New Man Francis Come Empress San Drive Transcriptus Mill Ameri

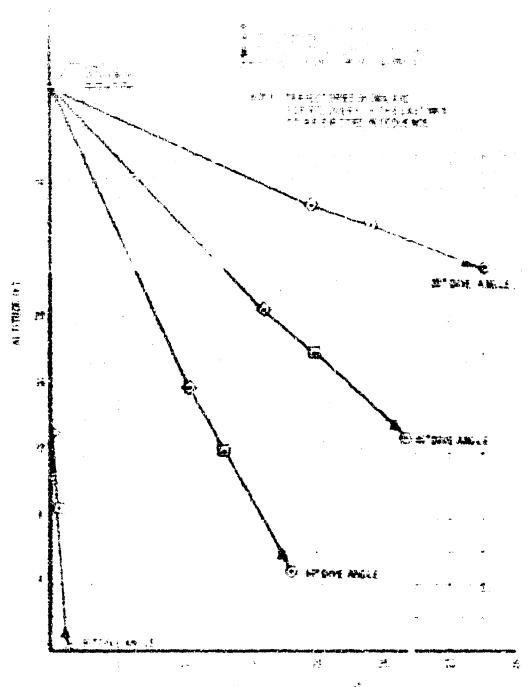

一年 日本の一年の日本の日本の日本


ACTION TO THE STATE OF THE PERSON AS THE PER

49年前3年では、下Marker France Paracelle David Residents Barr Mine Toegockeries 他の Marker

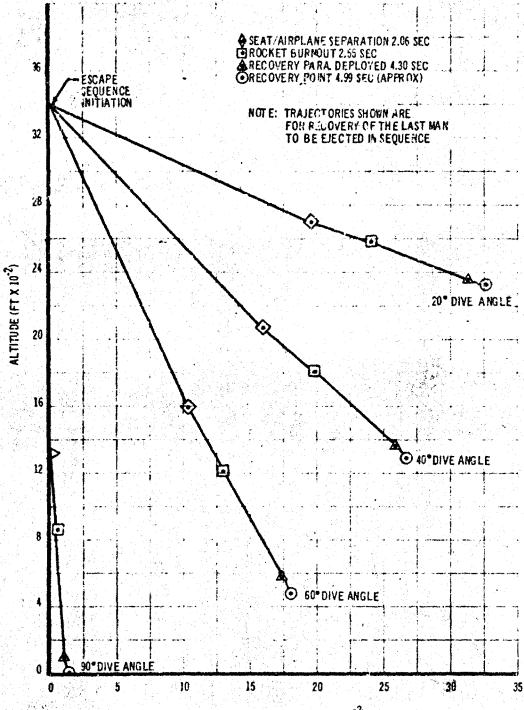

HORIZONTAL TRAVEL (FT X 10<sup>-2</sup>)

Figure 24. Four-Man Vehicle Open Ejection Seat Dive Trajectories, 600 Knots

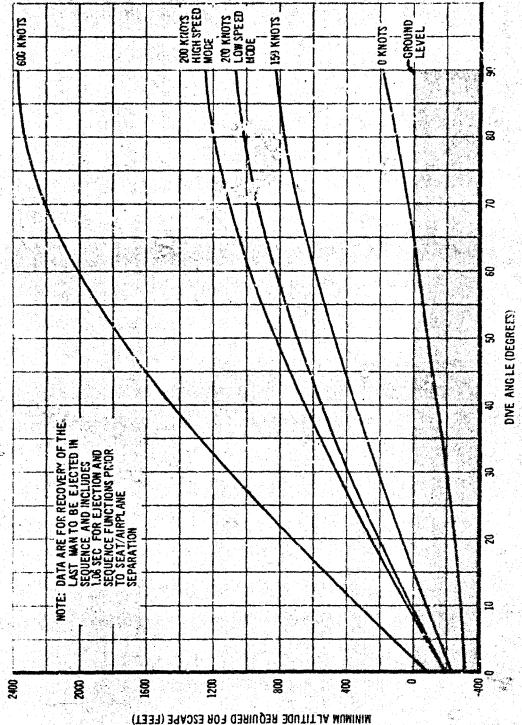

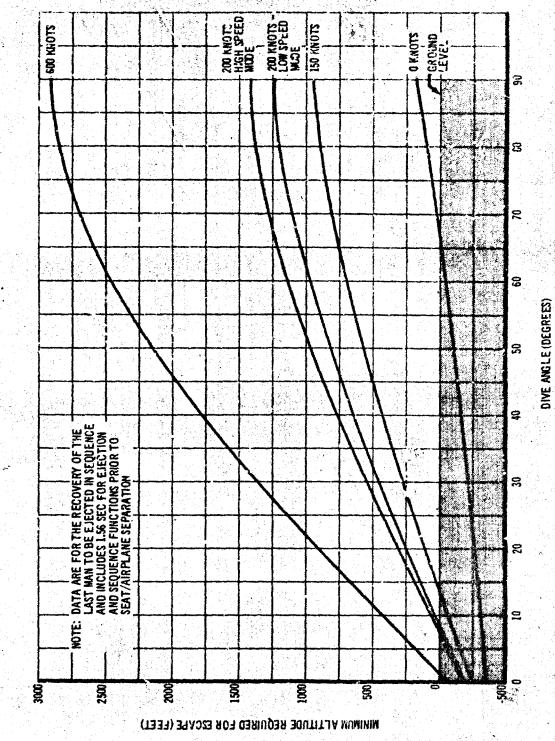


Figure 26. Three-Man Vehicle Open Ejection Seat Escape Altitude Required

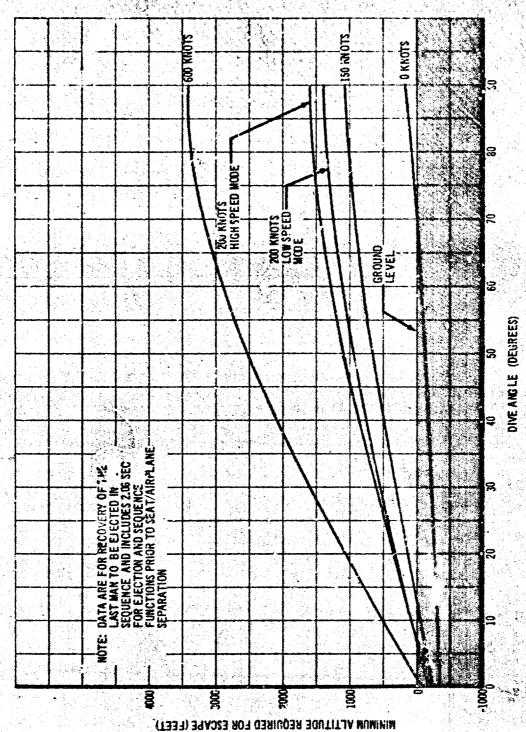


Figure 27. Fourthan Vehicle Open Election Seat Escape Altitude Required

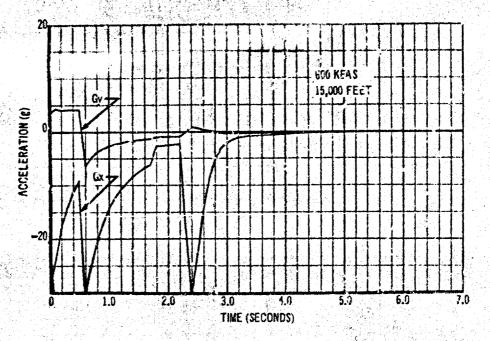


Figure 28. Open Ejection Seat - Computer Plot of Acceleration

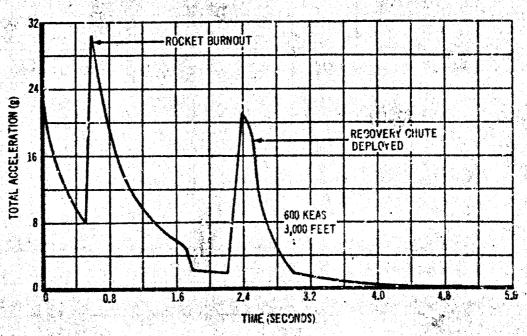


Figure 29. Open Ejection Seat - Acceleration Versus Time

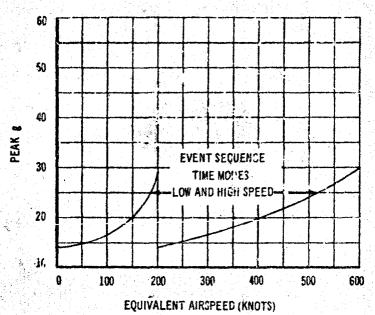


Figure 30. Open Ejection Seat - Peak g

Table 1. Open Ejection Seat Weight Breakdown

	Weight (Pounds)	
	Installed	Ejectable -
Basic seat structure	40.0	40.0
Rocket-catapult	28.0	21.0
Survival kit and equipment	40.0	40.0
Ballistic inertia reel	4.0	4.0
Drogue gun Assembly	2.0	2.0
Stabilization/deceleration parachute	5.0	5.0
Back headrest assembly	16.0	18.0
Skysail parachute and drogue gun	26.0	26.0
Seat adjustment accustors	12.6	12.0
Ejection guide rails and fittings	<b>5</b> . 0	
Emergency oxygen	6.0	6.0
Speed sensor	1.0	
Total Seat Weight	191.0	174.0
Facepe Listch	50.0	
	241.0	
Less Weight of Nonejection Seat	<u>-45.0</u>	
Weight Penalty Per Seat	196.0	
Total Weight Penalty		
2-man vehicle	392.0	
3-man vehicle	588.0	
4-mar vehicie	784.0	

## 2. ENCAPSULATED EXECTION SEAT CONFIGURATIONS

## a. Configurations

The encapsulated ejection seat configurated and analyzed during this study consists of subsystems used in past development programs and those currently in use. The system, as described, is considered the optimum encapsulated ejection seat system, and will have capabilities exceeding those of current systems.

The system was designed to provide safe escape from zero to 800 KEAS from ground level up to 42,000 feet, and to Mach 3.0 from 42,000 to 100,000 feet.

Major subsystems and components of the system are: 1) canopy/hatch jettison system; 2) initiation and ejection sequence installation; 3) restraint system consisting of a lap belt, leg retraction thruster, shoulder harness and powered inertia reel; 4) survival equipment; 5) rocket-catapult (12,000 pound average thrust); 6) drogue gun deployment of 5-foot diameter stabilization/deceleration parachute; 7) drogue gun deployed 36-foot diameter Skysail recovery parachute; 8) stabilization booms and chutes; 9) pressurization system; 10) landing impact system; and 11) flotation system. The seat also is provided with electromechanical actuators for vertical adjustment through five inches. Actuators also are used to position the seat-man forward of the capsule shell (in one capsule version) during flight which may be desirable for some airplane crew arrangements. However, the dynamic performance and safe escape capability for each encapsulated seat design are identical.

Operation of either handgrip located on the seat arm rests retracts the crewman's legs (seat-man if required), closes the clam shell doors, and pressurizes the capsule. From this position, the pilot can monitor the instrument panel and control the airplane or initiate ejection by squeezing the trigger in either handgrip. When the ejection system is initiated, the canopy/ hatch is jettisoned and the crewman is positioned and restrained in the sert. Just before capsule separation from the rails, the stabilization/deceleration parachute is deployed (reefed) and the catapult rocket motor is ignited. Immediately after separation, the stabilization booms are extended to stabilize the capsule. At rocket burnout, the stabilization/deceleration parachute is disreefed and continues to stabilize and decelerate the capsule to allow deployment of the recovery parachute within the minimum elapsed time. The recovery parachute deployment time delay is established by a speed sensor operated by the airplane pitot-static system when the escape system is initiated. The system event sequence operates a low-speed (below 300 KEAS) or a high-speed (above 300 KEAS) mode, as shown in Fig. 31, for ejections below 15,000 feet. If escape occurr at high altitude, the capsule is stabilized and descends to 15,000 feet before deployment of the main recovery parachute.

The escape system incorporates a command-select sequencing system that permits the pilot or copilot to eject the entire crew at prodetermined intervals. The following events require 1.65 seconds after system initiation:

1) retract legs and/or seat-man; 2) close doors; 3) pressurize capsule;
1) jettison canopy/hatch; 5) position and restrain crewman; and 6) propel capsule up the rails. In multiplace airplanes, pre-ejection events are concurrent, and time delays are provided for ejection of the crewmembers in a pre-determined sequence. This will permit all crewmembers to clear the airplane within the minimum elapsed time.

The two-man subsonic airplane tandem seating arrangement is shown in Figs. 32 and 33. The capsule in Fig. 33 positions the seat forward of the capsule shell during normal flight and retructs the seat-man when the escape system is initiated. If escape is initiated by the forward seat control, the aft seat ejects 0.5 second prior to the forward seat to avoid collision and possible parachute entanglement. The forward seat occupant has the option of being ejected if escape is initiated by the aft seat control, or to remain with the airplane depending or the position of the command sequence control. The minimum elapsed time from escape initiation until both crewmen plear the airplane will be 2.15 seconds.

The three-man combined capability vehicle crew arrangement is shown in Fig. 34. The escape system and command sequence for ejection will be similar to the two-man vehicle. When escape is initiated by the pilot, the order of ejection is the aft seat followed at 0.5 second intervals by the copilot and pilot seats. The minimum elapsed time from escape initiation until the entire crew clears the airplane is 2.65 seconds.

The crew arrangement for the four-man supersonic dash vehicle is shown in Fig. 35. In this crew arrangement, escape initiation by either of the forward seats automatically ejects the entire crew. However, either aft seat can eject individually and the pilot can elect to remain with the airplane. The systems function as described above and differ only in the command ejection control. The time required to eject the entire crew after escape initiation is 3.15 seconds. The order of ejection is the seat aft of the copilot, the seat aft of the pilot, the copilot and pilot seats. By allowing the aft capsules to be ejected prior to the forward capsules the possibility of collision and parachute entanglement is reduced without increasing the minimum elapsed time required.

## 5. Performance

The dynamic performance of the encapsulated ejection sea's was analyzed on the computer for speecs from zero to 806 KEAS. Figures 36, 37, and 38 show the level flight ejection trajectories and indicate that for level flight ground level ejections throughout the speed range considered for each vehicle, the capsule will be recovered well above the ground. The trajectories shown for 6 ch vehicle are for the last man to be ejected in the command sequence and include the time spent in the aircraft prior to scat/airplane separation for pre-separation functions and ejection sequence time delays.

Escape sequence is initiated at the origin of the graphs and the time lapse from initiation until the last man clears the all applicate 2.15 seconds for the two-man vehicle, 2.65 seconds for the three-man vehicle, and 2.15, becomes for the four-man vehicle.

Figures 39 and 40 show capsule trajectories for escape during diving flight at 200 and 600 KEAS for the two-man vehicle. Figures 41 and 42 show the dive trajectories at 200 and 800 knots for the three-man vehicle and Figs. 43 and 44 show the dive trajectories at 200 and 800 knots for the four-man vehicle. These data are also for the last man to be ejected in the command sequent and include the time required for pre-separation functions and ejection sequence time delays.

Figures 45, 46, and 47 show, for each vehicle, the altitude at which escape must be initiated for successful recovery of the entire crew versus airplane dive angle for various airspeeds.

A computer plot of the horizontal and vertical accelerations that will be imposed a the crewman during escape at a speed of 800 KEAS at 15,000 feet are shown in Fig. 48. Figure 49 shows the total deceleration load experienced by the crewman during escape at 800 KEAS at a lower altitude. Due to the more rapid velocity decay caused by the deceleration parachute prior to recovery parachute deployment at lower altitudes, the deceleration loads are less than those at 15,000 feet. The maximum peak g calculated for escapes from zero to 800 KEAS for both the highinid low-speed event sequence modes are shown in Fig. 50. The rocket motor, the celeration parachute and the event time sequence were designed to keep the acceleration loads on the crewman within the accepted human tolerance limits thering ejections from zero to 800 KEAS.


## c. Weight Penalty

Table II shows the weight breakdown for the encapsular dejection seat. Weight penalties shown for the two-man, there must suit four-man vehicles include weights of the sunt installation and excapt the penaltic seats.

Table II. Encapsulated Seat Weight Breakdown

	Ejectable (Pounds)	Nonejectable (Founds)
Capsule structure	200.0	
Seat including restraint		
Seat actuators	20.0	
Rocket-catapult	36.0	
Survival gear	45.0	
Oxygen system	27.0	
Stabilization booms and	80.0	
Stabilization/deceleration parachute	20.0	
Recovery paracoute system	45.0	
Impact bag and gas generator	15.0	
Fiotation system	10.0	
Speed sensor		1.0
Catapult outer tube		15.0
Ejection rails and fittings		40.0
Ejectable	558.0	
* Nonejectable		56.0
Total Scat Weight	614.0	
Escape Hatch Weight	<u>50.0</u>	
	664.0	
Less Weight of Nonejection seat	<u>-45.0</u>	
Weight Penalty Per Seat	619.0	
Total Weight Penalty		
2-man vehicle	1238.0	
3-man vchicle	1857.0	
4-man vehicle	2476.0	

ないという 東京 東京の東京の東京の東京の大学

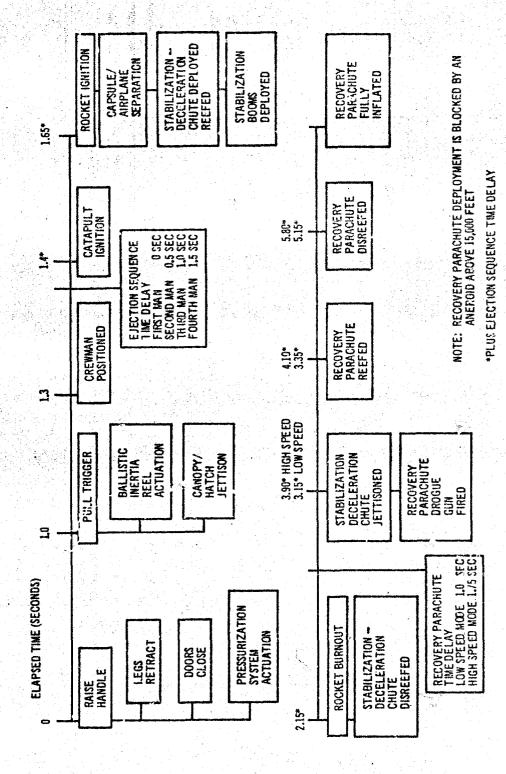

The state of the s

Figure 31. Block Diagram - Encapsulated Section Stat Event Sequence


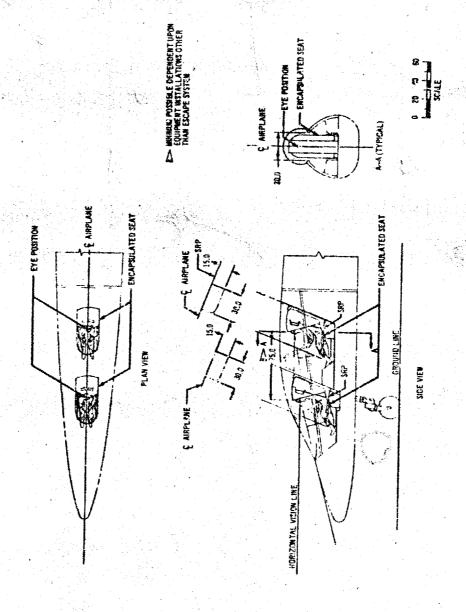


Figure 32. Two-Man Subsonic VTOL Vahicle Encapsulated Ejection Sent Configuration

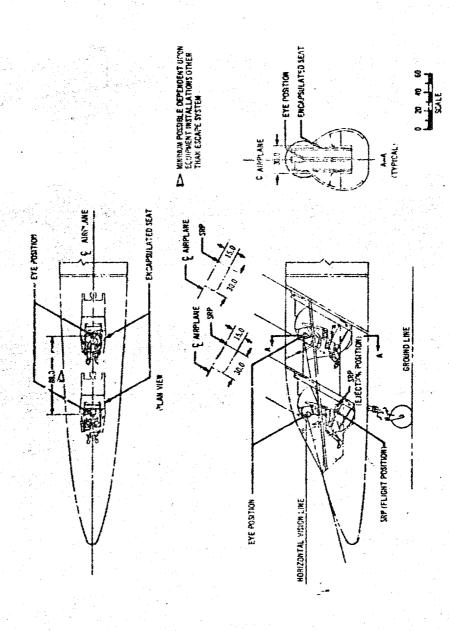

い、はなられ、大きな神経のでは、大きなななないないないないのである。これにいることなったとなっていませんが、これがないないないないないないないないできない。とうことものに

Figure 32. Two-Man Subsonic VTOL Vehicle Encapsulated Ejection Seat Configuration (Seat Positioning Type)

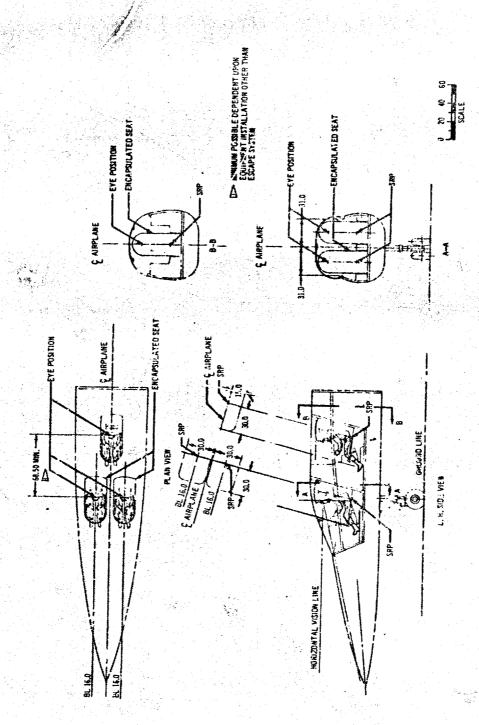


Figure 34. Three-Mon Combined Capability Vehicle Encapsulated Ejection Seat Configuration


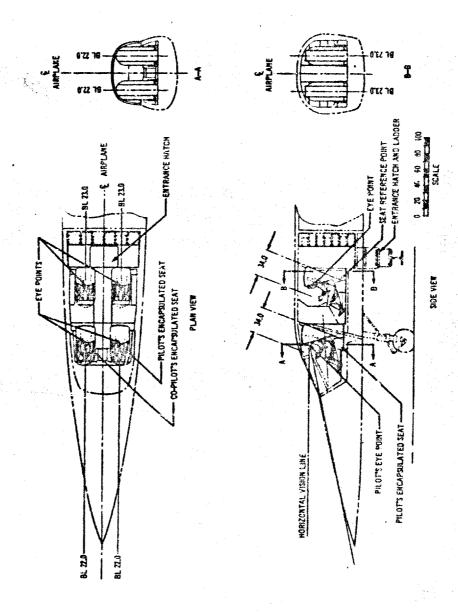


Figure 35. Four-Man Supersonic Dash Vehicle Encapsulated Ejection Seat Configuration

HORIZONTAL TRAVEL (FT x 10-2)
Figure 36. Two-Man Vehicle Encapsulated Ejection Scat Level Flight Trajectories

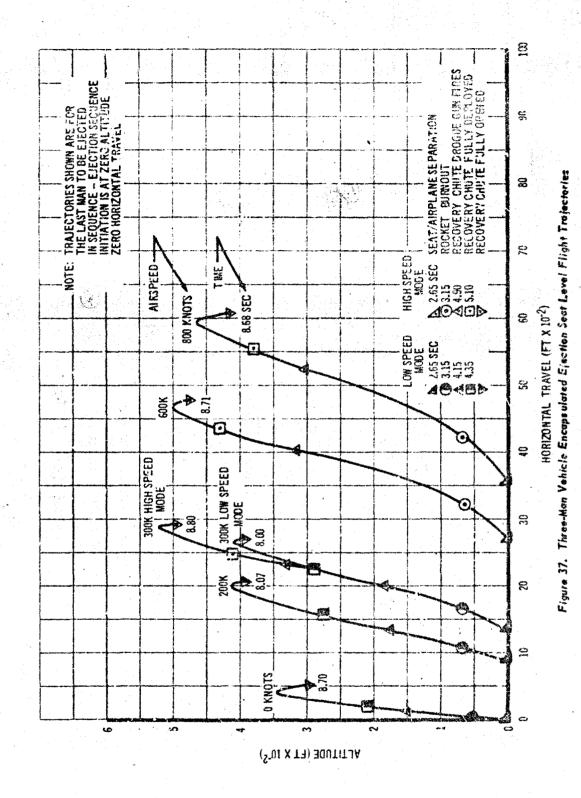

をおけるないとなった。

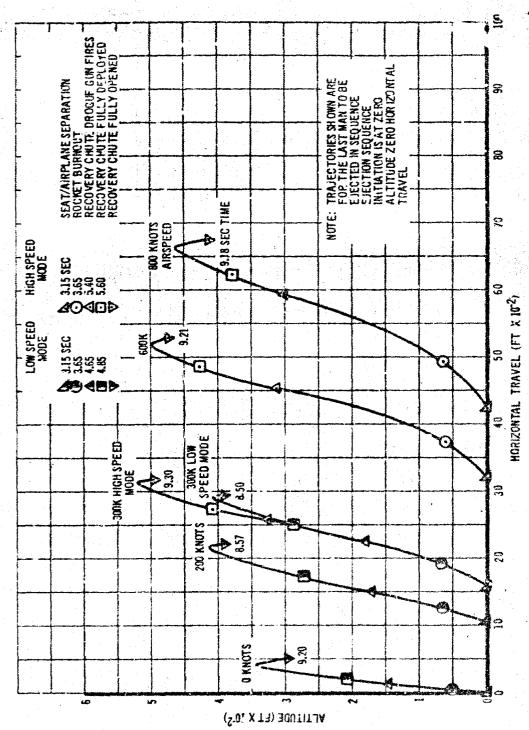


Figure 38. Feer-Mon Vehicle Encapsulated Ejection Seet Level Flight Trajectories

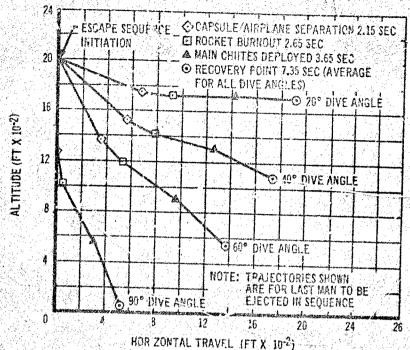


Figure 39. Two-Man Valicie Encapsulated Ejection Seat Dive Trajectories, 200 Knots

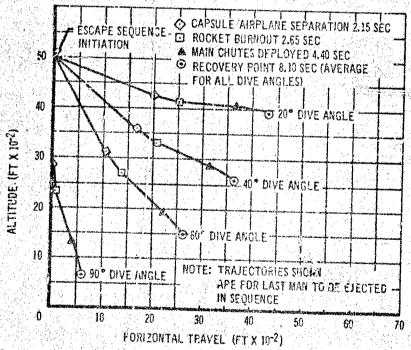


Figure 40. Two-Man Vehicle Encansulated Ejection Seat Dive Trajectories, 600 Knots

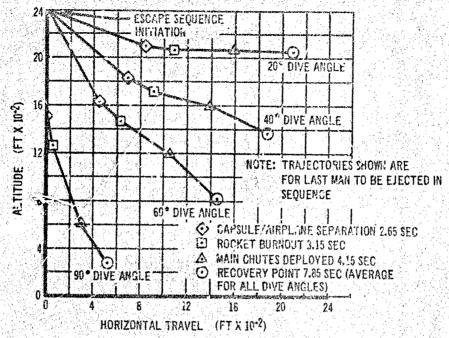


Figure 41. Three-Man Vehicle Encapsulated Ejection Seat Dive Trajectories, 200 Knots

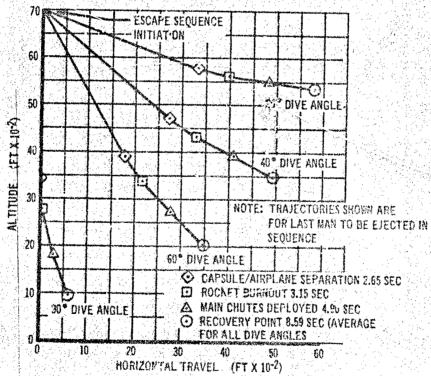


Figure 42. Three-Han Vehicle Encopsulated Ejection Stat Dive Trajectories, 800 Knots

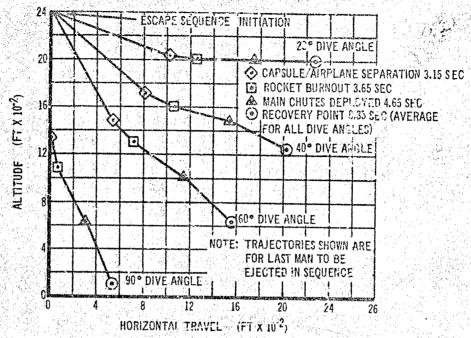


Figure 43. Four-man Vehicle Encopsulated Ejection Seat Dive Trajectories, 200 Knots

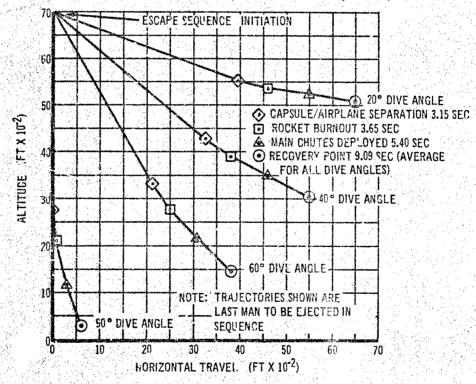


Figure 44. Four-Man Vehicle Encapsulated Sjection Seat Dive Trajectories, 800 Knots

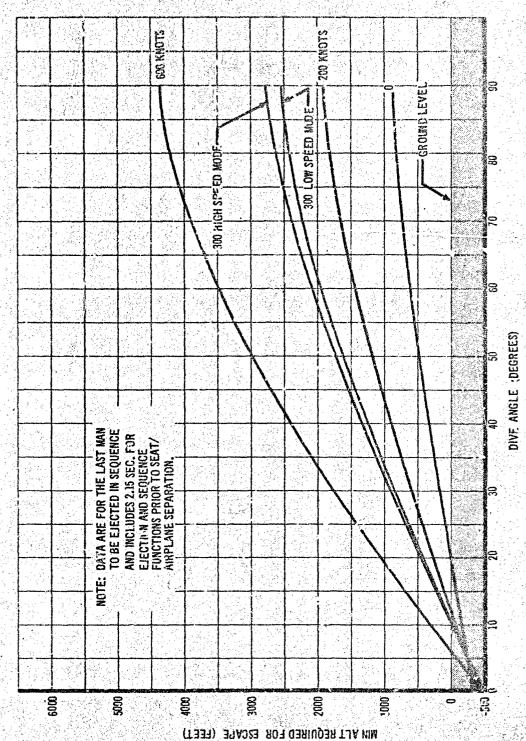


Figure .5. Two-Man Vehicle Encapsulated Ejection Saat Escape Allitude Required

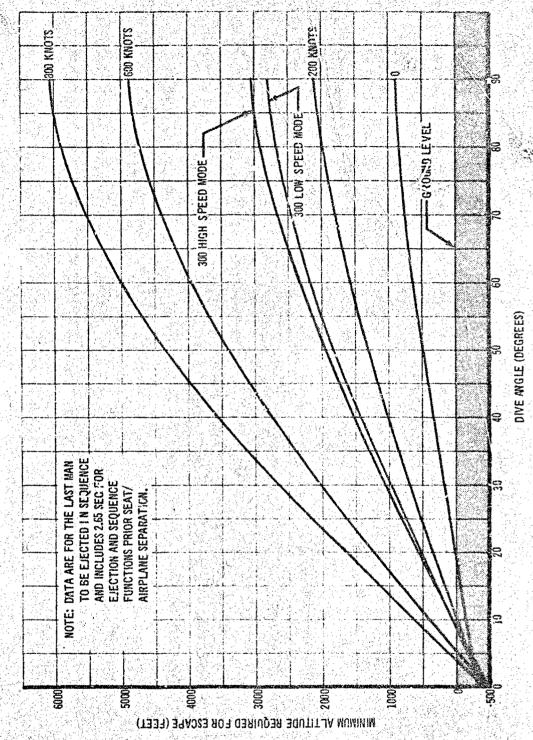


Figure 46. Three-Man Vehicle Encapsulated Ejection Seat Escape Altitude Required

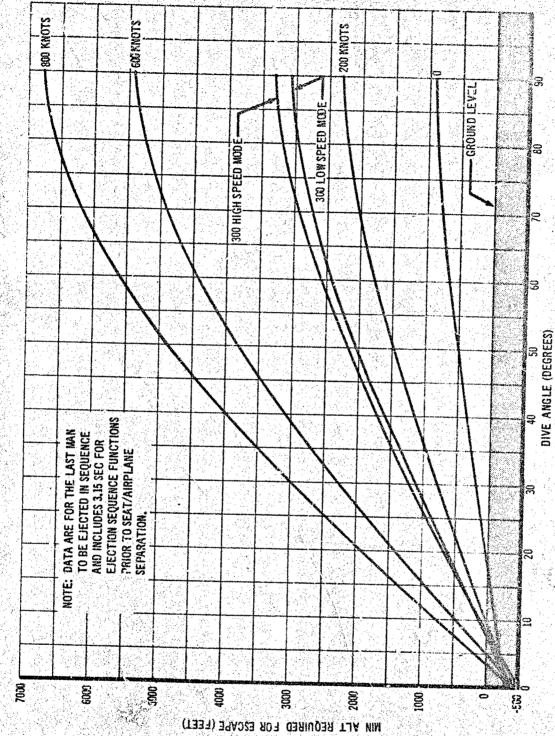


Figure 47. Four-Man Vahicle Encapsulated Ejection Seat Escape Altitude Reguired

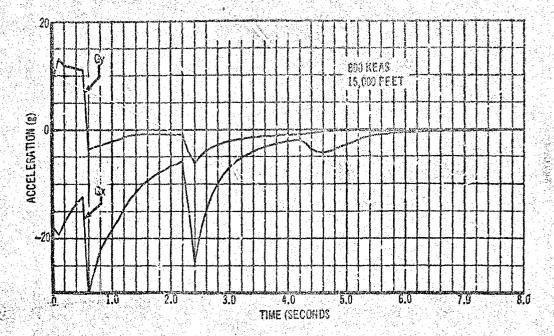


Figure 48. Encapsulated Seat - Computer Plat of Acceleration


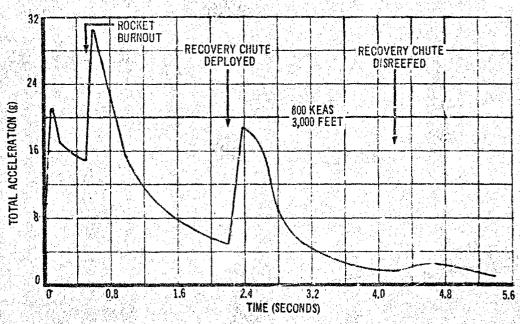


Figure 49. Encapsulated Ejection Seat - Acceleration

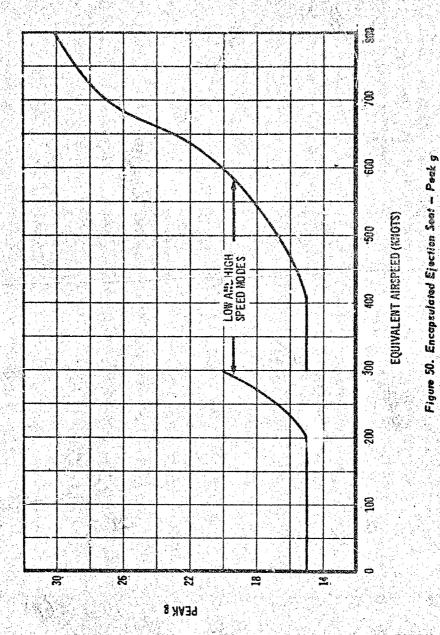

### 3. COCKPIT POD CAPSULE CONFIGURATIONS

#### a. Configurations

This section describes preliminary design configurations of cockpit pod capsule escape systems for the two-man subsonic VTOL vehicle, four-man supersonic dash vehicle, and the three-man combined capability vehicle. The escape systems were designed to provide safe escape at zero-speed, zero-altitude and throughout the performance envelopes.

The cockpit pod capsule (CPC) concepts for the two-, three-, and four-man configurations are shown in Figs. 51, 52 and 53. The heavy solid lines in both the plan and side views trace the outline of the CPC after separation. The drawings also show the location and approximate sizes of the subsystems required for escape.

Upon escape initiation, the crew compartment is separated from the rest of the airplane by linear shaped charges. Two stabilization parachute booms are extended and a stabilization parachute is deployed from each. The escape boost rocket then propels the capsule up and away from the rest of the airplane.

As soon as the capsule has decelerated to a dynamic pressure corresponding to safe structural loads of the parachutes, they are deployed. The time required for capsule deceleration is a function of the dynamic pressure at the time of escape initiation. To provide optimum escape performance at low and high speeds, a two-mode timing sequence is employed. At speeds above 350 KEAS, the high-speed mode is used; below 350 KEAS the low-speed mode is used. The escape timing sequences for both modes are shown in Figs. 54, 55 and 56.

Table III lists capsule design data with escape subsystem sizes and weights. Subsystems related to escape activity are described in more detail in Section III.5.

### b. Performance

Capsule recovery alt ude — that is, the aircraft altitude required for the main parachute to fully open — is a function of timing sequence, stabilization of capsule in a positive lift attitude, rocket thrust, burntime, rocket nozzle angle, and location of thrust line below the capsule center of gravity.

During level flight at ground level, all three cockpit pod capsules were computed to fully recover at any velocity within their speed range. This is shown in Figs. 57, 58 and 59. Figures 60 through 65 show capsule escape trajectories at both 200 KEAS and maximum airplane speeds during diving flight. Overall capsule performance with respect to the minimum altitude required for successful escape for various velocities and dive angles is shown in Figs. 66, 67 and 68. These plots include a time delay of 0.2 second from escape initiation to capsule separation. The notations of the high-speed and low-speed modes refer to the two-mode timing sequence shown in Figs. 54, 55 and 56. Figures 69, 70 and 71 show the maximum peak capsule accelerations experienced during escape versus equivalent airspeed at the time of escape initiation. Accelerations versus time for the maximum speed conditions at 15,000 feet in the X and Y directions

are shown on computer plots in Figs. 72, 78 and 74. Figures 75, 76 and 77 show the resultant g for the same conditions.

All data shown include a 0.2-second time delay from escape initiazion to capsule separation. No time is included for detection, decision making, or control actuation required by the crew.

Table III. Cockpit Pod Copsule Design Data

The state of the s	De magnetier d'une carrier au train ent au me accusé n	cidellosmascrote a produser appletonum errorena. el	THE RESERVE OF THE PROPERTY OF THE PARTY OF	MAN CONTRACTOR
		Vehicle		
<u>Cepsule</u>		Two Man	Three Man	Four Man
		0 000 0	6 800 0	9,000.0
Weight (total ejectable)	Lb	3,600.0 14.0	6,500.0 16.0	21.6
Length, overall	Ft Ft <sup>2</sup>	$\frac{14.0}{22.0}$	40.0	63.0
Ref. area Pitch inertia	Lb-Sec <sup>2</sup> -Ft	2,000.0	4,000.0	€ 120.0
Separation System				
Weight of FLSC (flexible				
linear shaped charge)	Ib	26.0	26.0	26.0
Weight of initiating system				
plus Function Fittings	Lb	12.6	12.6	12.6
Boost Rocket				
Thrust	Lb	43.700.0	110,000.0	171,000.0
Burntime	Seç	0.6	0.6	0.6
Volume	$In^3$	4,300.0		19,500.0
Nozzle angle	Deg	34.2	23.6	20.9
Weight	Lb	180.C	460.0	720.0
Thrust/CG Misalignment	Ft	0.5	1.0	1.0
Stabilization Booms (2)	per vehicle)			
No. of tubes		3.0	3.0	3.0
Boom length stored	Ft	3.8	4.5	5.0
Boom length extended	Ft	10.2	12.0	13.0
Storage tube OD	In	14.9	17.4	29.7
Weight (total)	Lb	1,000.0	1,500.0	1,800.0
(not including weight of br and parachute)	udie			
Stabilization Parachutés (2	per vehicle)			
Reefed diameter	Ft	8.5	5,4	6.8
Flat diameter	Pt.	10.0	11.0	12.6
Stowed vol (total)	In <sup>3</sup>	1,000.0		6,000.0
Weight (total)	Lb	(0.0	70.0	110.0

Table III. (Continued)

	and Antonio Comments and Control of the Control of		Vehicle	
		Two Man	Three Man	Four Man
Recovery Parachutes				
No. of parachutes Reefed diameter	Fŧ	1.0 12.9		3.9
Flat diameter	<b>Pt</b>	71.0		11.9 69.0
Stowed vol (total)	$In^3$	8,000.0		22,500.0
Weight (total)	Lb	110.0	210.0	290.0
			210.0	2.50.0
Impact Attenuation S	<u>vstem</u>			
Bag weight	Lb	32.0	45.0	57.0
Inflated vol	Ft <sup>3</sup>	66.0	123.0	167.0
Stowed vol	$\ln^3$	2,700.0	3,700.0	4,600.0
Pressure bottle vol	$ m In^3$	650.0	1,150.0	1,600.0
Inflation assy weight	Lb	26.0	39.0	51.0
Flotation System				
Bag dia spherical, (4 ea)	Ft	3.0	3.7	4.1
Bag wt (total)	Lh	17.0		46.0
Irflation bottle vol	$\ln^3$	650.0		1,880.0
Bottle, gas & valve wt Self righting bag (1 ea)	Lb	22.2	41.0	51.5
(Same dia as flot bag) Bag wt	Lb		0 #	
Inflation bottle vol	In <sup>3</sup>	4.3 190.0	8,5 360.0	11.5
Bottle, gas and valve wt	Tb .	7.2	12.5	470.0
			1.4.0	15.5
Weight Summary (Lb	<u>s)</u>			
Separation system	基础的影響	38.6	38.6	38.8
Nose radome thrusters		0.0	0.0	13.0
Boost rocket		180.0	460.0	720.0
Stabilization beoms		1,000.0	1,500.0	1,800.0
Stabilization parachutes		40.0	70.0	110.0
Recovery parachutes		110.0	210.0	290.0
Impact affermation system		58.0	84.0	108.0
Flotation system		60.7	96.0	124.5
Rocket support structure		30.0	78.0	120.0
Stabilization boom attachm	4, 2, 3, 3, 4, 4, 4, 4, 4, 4, 4, 4, 4, 4, 4, 4, 4,	61.0	02.0	110.0
Recovery parachute attach	ment	20.0	30.0	40.0
Survival equipment		100.0	150.0	200,0
TOTAL (Penalty)		1,589.3	2,808.6	8,874.1

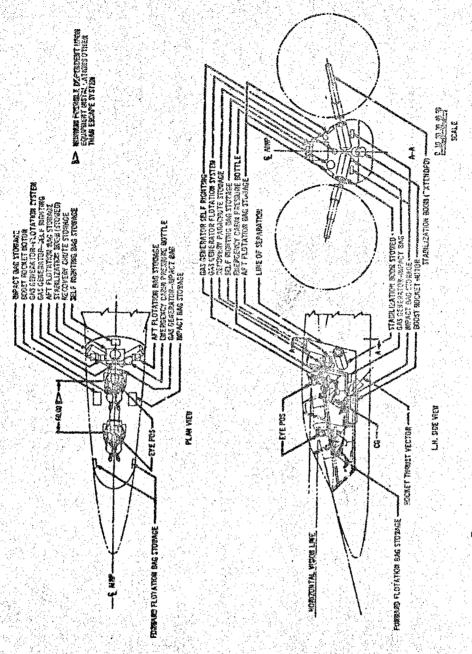
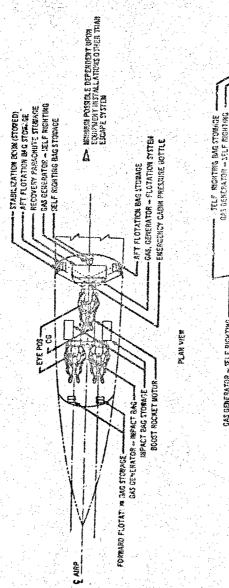


Figure 51. Two-Man Subsonic YTOL Vehi-In Cockpit Pad Capsula Configuration



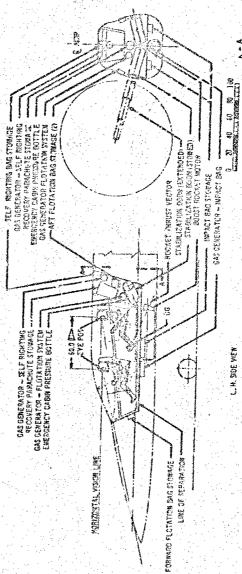


Figure 52. Three-Mar Combined Capability Valicie Costors Pod Capaule Configuration

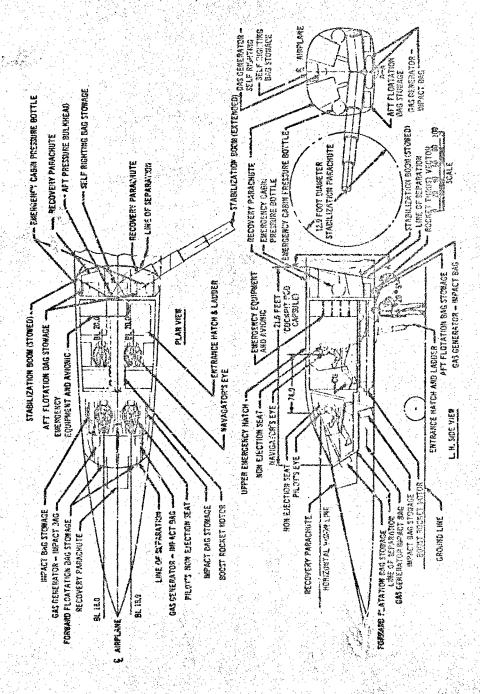


Figure 51. Four-Man Supersonic Dash Vehicle Cockpit Ped Copsule Configuration

Figure 54. Block Diagram - Escape Events Two-Man Cockpit Pod Capsule

La de la companya de

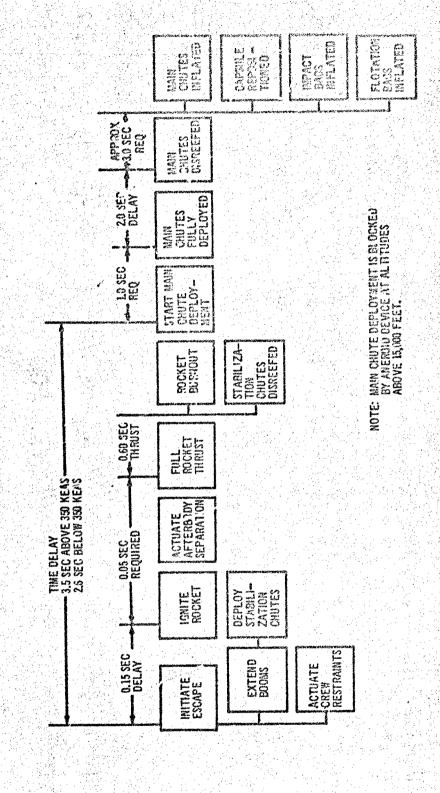


Figure 55. Block Diagram - Escrys Events Thres-Man Cockpit Pod Capsulo

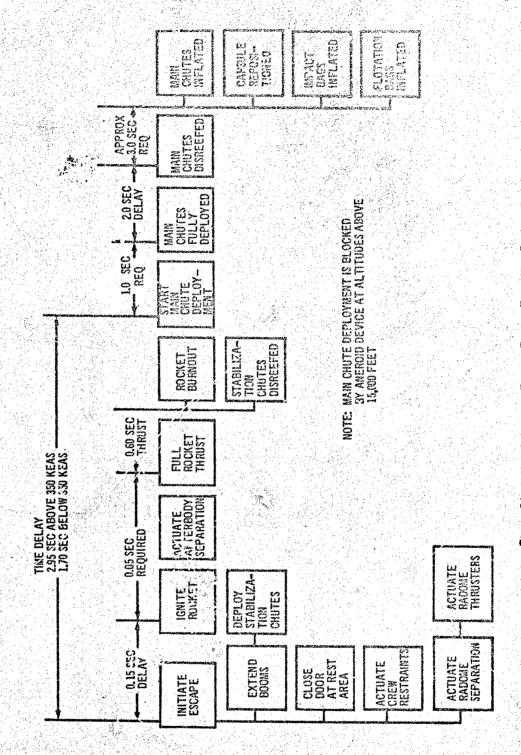


Figure 56. Block Diagram - Escape Events Four-Mar Cockpit Pod Capsula

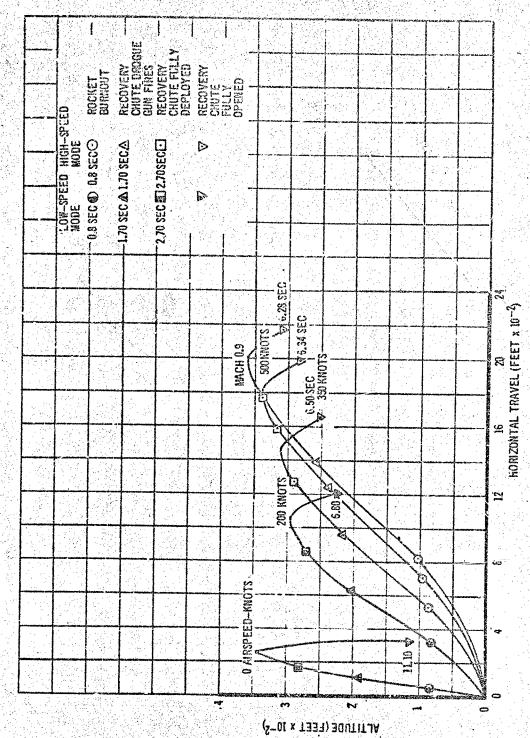


Figure 57. Two-Man Cackpit Pod Capsule Level Filght Trajectories

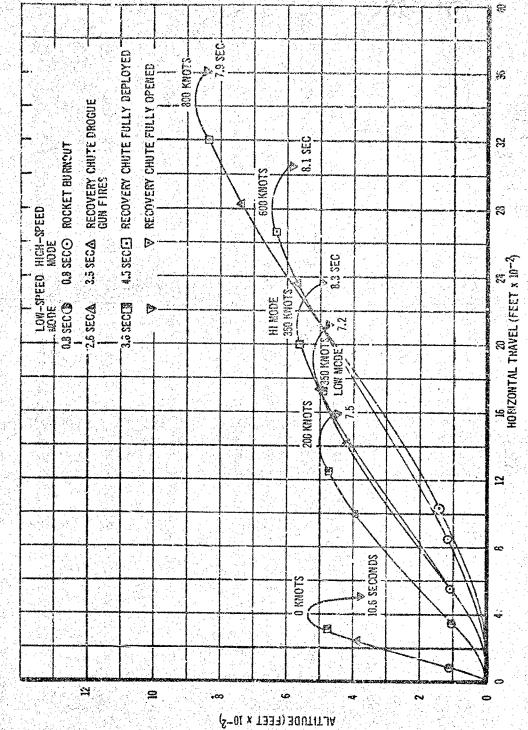


Figure 58. Three-Man Cockpit Pod Capsule Level Flight Trajectories

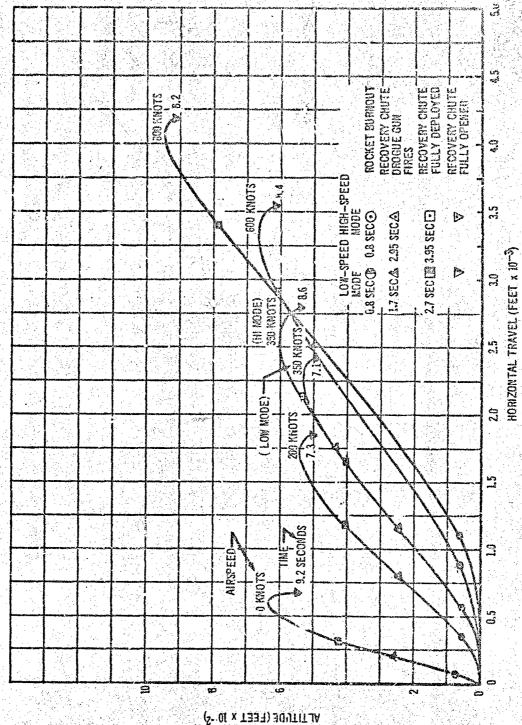


Figure 59. Four-than Cockpit Pod Capsula Level Flight Trajectories

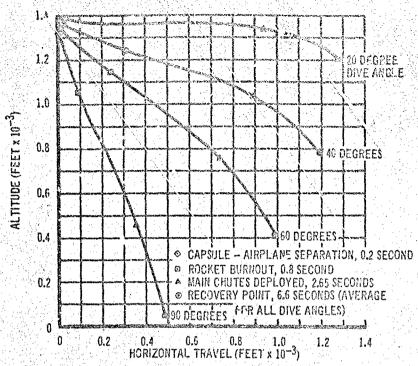


Figure 60. Two-Man Cockpit Pod Capsule Dive Trajectories, 200 Knots

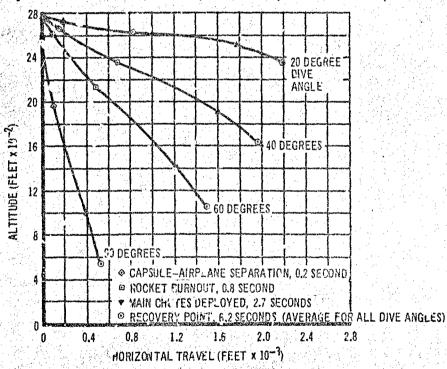


Figure 61. Two-Han Pod Capsule Diva Trajectories, M 0.9

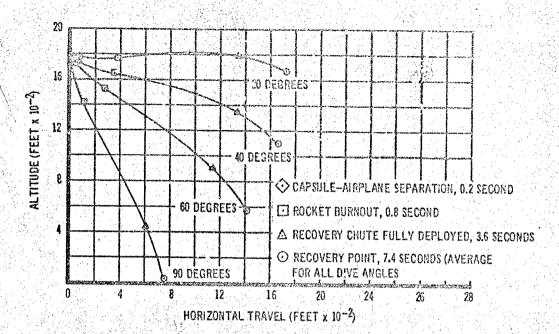


Figure 62. Three-Man Cockpit Pad Capsule Dive Trajectories, 200 Knots

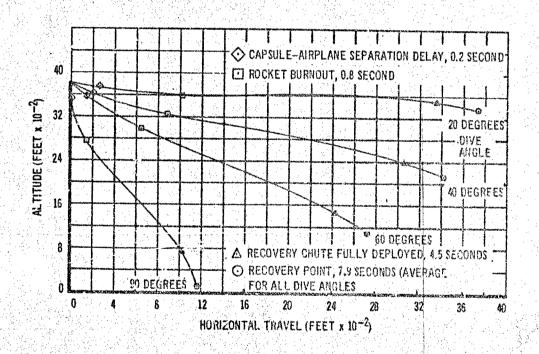


Figure 63. Three-Man Cockpit Pod Capsule Divo Trajectories, 800 Knots

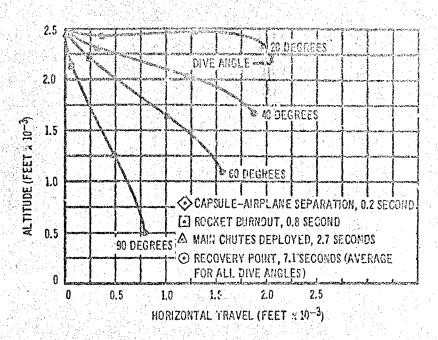


Figure 64. Four-Man Cockpit Pod Capsule Dive Trujectories, 200 Knors

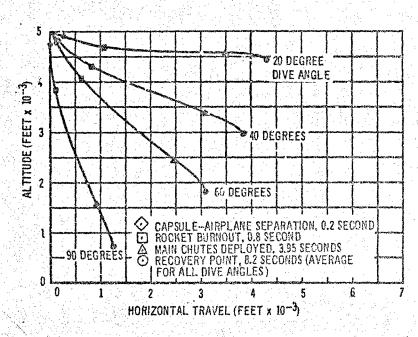


Figure 65. Four-Man Cockpit Pod Capsula Diva Trajectories, 800 Knots

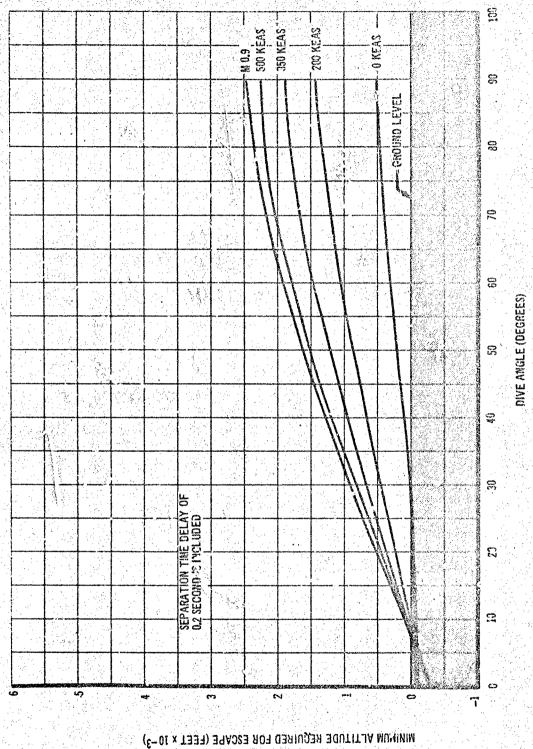


Figure 66. Two-Man Cockpit Pod Capsule Escape Altituda Required

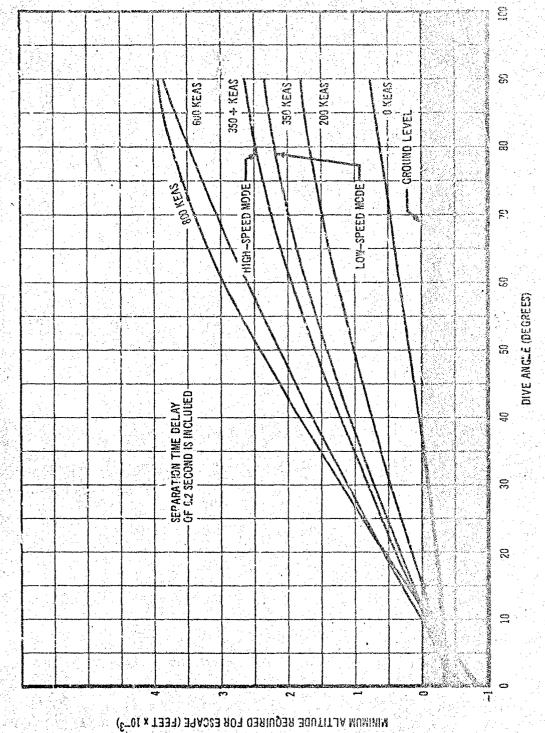


Figure 67. Three-Man Cocket Pod Captule Escape Aintude Required


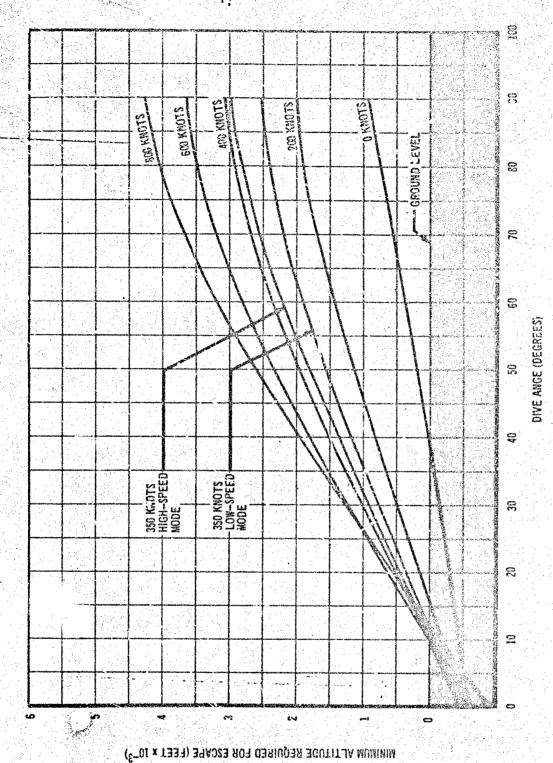


Figure 68. Feur-Man Cockpit Pod Capsule Escape Aititude Required

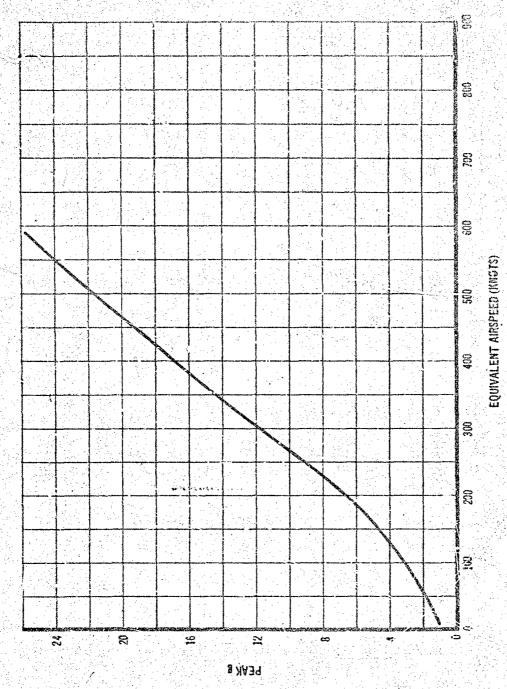

79

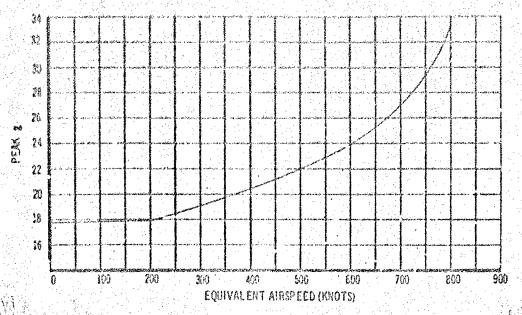


Figure 70. Peak of Three-Man Cockett Pod Capsula

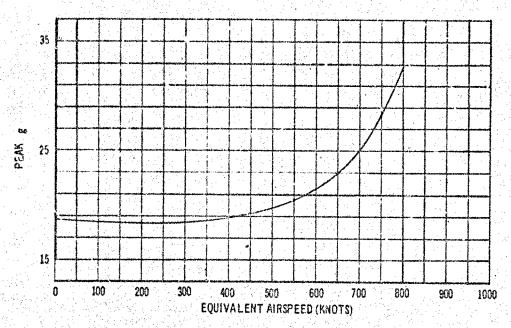


Figure 71. Peck g Four-Man Cockit Pod Capsule

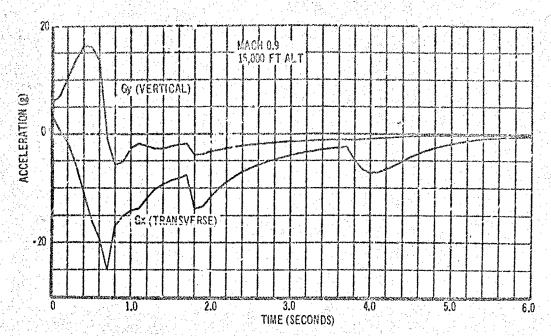


Figure 72. Two-Man Cockpit Pod Capsula Computer Plot of Maximum Acceleration

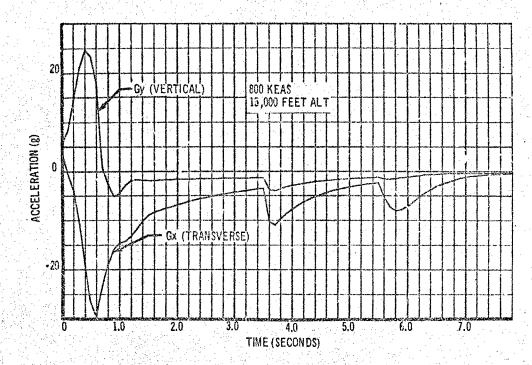


Figure 73. Three-Man Cockpit Pod Capsule Computer Plot of Maximum Acceleration

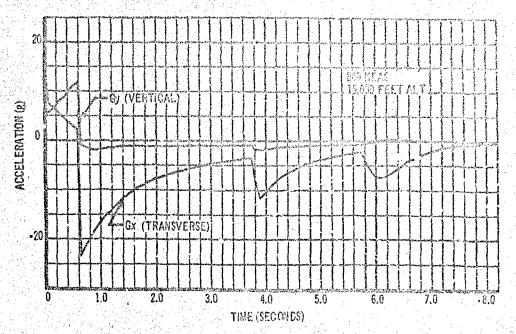


Figure 74: Four-Man Cockpit Pod Capsule Computer Plot of Maximum Acceleration

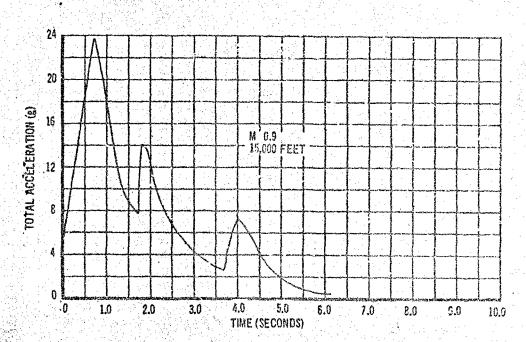


Figure 75. Two-Han Cockpit Pod Capsule - Acceleration Versus Time

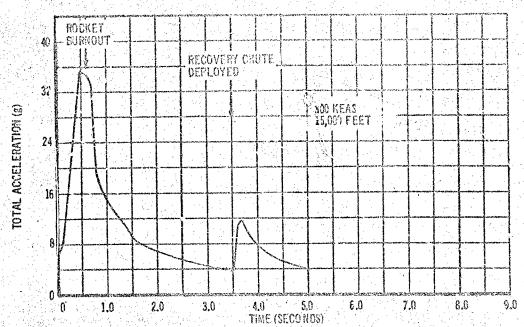


Figure 76. Three-Man Cockyit Pod Copsule - Acceleration Versus Time

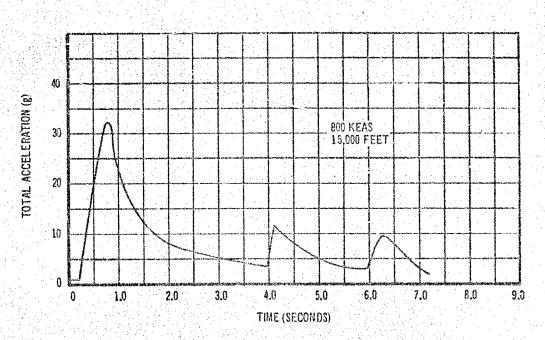


Figure 77. Four-Man Cockpit Pod Capsule - Acceleration Versus Time

# 4. SEPARABLE NOSE CAPSULE CONFIGURATIONS

## a. Configuration

The separable nose capable (SNC) concepts for two-, three-, and four-man configurations are shown in Figs. 78, 78 and 80.

Eucape sequence for the SHC is similar to the sequence described for the cockpit pod capsule. The performance envelopes for the two-, three-, and four-man separable nose capsules are the same as the two-, three-, and four-man cockpit pod capsules. Escape event timing sequences are shown in Figs. 81, 82 and 83.

Table IV lists capsule design data and subsystem sizes and weights. Escape subsystems are described in Section II.5.

### b. Performance

The dynamic characteristics of the separable nose capsules are the same at the cockpit pod capsules.

As for the cockpit pod capsules, the separable nose capsules were computed to fully recover during level flight at ground level from zero velocity to the maximum speed capability of the vehicles. Level flight trajectories are shown in Figs. 84, 85 and 86. Figures 87 through 92 show escape trajectories during diving flight at 200 KEAS and at maximum speed. Minimum escape aititude curves are shown on Figs. 93, 94 and 95. Maximum peak accelerations experienced during escape versus equivalent airspeed are shown in Figs. 96, 97 and 98. Computer plots (Figs. 99, 100 and 101) show vertical and transverse acceleration components during escape at the critical conditions of maximum speed at 15,000 feet. Resultant g for the same conditions are shown in Figs. 102, 103 and 104.

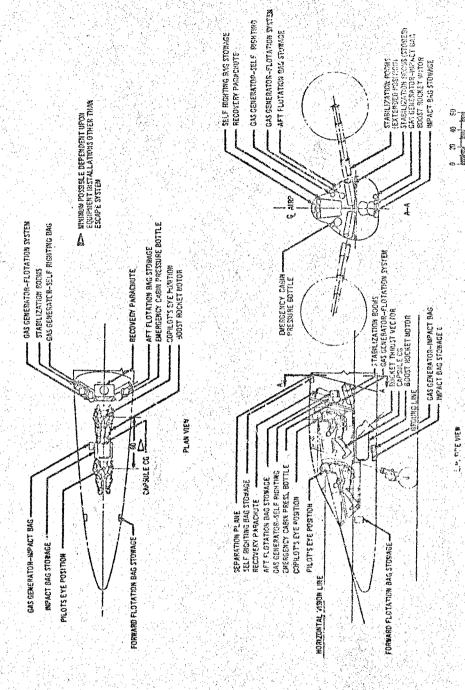


Figure 78. Two-Man Subsonic VTOL Vohicle Saparable Mase Capsula Configuration

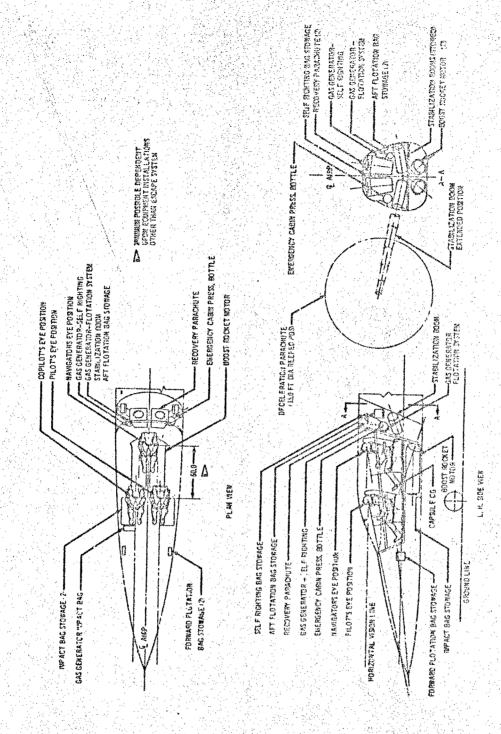


Figura 79. Three-Man Combined Cepability Vehicle Supambia Nosa Capsulu Configuration

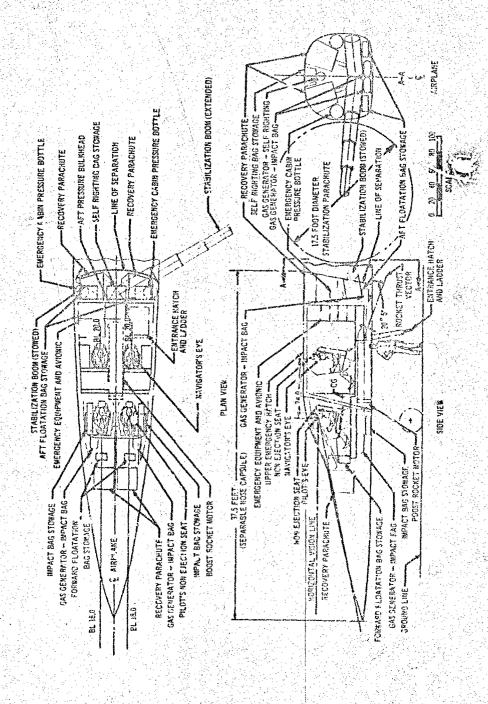


Figure 86. Four-Man Supersonic Dash Vehicle Separable Nose Capsula Configuration

A STATE OF THE PROPERTY OF THE

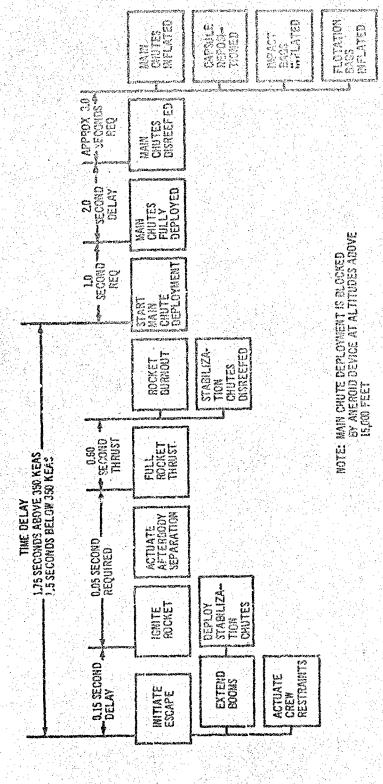


Figure 31. Block Diagram - Escape Events Twa-Man Joparahle Nose Capsule

à

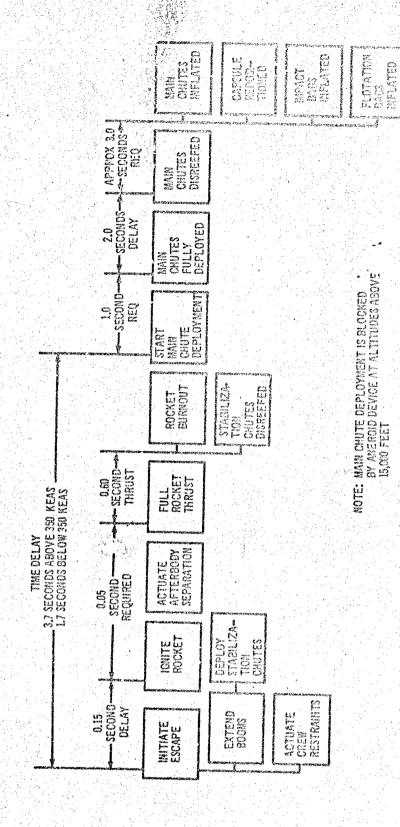


Figure 82. Black Disgram - Escape Events Three-Man Separable Nose Capsule

Figura 83. Block Diagram - Escapa Evants Four-Man Separable Noce Capsula

Table IV. Separable Nose Copsule Design Desa

production and the section of the se	CONTRACTOR	opelates de maiorimanicas; describiros de suces	terrorene messimme metassissis den	free to died to the output reflection and and and
		Vehicle		
		Two Man	Three Man	Four Man
<u>Capsule</u>			Control and Color	A STATE OF THE PARTY OF THE PAR
Weight (total ejectable) Length overall	lb Ft	4,800.0	9,000.0	12,660.0
Ref. area	$\mathbf{F}_1^2$	24.0 24.0	30.0 40.0	37.5
Pitch mertia	Lb-Sec <sup>2</sup> -Ft	2,700.0	12,000.0	63.0 24,700.0
Separation System				
Weight of FLSC	Lb	12.0	12.0	12.0
Weight of initiating system plus junction fittings	Lb	5.5	5.5	5.5
Boost Rocket				
Thrust	Ib	58.600.0	184,000.0	245,000.0
Burntime	Sec	0.6		0.6
Volume	$In^3$	6,000.0	21,300.0	30,600.0
Nozzle angle Weight	Deg Lb	46.5		20.5
Thrust/CG Misalignment	Ft	250.0 0.5	760.0 <b>0.</b> 5	1,020.0 0.5
Stabilization Booms				
(2 per vehicle)				
No. of tubes		3.0	3.0	3.0
Boom length, stored	Ft	4.0	5.0	5.4
Boom length, extended	Ft	11.0	13.0	16.2
Storage tube OD Weight (total)	In Lb	16.0	19.7	26.9
(not including bridle and parachute weight)		1,200.6	1,800.0	3,900.0
Stabilization Farachu (2 per vehicle)				
Reefed diameter	Ft	6.5	10.5	12.0
Flat diameter	<b>F</b>	13.0	15.0	17.5
Stowed vol (total)	ju,	3,000.0	6,000.0	11,000.0
Weight (total)	Lh	50.0	110.0	200.0

profession entre a rear a transaction of management and analytical animal parameter advised to relative to the	n shacharithai nashasara	The condition with the production of the condition of the		
		enter transportunitarion apparente annunciario presentante anterior de anterior de la contractiona de la contraction de		
		Two Man	Three Man	four Man
Recovery Parachutes		for the state and the state of	the Scientific for the about the convenience of a series.	and the contract and the contract of the contract of
No. of parachutes		2.0	3.0	4.0
Recfed diameter Ft		11.9	13.7	13.5
Flat diameter Stowed vol (total)  Ft In3		59.8	69.0	73.4
		11,500.0	22,500.0	30,000.0
Weight (total)		150.0	290.0	395.0
Impact Attenuation System				
Bog weight Lh	* * *	38.0	507 A	
Inflated vot Ft3		89.0	57.0 167.0	74.0
3towed vol In3		3,100.0	4,600.0	235.0 5,900.0
Pressure potile Vol Ing		860.0	1,600.0	2,200.0
Inflation assy weight Do		31.0	51.0	68.0
Flotation System				
Bag dia spherical, (4 each) Ft				
Bag weight (total)		3.3	4.0	4.5
Inflation bottle vol In <sup>3</sup>		25.0 910.0	46.0 1,880.0	54.0
Bottle, gas and valve wt ib		29.7	51.5	2,470.0 63.2
Self righting, bag, (1 each)				00.2
(Same dia as flot bag)				
Bag, weight Inflation bottle vol fu <sup>3</sup>		6.3	11.5	13.5
Bottle, gas and valve will Lb		240.0	470.0	620.0
		11.1	15.5	18.9
We! ibt Summary (Lb)				THE STATE OF THE S
Separation system		17.5	in e	
Boost rocket		250.0	17.5 760.0	1,020.0
Stabilization booms		1,200.3	1,800.0	3,900.0
Stabilization parachutes		50.0	110.0	200.0
Recovery parachutes		150.0	290.0	395.0
Impart attenuation system Flotation system		69.0	108.0	142.0
Rocket support structure		71.2	124.5	156,4
Stabilization boom attachment		40.0 73.0	124.0	165.0
Recovery parachute attachment	1,65.	21.0	110.0 40.0	238.0
Survival equipment		100.0	150.0	200.0
TOTAL (Penalty)		2,041.7	3,634.0	6,488.1
The state of the s	-	- Contract C		~ 7

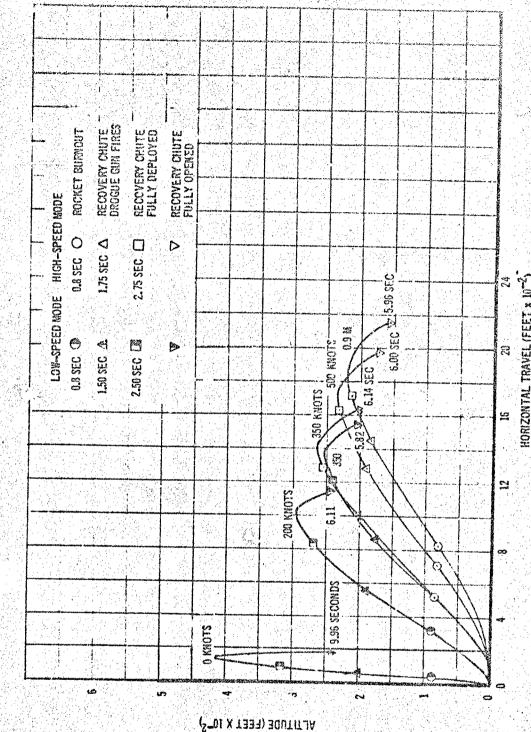


Figure 84. Two-Man Separable Nose Capsula Lovel Flight Trajectusies

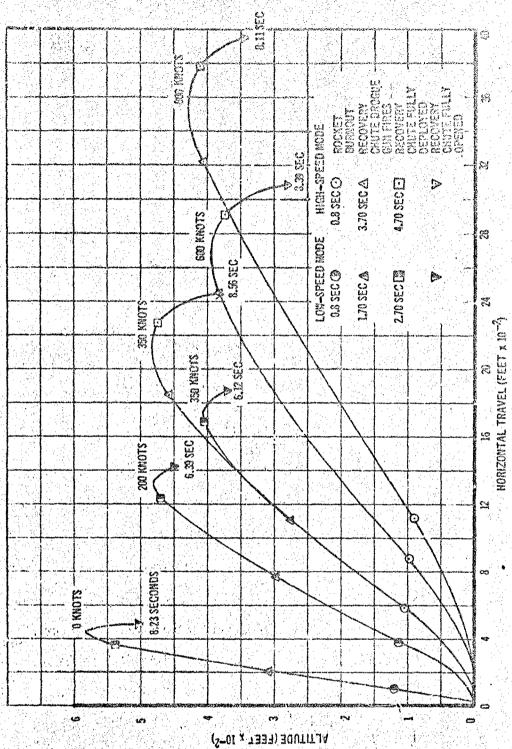


Figure 85. Three-Man Separable Mona Captula Lavol Flight Trajactories

Figure 86. Four-Man Separable Nose Capsule Level Flight Trajectories

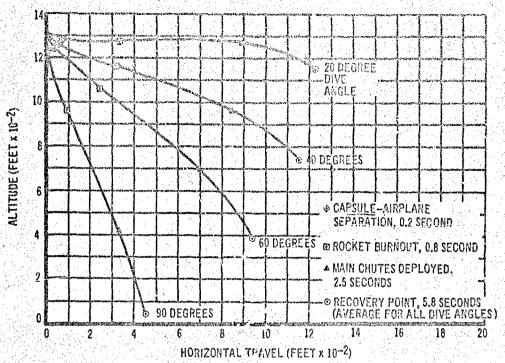


Figure 87. Two-Man Separable Nosa Cupsula Dive Trajectories, 200 Knots


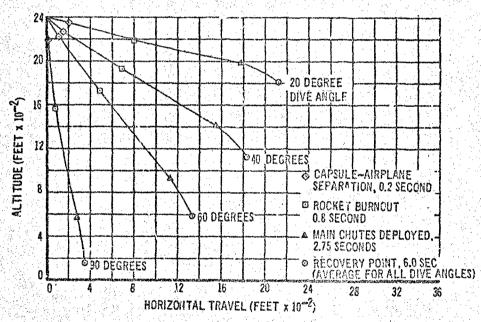


Figure 88. Two-Man Separable Nose Capsule Dive Trajectories, M 0.9

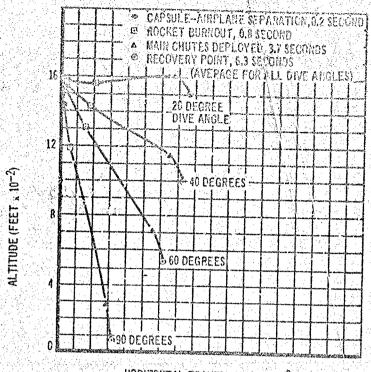

HORIZONTAL TRAVEL (FEET x 10-2)

Figure 89. Three-Man Separable Nose Capsule Divo Trajectories, 200 Knots

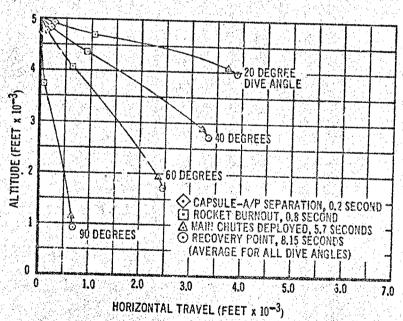


Figure 90. Three-Man Separable Nose Capsule Dive Trajectories, 800 Knots

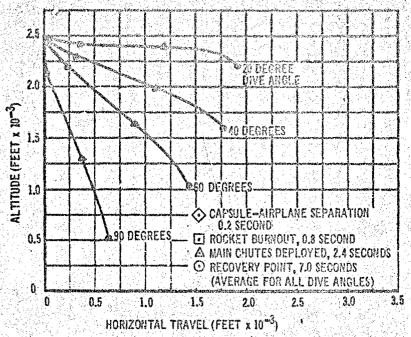


Figure 91. Four-Man Separable Nose Capsulo Dive Trajectories, 200 Knots

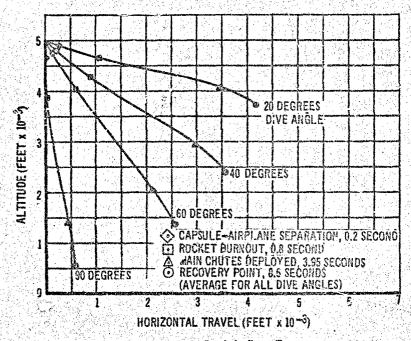


Figure 92. Four-Man Separable Mose Capsule Dive Trajectories, 800 Knots

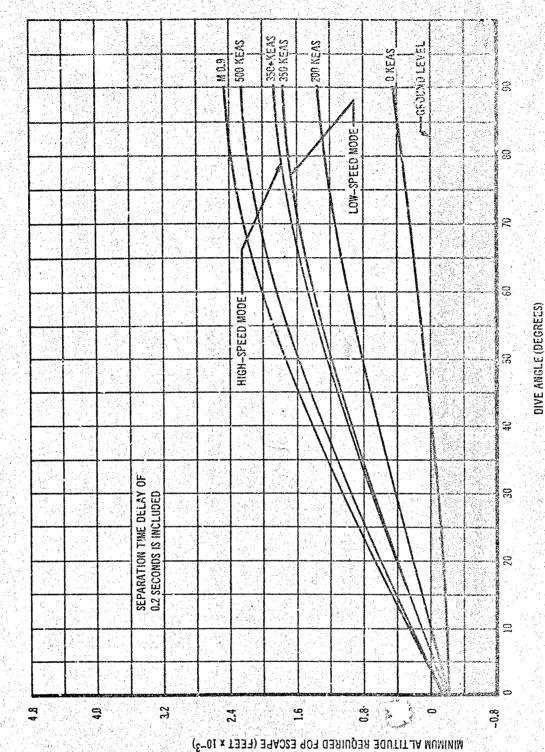


Figure 93. Two-Man Separable Nose Capsule - Minimum Escape Afritudes



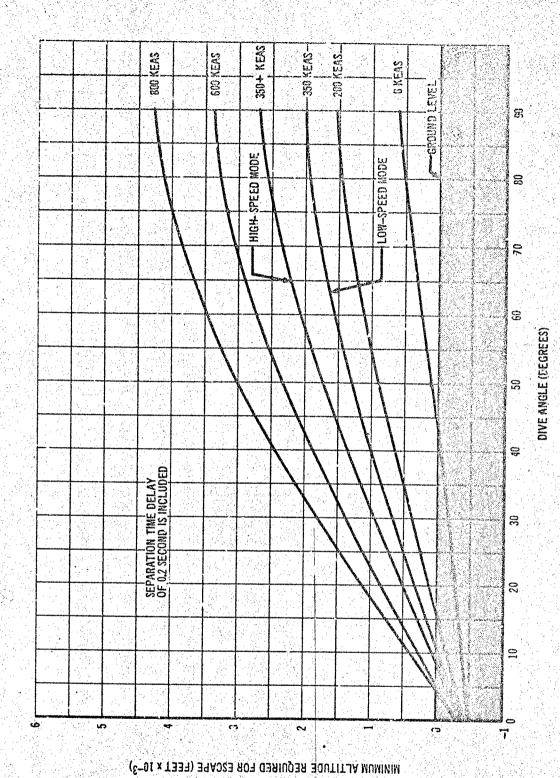


Figure 94. Three-Man Separable Nose Cansula - Minimum Escape Allibudes

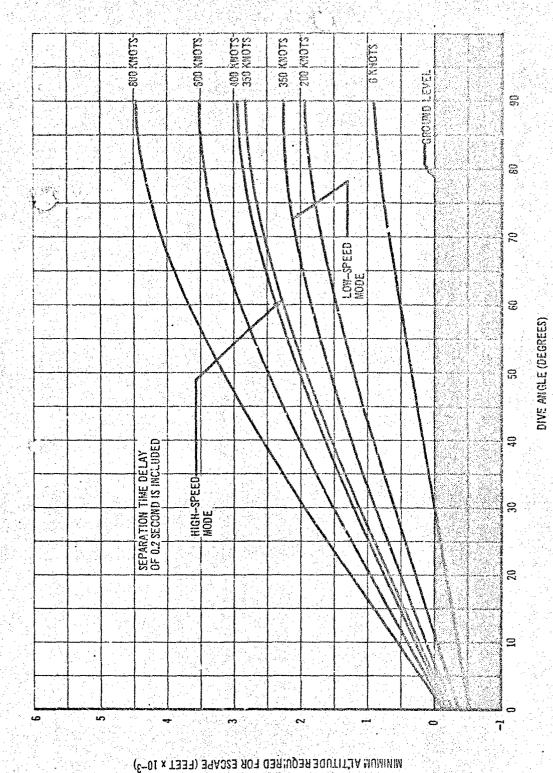


Figure 95. Four-Man Separable Nasa Capsule - Minimum Escape Altitudes

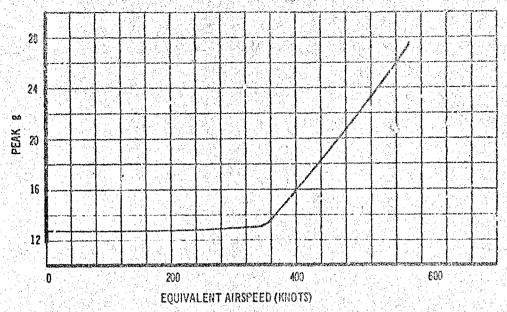


Figure 96. Peak g, Two-Man Separable Nose Capsule

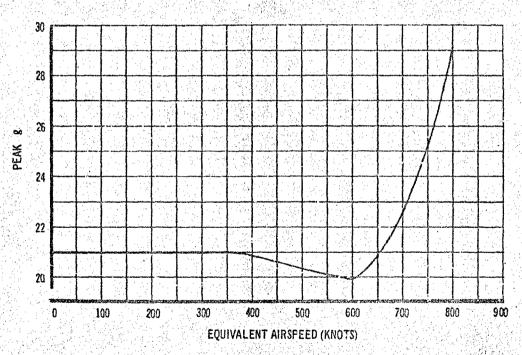


Figure 97. Peck y, Three-Man Separable Nose Carsule

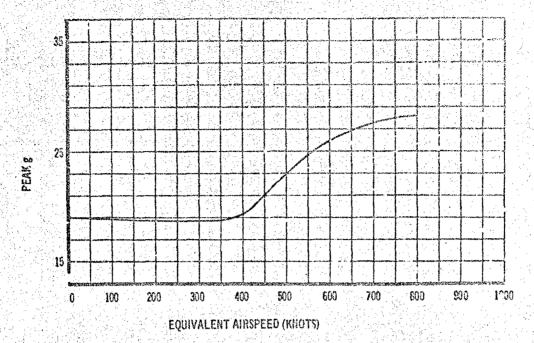


Figure 98. Peak g. Four-Men Separable Hose Capsule

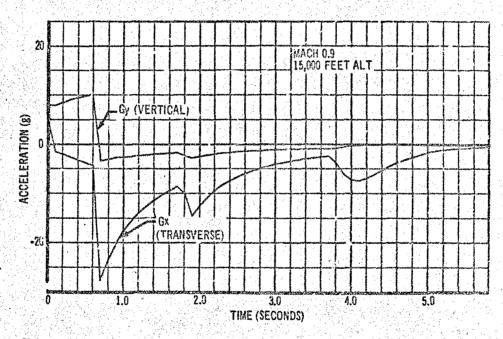


Figure 99. Two-Man Separable Nose Capsule Computer Plot of Maximum Acceleration

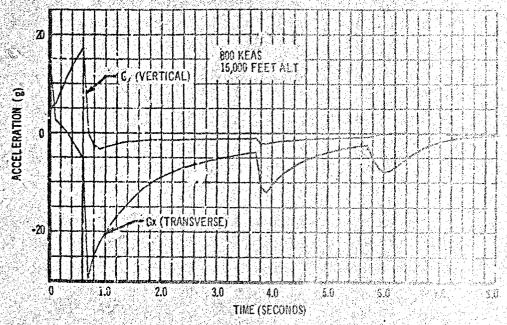


Figure 100. Three-Man Separable Nose Copsule Computer Plat of Maximum Accelsiation

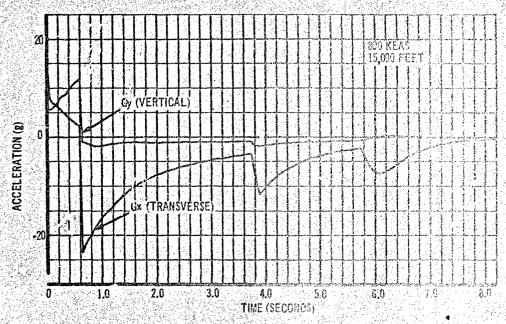


Figure 101. Four-Man Separable Nose Capsule Computer Plat of Maximum Acceleration

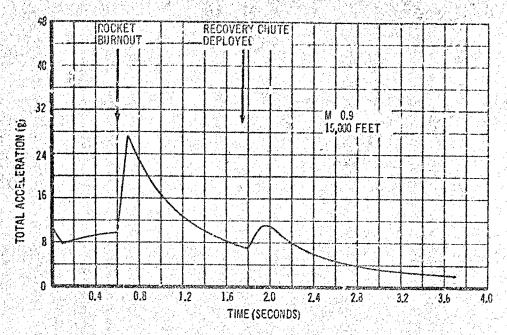


Figure 102. Two-Man Separable Nose Capsule - Accaleration Versus Time

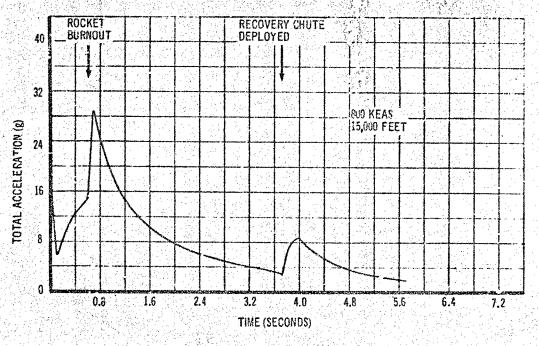


Figure 103. Three-Man Separable Nose Capsule - Acceleration Versus Time

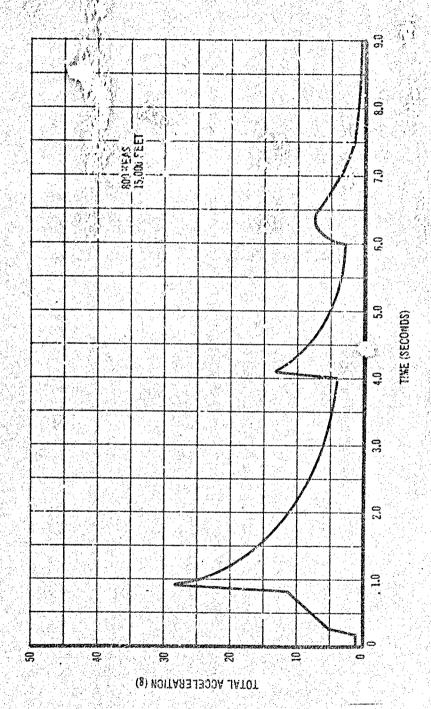


Figure 164. Four Kin Separable Nave Capsule - Accelemnion Versus Time

#### 5. CAPSULE SUBSYSTEMS

Subsystem descriptions contained in this section are generally applicable to each of the representative CPC and SNC escape concepts for the two-, three-, and four-man vehicles. This information, together with the design data of the preceding sections, completes the definitions of the capside subsystems.

# a. Separation System

Separation is accomulished with flexible linear shaped charges (FLSC) installed at the separation plane in skin, structure, and around tubing and wires. The respective separation planes are shown on each capsule drawing. The FLSC weight shown includes weight allowance for charge ho'der, but no weight is added for cover plates that might be required in some aroas. Initiation occurs simultaneously with boost rocket firing. Two separate explosive initiators mounted at the boost rocket initiator accomplish this. The explosive attinuous is transferred through a metal clad mild detonating fuse (MDF). Explosive junction of the MDF and FLSC. System reliability is improved by providing explosive connections at both ends of each segment of the FLSC. The whole system is sealed in order to function under water.

#### b. Boost Rocket

The capsule boost rocket is a solid propellant rocket with a fixed nozzle angle. The rocket case consists of welded steel with a wound fiberglass outer wrap. Threaded attachments will be used for the end cap and the nozzle assemblies. The rocket is mounted on the capsule structure so that the thrust line presess slightly underneath the capsule center of gravity. This thrust eccentricity is calculated to provide the capsule with a positive lift attitude. Estimated rocket burntime is 0.6 second for all capsules.

#### c. Stabilization Booms

The ballistically deployed telescoping booms consist of three aluminum tubes each. Fist ribbon stabilization/deceleration parachutes are stored in and released from the booms. The booms and the stabilization chutes are deployed at separation of the capsule from the aircraft.

Aircraft separable nose and cockpit pod escape capsules are basically aerodynamically unstable bodies. To stabilize the capsules, large parachute forces are required. These forces a directly affect stabilization parachute size and boom size.

Alternate stabilization systems such as canard, or even a reaction control system, might afford some weight savings. This depends on capsule configuration and the stabilizing forces required. However, any stabilization system imposes a respectable weight penalty for large capsules.

#### d. Parachutes

The stabilization/d beleration parachuse are drogue gun deployed in a real d condition at the time of escape rocket industry. At the time of rocket burnout, the parachutes are disreefed to provide the tapsule with a maximum of 30g deceleration. Coulcar ribbon type parachutes have sed for this purpose.

When capsule is selfy decreases to a point where the dynamic pressure is 300 psf, the deceleration chutes are jettisoned and the main recovery parachutes are gur deployed and opened to a rected condition. The type of parachute chosen for this purpose is the Ring Sail canopy. This parachute is sized to provide the expeule with a descent velocity of 30 fps.

# e. Impact Attenus Lion System

The impact attenuation system is activated at the time the recovery parachute is filled. It consists of an inflating system and impact bags. The elements making up the inflating system are a 3000 psi bottle of nitrogen, a squib valve, pressure gauge, regulator, and distribution lines. Gas quantity available is sufficient to inflate the bag to a pressure of 2 to 3 psi.

The bag has a short cylindrical shape and is made of neorene coated nylon. It is provided with blowout plugs and orifices. The plugs blow out when the compression of the bag reaches an equivalent of 10g deceleration. Orifices then limit the maximum deceleration to approximately 25g. The impact bag is either compartmentized or rigidized internally to permit impact angles up to 15 degrees. Deceleration stroke of the bag is kept to the lowest distance practicable.

#### f. Flotation System

The flotation system for either the CPC or the SNC consists of four flotation bags and one self-righting bag. All bags are approximately spherical in shape and are made of rubber covered nylon or dacron. Two separate inflation systems, one supplying the flotation bags and the other the self-righting bag, are installed. The flotation bag inflation system consists of one 3000 pst bottle of nitrogen provided with redundant squib valves and a regulator. Four check and pressure relief valves and metering orifices, one at each flotation bag, are also included. A separate system consisting of a pressure bottle and a regulator valve inflates the self-righting bag. Actuation of the flotation system is sequenced so that the self-righting bag is inflated first.

# g. Nose Thruster (Four-Man Cock). Pod Capsule)

In the cockpit pod concept for the two-and three-man vehicles, the pod containing the crew is lifted out of the fuselage. In the four-man vehicle, how-ever, the cockpit pod is severed the same way as the separable nose capsule, with a rear parting plane completely through the challes. The cockpit pod capsule is then made by dropping the nose radome from the rest of the capsule.

The nose thrusters push the airplane radome down and away from the rest of the capsule immediately after it has been separated from the capsule. The system consists of two ballistically actuated thrusters weighting about 6.5 pounds each.

# 6. Capsule aerodinamic characteristics

Capsulo performance calculations were based on basic cockpit pod and separable rose capsule wind tunnel data from tests conducted in the Cornell 8-foot transonic wind tunnel and the Boeing supersonic wind tunnel. These data were obtained over if Mach number range of 0.5 to 3.6 for pitch angles to ±60 degrees and yaw angles .6 40 degrees. Figures 105 through 108 show the capsule aerodynamic characteristics.

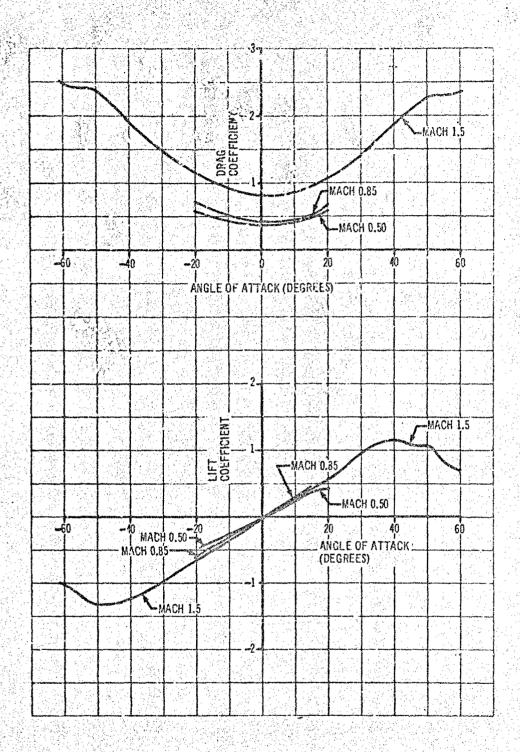


Figure 105. Cockpit Pod Capsule Drag and Lift Coefficients

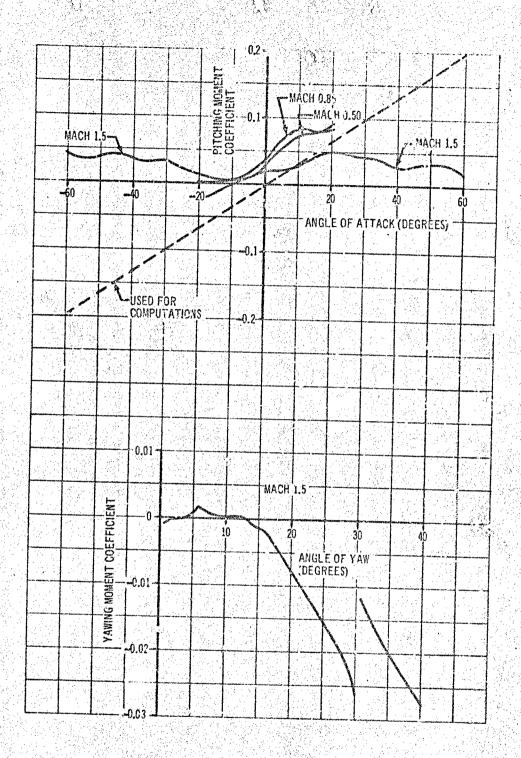


Figure 106. Cockpit Pod Captule Pitch and Yaw Coefficients

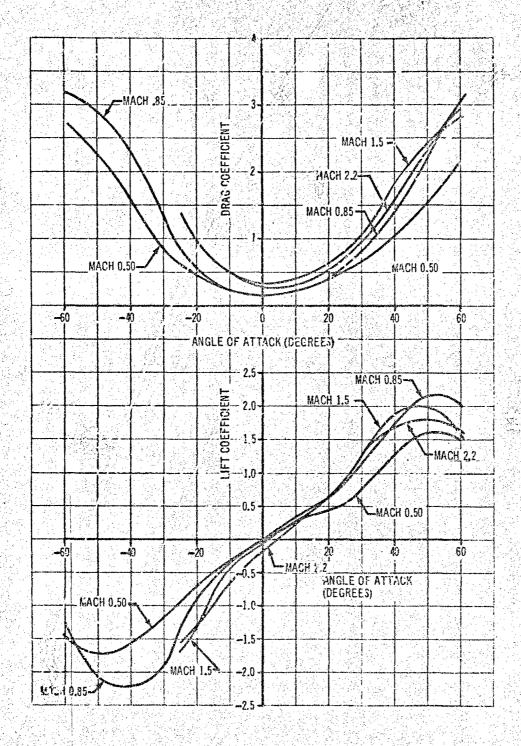


Figure 107. Separable Nose Capsule Drag and Lift Coefficients

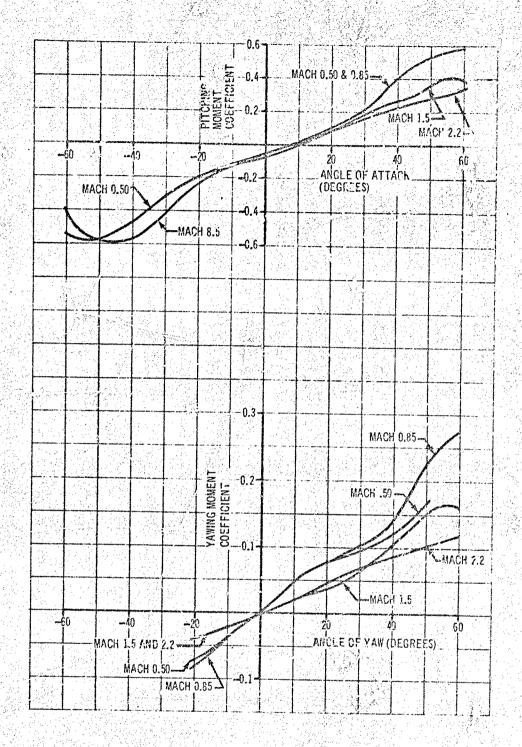


Figure 108. Separable Nose Capsule Pitch and Yaw Coefficients

#### SECTION IV

# TEST REQUIREMENTS

This rection describes tests required to verify escape system performance for the twelve representative escape concept/vehicles configurations. The test programs described include wind tunnel model tests, subsystem tests, and integrated system development and qualification tests that normally would be accomplished by the airframe prime contractor. In addition, estimated test program scheduling requirements and budgetary cost data are presented for basic subsystems development that normally would be accomplished by comparison of the specializing in the specific subsystem technologies.

## 1. DEVELOPMENT AND QUALIFICATION TESTS

Estimated test schedule requirements for developmental and qualification programs for open ejection seats, encapsulated ejection seats, and cockpit and nose capsule systems are shown in Figs. 109, 110, and 111 respectively. The test item numbers refer to test requirements described in Tables V and VI. The open and encapsulated ejection seats were considered to be supplier-developed items and the detail test requirements described herein include only those tests required to verify system performance, prove seat/vehicle compatibility, and qualify the integrated system. However, the scheduling requirements for seat development are included in the phasing chart.

#### 2. WIND TUNNEL PROGRAMS

Wind tunnel test programs were developed for the twelve escape concept/vehicle combinations to determine the overall RDT&E requirements and costs for each combination, and to support the design, test, and qualification of these systems. However, due to the similarity in the test requirements for some configurations the programs were grouped as shown in the following test plans.

a. Two-Man Subsonic VTOL Vehicle Open Ejection Seats and Encapsulated Ejection Seats

Equipment

- Transonic wind tunnel.
- One partial aircraft model (nose to trailing edge of the wings, wings included). Model will have two operable hatches and capability to eject seats from either or both crew stations.
- One force model of ejection seat/encapsulated seat.
- Fifteen ejectable seat models and hatches.
- Three configurations of seat stabilizing devices attachable to both force and ejection models. Eighteen sets of stabilizing devices

	DEVELO	OPEN EJECTION SEAT PMENT AND QUALIFICATION PHASING CHART
TEST	ITEM	MONTHS 24 36
WIND TUNNEL		
SUPPLIER DEVELOPMENT_TESTS		
STATIC TESTS	Q-1	
ENVIRONMENTAL	Q-2	
PREOPERATIONAL	Q-3	
CANOPY REMOVAL	Q-4	
GROUND EJECTION	Q-5	
SLED.TEST\$	Q-6	
FLIGHT TESTS	0-7	

Q REFERS TO QUALIFICATION TESTS TABLE VI Figure 109. Open Ejection Seat Test Requirements

ENCAPSULATED EJECTION SEAT  DEVELOPMENT AND QUALIFICATION PHASING CHART				
TEST	ITEM	MONTHS 12 24 36		
WIND TUNNEI SUPPLIER DEVELOPMENT TESTS DECELERATOR CHUTE	0-8			
RECOVERY CHUTE  STATIC TESTS	Q-9 Q-1			
ENVIRONMENTAL PREOPERATIONAL	Q-2 Q-3			
CANOPY REMOVAL  SURFACE IMPACT AND FLOTATION  GROUND EJECTION	Q-4 Q-12 Q-5			
SLED TESTS. FLIGHT TESTS	Q-6 Q-7			

Q REFERS TO QUALIFICATION TESTS TABLE VI

Figure 110. Encapsulated Ejection Seat Test Requirements

	Committee of the committee of	IT POD AND SEPARABLE NOSE CAPS! LE MENT AND QUALIFICATION PHASING CHART
TEST	ITEM	MONTHS 12 24 36
WIND TUNNEL		
SUPPLIER COMPONENT DEVELOPMENT		
RESTRAINT SYSTEM	D-1	
EMERGENCY PRESSURIZATION	0-2	
SEVERANCE SYSTEM	D-3	
IMPACT AND FLOTATION SYSTEMS	D-4	
FUNCTIONAL TESTS	D-5	
STRUCTURAL COMPONENTS	D-6	
SLED TESTS	D-7	
DECELERATOR CHUTE	Q-8	
RECOVERY CHUTE	Q-9	
STATIC TESTS	Q-10	
ENVIRONMENTAL	Q-11	
SURFACE IMPACT	Q-12	
FLIGHT TESTS	Q-13	
SLED TESTS	Q-14	

D REFERS TO DEVELOPMENT TESTS TABLE V Q REFERS TO QUALIFICATION TESTS TABLE VI

Figure 111. Cockpit Pod and Separable Nose Capsule Test Requirements

ITEM	TEST TYPE	MAJOR EQUIPMENT	TEST CON
D-1	Restraint Systems	Mechanical lab space. Cockpit floor, operable seats, and seat attachment structure.	Apply loads to cressystem.
D-2	Emergency Pressurization System	Mechanical lab space. Nose section mockup incorporating cockpit capsule/separable nose areas. Functioning seals associated with severance operation.	Pressurize 20 tim severance simulat
D-3	Severance System	Mechanical lab space. Mockup of capsule with actual aircraft structure contiguous to the separation plane.  100 test items for severance tests, structural samples, cable runs, ducts, and wire bundles.  Spare parts to support full-scale separation firings.	(1) 100 severance small test ite (2) 10 severance the complete plane.
D-4	Impact & Flotation Systems	Mechanical lab space. Boilerplate capsule with actual impact system, crushable structure, energy absorbers, or impact bags. Flotation equipment. Weight of drop bodies to be controlled.  Water drop facility.	Conduct 12 drop to sule/separable no land surface, and Impacts will occur capsule orientation the flight path and conditions of crossite successions.
D-5	Functional Tests	Mechanical lab space. Breadboard set-up of escape system ballistic train. Includes all operating components up to severance system initiation manifold and rocket.  System will include electrical, gas operated, and manually operated devices.	Conduct 20 tests of operation.
<b>2</b> -6	Structural Component	Mechanical lab space. Structural test items: Rocket attachment fittings; Parachute attachment fittings; Seat mountings; Stabilizing booms and attachments; Stabilizing boom actuators and attachments.	Ten load tesis on
D-7	Sled Tests	Dummy (Boilerplate) capsules with prototype rocketmotors, stabilization booms, stabilization parachutes, recovery parachutes, and impact subsystems.	Conduct eight sleethe system at increase from zero to capability of the v

Table Y. Subsystem Developmental Testing
- Cackpit Pad Copsule/Separable Nase Capsule

TEST CONDITIONS	SYTZ	OILIECTIVE	INSTRUMENTATION
loads to crew restraint	Contractor	Revelop restraint system.	Londs
urize 20 times. Capsule ince simulated.	Contractor	(1) Develop emergency pressurization system sensing and control system. (2) Develop pressure scals for severance plans.	Pressure Time
O severance firings of half test items. severance firings of complete separation ane.	Contractor	<ul> <li>(3) Develop capability to pressurize cansule.</li> <li>(1) Develop design details for separation plane.</li> <li>(2) Develop complete severance system.</li> </ul>	Pressure Time Movies
et 12 drop tests of cap- ieparable nose; 6 onto urface, and 6 into water. ts will occur with various te orientations relative to whi path and in several	Contractof	Develop impact attenuation system.	Accelerations Time Movies
ions of crosswind. ct 20 tests of system ion.	Contractor	(1) Integration of system composi- ents. (2) Development of desired oper- ating characteristics.	Pressure Time Movies
and tests on each item.	Contractor	Develop structural components.	Pressure Time Movies
ict eight sled tests of ystem at increments of I from zero to the maximum ility of the vehicle.	Traci.	Integrated system devisionment and subsystem refinement or modification.	Acceleration Loads Time Movies



ITEM	TEST TYPE	MAJOR EQUIPMENT	TEST CONDITIO
Q-1	Static Structural Tests	Seat and attach structure. Fixture for application of loads.	Apply loads.
Q-2	Environmental Tests	Structurally complete seat and support structure assembly. Support fixture.	One functional firing at the end of the environmental testing. Tests: high tenature, low temperature, humidity, salt spray, sarvibration.
C3	Preoperational	Cockpit mockup including seat system less only catapult and hatch thrusters. Support fixture.	Actuate system once for crew position.
Q-4	Canopy/Hatch Removal	Cockpif meckup with canopy removal system and required portions of ejection system.	Actuate each hatch removed tem once. Hatch is close locked for the test. Utiling seat trigger mechanism for the sequence. Two three, and four jettison is respectively, two, three four-place airplanes.
Q-5	Ground Ejection Test	Cockpit mockup including complete seat system. Support fixture.	Eject seat twice from each position. Once with norm hatch removal as a conse of the ejection sequence a once through the canopy, six, and eight ejections for espectively, two, three four place airplanes.
<b>Q</b> -6	Sled Tests	Complete aircraftness mockup, with operable ejection sear system. Fixture; nose section to sled attachment. Test seats are recovered undamaged 50% of the time. Remainder lost,	Required Test Flection  Speeds/ 2nd Stations: Pilot Crew  Minimum IAS 1 1 Intermediate IAS 1 0 Maximum IAS 1 1
Referi	ENCF: MIL-E-9426A MIL-C-25969A MIL-C-26218		Five, seven, and nine eje spectively, two, three, of airplanes.

nobles of the control of the control

ONDITIONS	SITE	OWECTIVE	ins. f.umentation
	Contractor	Structural integrity demonstration.	Loads
ring at the nmental high temper- trature, altitude, tray, sand and	Contractor	(i) Functional demonstration. (2) Demonstrate design resistance to environmental effects on performance.	Temperature Time Pressure Movies
nce for each	Contractor	<ul> <li>(1) Obtain pressure and force time historics from system operation.</li> <li>(2) Verify proper sequencing of serial operations.</li> </ul>	Pressure Time Loids Movies
ch removal sys- a is closed and st. Utilize the hanism for initia- nce. Two, ettison tests for, o, three, or anes.	Contractor	(1) Functional demonstration.	Pressure Time Loads Movies
from each crew with normal is a consequence equence and canopy: Four, ections for, o, three, or anes.	Contractor	(i) Static demonstration of escape system.	Pressure Time Loads Movies Accelerations
2nd 3rd 4th Crew Crew Crew  1 i i 6 0 0	Tesi Track	Demonstrate sea level oper- ation of system over speed range of aircraft.	Pressure Load Time Acceleration Movies
d nine ejections for, re- three, or four-place			

ITEM	TEST TYPE	MAJOR EQUIPMENT	TEST CONDITION
Q-7	Flight Tests	Test Aircraft; everable ejection seat system at selected crew station. Test seats are recovered undamaged 50% of the time. Remainder lost.	Required Test Eject  Speeds/ Znd Stations: Pilot Crew  Min. Mach. no. 0 1 Intermediate Mach. no. 0 1 Max. Mach. no. 0 2
Q-8	First Stage Decelerator	(1) Test article shape and fixture for attachment to sled.	Four, six, and eight ejection tively, from two, three or for airplanes.  (1) Deploy first stage deceled tests. Conduct two tests at equally-spaced speeds from maximum. Test article is no from sled.
		(2) Seven expendable test article shapes. Carrier airplane.	(2) Conduct seven tests. De deployment altitude approxim 1,000 feet. Test article reletitude tailored to give deploy ocities over desired speed re
		(3) Seven expendable test article shapes. Carrier airplane.	(3) Conduct seven tests. To release is from maximum a carrier aircraft. Deployme from minimum to maximum Mach Number.
<b>Q-9</b>	Main Recovery Parachute	Test article share. Carrier air- plane modified for air drop of test article.	Conduct ten drops from safe drops minimum carrier aped drops in equal increments to speed of carrier.
Q-10	Static Structural Tests	Structi rally complete test article.	Apply loads.
<b>0-11</b>	Environmental Tests	Structurally complete tost article with operational escape subsystems (1) Seat, including restraint & positioning system.  (2) Structural mockup with actual separation plant, separation system and rocket ignition system.	Environmental tests on escal subsystems. System function test at the conclusion of environmental test. Tests: high teerature, low temperature, a humidity, salt spray, sand, vibration.
		(3) Parachute subsystems.	

 $\{x_i\}$ 

			Collinary Collinary
VOLUTIONS	SITE	ODJECTIVE	Instrumentation
ct Ejections  2nd 3rd 4th Crew Crew Crew  1 0 0  1 0 6  2 2 2  t ejections, respective or four-place	Drop Range	Demonstrate altitude operation of the system.	Pressure Load Time Acceleration Movies
ge decelerator in ten tests at each of five ds from minimum to icle is not launched	Track	(1) Demonstrate satisfactory deploy- ment characteristics and chute stability in the wake of the test article.	Load Accelerations Pressure Movies
ests. Decelerator approximately ticle release al- e deployment vel- speed range.	Drop Range	Verify predicted deceleration loads. (2) Demonstrate satisfactory operation in free-stream conditions.	
ests. Test article dimum altitude of leployments are leximum available.	Drop Range	(3) Demonstrate satisfactory operation at high Mach numbers.	
rom safe altitude, five rier speed and five ments to maximum	Drop Range	Demonstrate deployment character- istics, chute stability, and design sink rates.	Load Acceleration Movies
	Contractor	(1) Functional demonstration, (2) Data to prove demonstration,	Load
on escape in functional in of environ- high temp- rature, altitude, y, sand, and	Contractor	Demonstrate design resistance to environmental effects on perfor- mance.	Temperature Pressure Time Movies



ITEM	TEST TYPE	MAJOR EQUIPMENT	TEST CONDITION
<b>Q</b> -12	Surface Impact	Structurally complete test article with operational escape subsystems. Drop facility for land and water drops. Spare parts for repair after land drop.	Erop tests require impo- combining maximum desi- rate with maximum desi- components. Test article positioned in most critical tation with respect to sur- at instant of impact.
			(1) Conduct one drop out crete surface. Repair to ticle as required.
			(2) Conduct one drop out water surface. No restor of test article after water and before sea worthiness allowed.
			(3) Conduct sea worthing stration in Beaufort scale Seventy-two hour flotation stability demonstration re
Q-13	Flight Tests	Structurally complete test article with operational escape subsystems except: no rocket. Nine repair	Conduct a total of ten dro a carrier hipplane.
		kits for restoration of impact system.	(1) Five drops at eyen in of speed from minimum to muse of carrier. Drop as 2000 feet.
			(2) Five drops at even in of speed from minimum to mum of carrier. Drop as maximum of carrier.
Q-14	Śled Tests	Structurally complete test article with operational escape subsystems. Fixture for attachment to sed that permits small adjustment of angle of attich and yaw angle. Seven repair kits for restoration of impact system. For capsule and separable nose type tests: Seven kits for replacement of structure at separation plane.	Conduct eight test operation escape system from a Two tests at ecro airspect remaining tests at even it of airspeed from minimal marimum. One additional at maximum IAS. Eight utively successful demonrequired.

ITTONS	STE	OBJECTIVE	instrumentation
impact velocity n design sirk design drif: article shall be critical orien- to surface track	Corractor	(1) Functional demonstration of impact attenuation system. (2) Data to prove demonstration.	Acceleration Time Movies
op onto a con- pair test ar-			
op onto calm restoration water drop thiness test			
rthiness demon- t scale 5 seas. lotation and ition required.			
ten drops from  sven increments imum to maxi- Drop altitude	Drop Range	<ul> <li>(1) Recovery system operational demonstration.</li> <li>(2) System data.</li> </ul>	Acceleration Time Movies
even increments imum to maxi- Drop altitude er.			
operations of from sled. sirspeed; five even increments minimum to dditional test Eight consecdemonstrations	Track	(1) Operational demonstration. (2) System data.	Acceleration Time Movies
demonstrations			

will be required. Fifteen are presumed to be consumt I during the ejection tests; three used in development test.

- Two high-speed motion picture cameras mounted on the tunnel ceiling and wall for plan and elevation pictures.
- e Two nultiple-exposure still cameras; plan and evaluation.

#### Test Conditions

- Obtain forces and moments on seat model in free-stream conditions. Proximity to airplane not required. Develop required stabilizer configuration.
- Eject model scat ten times from one crew position and five times from the other. Ten ejections will cover a range of speeds and airplane attitudes from the primary test station. Five ejections from the second crew station under the most critical combinations of speed and attitude.

#### Test Variables

0.3≤M≤1.i (M may be scaled for ejection tests)

h = sea level, and scaled 25,000 feet

Airplane attitude (ejection tests):

$$-5^{\circ} \le a_{A} \le 10^{\circ}$$
  $\Delta a_{A} = 5^{\circ}$   
 $\beta_{A} = 0^{\circ} \text{ and } 5^{\circ}$ 

Seat attitudes (Force tests):

$$-60^{\circ} \le s \le 60^{\circ}$$
  $\triangle a_s = 10^{\circ}$   
 $-60^{\circ} \le \beta_s \le 60^{\circ}$   $\triangle \beta_s = 10^{\circ}$ 

# Data


- Three force coefficients f(M, α, β, φ)
- Three moment coefficients f(M, a, β, φ)
- Ten pressures (Hatch jettison  $f(M, \alpha, \beta, \phi)$  characteristics. For comparison with full-scale sled data. Sea level condition only.)
- Ejection trajectory movies
- · Multiple-exposure still photographs.

# Results

- Establish scat/stabilizing-device stability characteristics.
- Establish desired hatch jettlesning characteristics.
- Establish safe escape trajectories.
  - Two-Man Subsonic VTOL Vehicle Cockpit Pod and Separable Nosc Capsules

# Equipment

- Transonic wind tunnel
- one partial airplane model (nose to trailing edge of the wings; wings included). The model is built in two parts: (1) the ejectable escape portion—cockpit pod/separable nose (this section will be a force model); and (2) the remaining portion of the partial model. Modeling must have the capability to adjust the capsule in three positions relative to the airplane to determine the forces on the separable portion while it is in the near-airplane portion of the escape trajectory as shown below. Capability to simulate booster wake (cold flow) must be included.

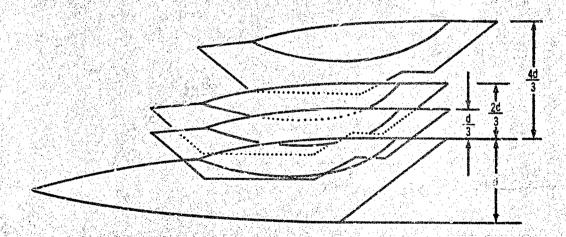

- One full model of carrier aircraft for capsule carrier aircraft separation tests.
- Ten ejectable cockpit pod/separable nose capsules.
- Three configurations of stabilizing devices attachable to both force and ejection models. They will require deployment capability on ejection models but may be fixed during force tests. Thirteen sets of stabilizing devices required. Ten sets will be consumed during ejection tests.
- Two high-speed motion picture cameras. Tunnel-ceiling and tunnel-wall mounted for plan and elevation pictures.
- e Two multiple-exposure still cameras for plan and elevation.

# Test Conditions

- Obtain forces and moments on capsule in free-stream conditions.
- e Ottain forces and moments on capsule in three positions in the near-airplane portion of the escape trajectory. Rocket wake simulation required.
- Eject capsule ten times. The ten ejections will cover a range of speeds and attitudes.
- Obtain carrier aircraft capsule separation characteristics to support follow-on flight test drops of full scale capsule. Drops for separation are at  $\beta_A = 0$  and a  $_A$  appropriate to minimum, intermediate, and maximum carrier speeds.

Test Variables:

 $0.3 \ge M \le 1.1$ 

h = sea level, and scaled 25,000 feet

Capsule attitudes: (free-stream force tests)

$$-60^{\circ} \le 2_{c} \le 60^{\circ}$$
  
 $-60^{\circ} \le \beta_{c} \le 60^{\circ}$ 

Airplane attitudes (airplane capsule force tests and ejection tests)

$$-5^{\circ} \le \alpha_{A} \le 10^{\circ}$$
  $\Delta \alpha_{A} = 5^{\circ}$   $\beta = 0^{\circ}$  and  $5^{\circ}$ 

Data

• Three force coefficients f(14. α, β, Φ)

Capsule alone
Airplane-capsule combination

• Three moment coefficients f(N, α, β, φ)

Capsule alone
Airplane-capsule combination

- Thirty pressures (to compare tunnel results with similar full-scale sled test data to be acquired during track testing).
- · Verification of rocket wake simulation. Weight flow measurement.
- e Ejection trajectory movies.
- Multiple-exposure still photographs.
- Carrier airplane-capsule drop movies and still photographs.
- Carrier airplane-capsule forces and moments.

Results

- Establish capsule/stabilizing device stability characteristics.
- Establish safe escape trajectories.
- Use combination of wind tunnel-test sled data to establish highest possible confidence level in system capabilities in conditions impossible to flight test.
  - c. Three-Man Combined Capability Vehicle Open Ejection Seats and Encapsulated Ejection Seats

Equipment

- Transonic wind tunnel.
- Supersonie wind tunnel.
- One partial airplane model (nose to aft of cockpit area). Model will have three operable hatches and capability to eject seats from all crew stations.
- One force model of ejection open/seat encapsulated seat.
- Twenty ejectable seat models (two scales: sea level and altitude).

- Five configurations of seat stabilizing devices attachable to both force and ejection models. Twenty-five sets of stabilizing devices will be required. Twenty sets to be consumed in ejection tests. Five sets used in development tests.
- Two high-speed motion picture camerus. Tunnel-ceiling and tunnel-wall mounted for plan and elevation pictures.
- Two multiple-exposure still cameras for plan and elevation.

Test Conditions

- Obtain forces and moments on seat model in free-stream conditions.

  Proximity to airplane not required. Develop required stabilizer configuration.
- Eject model seat ten times from critical crew position, and five times from each of the other stations. Ten ejections will cover a range of speeds, attitudes, and two altitudes. Five ejections each from other crew stations at most critical combinations of speed, attitude, and altitude.

Test Variables

Mach No. (M may be scaled for ejection tests.)

Transonic  $0.3 \le M \le 1.1$ Supersonic  $1.9 \le M \le 3.0$ 

Conduct supersonic tests at altitude only. It is assumed that a crew member would not survive above  $V_{\rm C}=600$  knots in an open seat or above  $V_{\rm C}=800$  knots in an encapsulated seat.

• Altitudes

Sea level Scaled 55,000 feet

• Airplane attitudes (ejection tests)

Transonic  $-5^{\circ} \le \alpha_{A} \le 10^{\circ} \triangle \alpha_{A} = 5^{\circ}$   $\beta_{A} = 0$  and 5 Supersonic  $\alpha_{A} = 0^{\circ}$  $\beta_{A} = 0$  and 5

Seat attitudes (force tests)

 $-60^{\circ} \le a_{5} \le 60^{\circ}$   $\Delta \beta_{5} = 10^{\circ}$   $-60^{\circ} \le \beta_{5} \le 60^{\circ}$   $\Delta \beta_{5} = 10^{\circ}$ 

#### Data

- Three force coefficients f(M, α, β, φ)
- Three moment coefficients  $f(M, \alpha, \beta, \phi)$
- Thirty pressures (hatch  $f(M, \alpha, \beta, \phi)$  jettison characteristics. For comparison with full-scale sled data. See level conditions only).
- e Ejection trajectory movies.
- Multiple-exposure still photographs.

#### Results

- Establish sea./stabilizing device stability characteristics.
- Establish desired hatch jettisoning characteristics.
- Establish safe escape trajectories.
  - d. Three-Man Combined Capability Vehicle Cockpit Pod and Separable Nose Capsules

#### Equipment

- Transonic wind tunnel.
- Supersonic wind tunnel.
- One partial airplane model (nose to aft of cockpit capsule/nose separation plane). The model is built in two parts: the ejectable escape portion; cockpit pod/separable nose (this section will be a force model); remaining portion of the partial model. Modeling must have the capability to adjust to capsule in three positions relative to the airplane to determine the forces on the separable portion while it is in the near-airplane portion of the escape trajectory. Capability to simulate booster wake influence (cold flow) must be included.
- Fifteen ejectable capsule models and ten drop models for carrier/capsule separation tests.
- Five configurations of stabilizing devices attachable to both force and ejection models. They will require deployment capability on ejection models but may be fixed during force tests. Fifteen sets of the final configuration of stabilizing devices will be consumed during the ejection tests.
- One full model of carrier aircraft for capsule/carrier aircraft separation tests.

- Two high-speed motion pictures. Tunnel-ceiling and tunnel-wall mounted for plan and elevation pictures.
- . Two multiple-exposure still cameras for plan and elevation.

Test Conditions

- . Ontain forces and moments or capsule in free-stream conditions.
- Obtain forces and moments on capsule in three positions in the near-airplane portion of the escape trajectory. Rocket wake simulation required.
- Obtain carrier aircraft/capsule separation characteristics to support follow-on flight test drops of full-scale capsule.
- Eject capsule 15 times. Ejections will cover a range of speeds and attitudes at two altitudes.

Test Variables

Mach No. (M may be scaled for ejection tests.)

Transonic  $0.3 \le M \le 1.1$ Supersonic  $1.4 \le M \le 3.0$ 

• Altitudes

Sea level Scaled 55,000 feet

Airplane attitudes (ejection and capsule-airplane force tests)

Transonic 
$$-5^{\circ} \le a_{A} \le 10^{\circ}$$
  $\Delta a_{A} = 5^{\circ}$   $\beta_{a} = 0^{\circ}$  and  $5^{\circ}$  Supersonic  $\alpha = 0^{\circ}$   $\beta_{a} = 0^{\circ}$  and  $5^{\circ}$ 

• Capsule attitudes (free-stream (crue tests)

$$\begin{array}{lll} -60^{\circ} \leq \alpha_{\varsigma} \leq 60^{\circ} & \Delta \alpha_{\varsigma} = 10^{\circ} \\ -60^{\circ} \leq \beta_{\varsigma} \leq 60^{\circ} & \Delta \beta_{\varsigma} = 10^{\circ} \end{array}$$

Data

- Three force coefficients  $f(M, \alpha, \beta, \phi)$
- Three moment coefficients f (M, a, β, Φ)
- Carrier airplane-capsule forces and moments.

- e Carrier airplane-capsule drop movies and still photographs.
- e Ejection trajectory movies.
- Multiple-exposure still photos of ejections.
- Verification of rocket wake simulation. Weight flow measurement.

#### Results

- Establish capsule stabilizing device stability characteristics.
- Establish safe escape trajectories.
- Establish feasibility of dropping capsule from a carrier airplane.
- Use combination of wind tunnel-test sled data to establish highest possible confidence level in escape system capabilities in conditions impossible to flight test.
  - e. Four-Man Supersonic Dash Vehicle Open Ejection Seats, Encapsulated Ejection Seats, Cockpit Pod Capsules, and Separable Nose Capsules

Same test programs as for three-man vehicle.

#### 3. DEVELOPMENT AND QUALIFICATION COST SUMMARY

Program costs developed for the twelve escape system concept/vehicle combinations are shown in Table VII. The costs shown as item 1 are the costs for each program as defined by the test outlines (Sec. IV.1). The item 2 costs reflect supplier development costs for the open sjection seat system, the encapsulated seat system, and the cockpit pod and separable nose capsule subsystems.

The test program costs are classified as budgetary and were developed to be used as a trade factor to aid in the selection of suitable escape systems for specific airpiane configurations. To have a basis of establishing some of the item costs, it was necessary to make the following assumptions:

- Each test program was assumed to be a part of an airplane production program.
- The costs are in terms of 1966 dollars.
- The time from program approval to roll-out of the first flight article was assumed to be 30 months.
- No new capital equipment will be required for these programs to record test data.
- Major test parts (viz., cockpit pod capsules, separable nose capsules, airplane nose sections, or airplane structure configuous to separation planes) will be provided from production parts; not built in experimental shops.

Toble VII. Development Cost Sammery

Crew Size	Two-Man	Three-Man	Four-Man
	Subsonic VTOL	Superson'e VTOL	Supersonic Dash
Open Ejection Seat	The second secon	for the commence of the commen	Angel Company Agricultation appearance of the Company and the
Item 1	\$ 1,569,153	\$ 2,033,498	\$ 3,033,589
Item 2	575,840	575,840	575,840
TOTAL	\$ 2,144,996	\$ 2,615,338	\$ 3,609,429
Encapsulated Seat			
Item 1	\$ 2,651,258	\$ 3,140,801	\$ 4,178,412
Item 2	7,500,000	7,500,000	7,500,000
TOTAL	\$10,151,258	\$10,640,801	\$11,678,412
Cockpit Pod Capsule			
Item 1	\$ 6,451,994	\$ 8,108,708	\$13,760,426
Item 2	9,518,975	10,487,750	11,260,137
TOTAL	\$16,000,969	\$18,546,452	\$25,020,563
Separable Nose Capsule			
Item 1	\$ 7,425,528	\$ 8,897,993	\$15,797,007
Item 2	9,632,750	<u>J1,177,750</u>	12,124,127
TOTAL	\$17,058,278	\$20,075,743	\$27,921,134

Item 1 Contractor development and qualification tests

Item 2 Supplier incurred RDT & E - nowecurring cost

## SECTION V

# ESCAPE CONCEPT PERFORMANCE EVALUATION

Section III presents basic escape system performance capabilities with respect to airplane altitude, velocity, and descent angle at the time of escape initiation for twelve representative escape concept/vehicle combinations. This section covers the results of an analysis of the effectiveness of the escape concepts to provide safe escape during certain critical phases of flight. The need for automatic or semiautomatic detection and escape initiation also is analyzed.

The phases of flight considered are VTOL hover and transition, conventional takeoff and landing, low altitude dash, and high speed and altitude. To accomplish the analysis, "check point" emergency escape situations representative of the escape conditions that might occur during each phase of flight were defined. Each escape concept was then compared with the escape conditions to determine the relative effectiveness of each concept. The need for, or benefits of, automatic detection and initiation were evaluated by: 1) considering the time required for a crewman to detect the emergency and to manually initiate escape; and 2) determining the probability of escape initiation in time for successful recovery during the emergency situations or conditions defined for each phase of flight.

#### VTOL HOVER AND TRANSITION

To evaluate the effectiveness of various escape concepts for the VTOL hover and transition flight regime, certain emergency flight conditions representing the type of escape situations that might exist were defined. To provide a basis for establishing the representative emergency flight conditions, a survey of available information pertaining to advanced VTOL technology was made. The following paragraphs summarize information concerning types of VTOL vehicles, propulsion arrangements, control power requirements, methods of control moment generation, stability augmentation requirements, reliability and control redundancy requirements, thrust to weight requirements, and vertical takeoff and transition techniques.

## Types of VTOL Vehicles

VTOL jet aircraft, relative to lift engine grouping, generally fall into one of three categories:

- e A single cluster of lift engines centered around the vehicle center-ofgravity. This arrangement results in minimum engine failure control problems, but engine thrust modulation does not provide an effective means of attitude control.
- Two clusters of lifting engines, fore and aft in the body. This leaves the body in the center of gravity area free for loading fuel or stores. The engine failure pitch moments are high, but the engines may be used for pitch control. In this arrangement the thrust vector of the aft engines may be rotated to the longitudinal direction, thus becoming combination lift and cruise engines.

The special production and respectively to the contract of the Vertex property of the contract of the contract

• Three clusters of lifting engines in a triangular arrangement. This arrangement allows the basic vehicle to use thrust modulation control for all axes, but engine failure moments are high in pitch, roll, and yaw.

The VJ-101C is this type of vehicle.

#### Control Power Requirements

The generally accepted and recommended levels of control power required for VTOL hover flight are:

Pitch ( $\ddot{\theta}$ ) = 0.6 rad/sec<sup>2</sup> Roll ( $\ddot{\phi}$ ) = 1.2 rad/sec<sup>2</sup> Yaw ( $\ddot{\psi}$ ) = 0.4 rad/sec<sup>2</sup>

#### Control Moment Generation

Methods of control moment generation for VTOL hover and transition include the following:

### Engine Thrust Modulation

On vehicles having the lifting engines located at some distance from the center of gravity, thrust modulation provides an effective means of attitude control, provides large control power, and is efficient in the use of engine thrust. The differential-thrust increments of opposing lifting engine clusters are generally scheduled to be of equal magnitude and include both increasing and decreasing thrust changes. When the engines are at full rating, the control increment will be down only. A vertical acceleration coupling exists whenever the increasing thrust modulation increment is not the same magnitude as the decreasing increment on the opposing engine. Pitch control by use of thrust modulation requires no additional equipment or weight to the vehicle other than provisions for combining pitch differential thrust signals with the collective thrust signals. For effective roll control by thrust modulation, Lae lifting engines should be located at the wing tips or at some distance out from the body. Success of thrust modulation for control depends on the response and resolution characteristics of the engine to control inputs. Lift engines, because of their low weight and inertia, have rapid response times. The heavier cruise engines have substantially longer response times.

#### Engine Bleed Reaction Controls

Reaction control systems utilize engire bleed ducted to reaction control nozzles located at the wing tips for roll control, or located in the tail and nose for pitch control. Reaction control systems are superior to thrust modulation systems in response and resolution of control moments. Efficient use of engine thrust is achieved for roll control systems because larger moment arms are possible. Reaction systems require large volume and weight for ducting. Since reaction systems extract energy from the lift engine, an effective loss of thrust results when control power is applied. The thrust loss associated with average control usage is dependent on whether the system is designed as a demand or continuous bleed system.

#### Differential Engine Vectoring

This means of control is used in the VI-101C in conjunction with thrust modulation for pitch and roll control. Lateral rotation of cruise engines for yaw control is considered satisfactory for some installations.

## Engine Bleed and Burn Reaction Control

Bleed air thrust may be augmented by the introduction and burning of fuel. However, the use of burners increases the complexity of the system and adds weight at airc aft extremitles. This increases rotational inertias and therefore control force requirements.

#### Fans

The use of fans for augmenting bleed thrust offers a considerable rainetion in bleed air requirements and minimizes engine thrust losses. These systems, however, pose a weight, volume, and installation problem.

#### Separate Gas Generators and Propellant Fueled Rockets

These methods of providing control introduce complexity and logistic problems and are not considered appropriate for use in VTOL vehicles.

## Stability Augmentation

VTOL vehicles without stability nugmentation respond to external moments with a constant angular acceleration. Flying an airplane with these characteristics is extremely difficult and under operational conditions probably impossible. The simplest stability augmentation system is a rate-damped system that modifies the airplane response to produce angular rate proportional to control or disturbance input. Although experienced pilots accept rate-control systems and are able to control havering airplanes having rate damping only, flight conditions must be nearly ideal. Hying a rate-control system requires continuous pilot attention and leaves him little time for other tasks during the VTOL phase of flight. For flying under operational conditions, including allweather and gusty air conditions, rate-control systems are not satisfactory in pitch and roll. An attitude stability augmentation system, that maintains vehicle attitude proportional to stick deflection, has a number of advantages over a rate system because it reduces pilot control effort significantly and improves hover accuracy. Simulator tests have indicated that an attitude system will provide satisfactory pitch and roll control with the recommended available control power levels listed in the preceeding paragraphs. A rate control system is satisfactory for yaw axis control.

#### Thrust to Weight Requirements

VTOL control systems extract energy from the installed thrust capability and any demand on the reaction control system represents an effective decrease in the thrust available for lift. Estimates of control demands for vertical control, continuous control requirements, center-of-gravity trim, steady wind, and static suckdown indicate that a total installed thrust-to-weight

value of about 1.18 probably will be required for future VTOL aircraft.

Further, large discrete maneuvers, involving abrupt maximum amplitude control inputs to thrust modulation control systems, will normally result in a momentary loss of effective thrust-to-weight to a value significantly less than 1.0.

# Control System Redundancy

VTOL vehicles require stability and control augmentation for mission success and flight safety. This leads to the need of an extremely reliable flight control system, requiring redundant or fail-operational systems. This has been proved by crashes of all previous VTOL aircraft. Advanced VTOL niveraft will probably require triple redundancy for all flight safety critical control system elements, being fail-operational for all possible first failures and fail-safe for most probable dual failures.

## Vertical Takeoff and Transition Techniques

Vertical takeoff and transition techniques and procedures will vary depending on particular vehicle geometric configurations, handling qualities, fuel consumption, and elapsed time considerations. However, the general procedure is to bring all engines to full power with thrust pointing vertically. After the vehicle has reached the desired altitude, transition is started and the flight pain is controlled by a smooth forward rotation of the thrust vector angle. Vehicle attitude is controlled during hover by thrust modulation, engine bleed reaction systems, differential engine vectoring, or combinations thereof. During transition, control is provided by engine control and aerodynamic control surfaces. Retransition for landing is accomplished by reducing engine thrust to idle, during wing borne flight, with the thrust vector angle at zero. Thrust rotation is initiated and gradually increased to the maximum deflection angle (vertical). Engine thrust is increased to maintain the desired flight path until the longitudinal velocity becomes zero. The vertical landing is then completed.

#### a. Escape Conditions

Due to the large number of possible variations in future VTOL vehicle configurations and designs as discussed in the preceding paragraphs, as well as unforseen changes in the rapidly advancing VTOL technology, it is not possible to define precise and complete escape requirements that would be appropriate for all future VTOL vehicles. However, if certain standards relative to flight safety critical areas are adhered to in future VTOL designs, it is possible to define some specific limiting escape conditions that will provide a suitable basis for escape concept evaluations and comparisons.

Experience with past VTOL experimental vehicles has resulted in certain design philosophies with respect to flight safety critical areas involving vehicle geometry and control requirements. This involves engine placement and grouping a climinate excessive uncontrollable pitch or roll resulting from engine failure, stability augmentation, and highly reliable redundant control systems.

Emergency escape situations resulting from proposition system failures were selected as representative of escape conditions that might be expected during hover or transition flight. A detailed analysis was made of escape conditions for engine failures throughout hover and transition flight. The basis and results of the analysis are presented in the following pages of this section.

The most critical possible control system failure would be one in which the maximum available control power is continually applied toward hard-over pitch or roll. This would result in a tumbling condition that would not allow the successful use of any realistically designed escape system. Mowever, the probability of this critical control system failure occurring would be extremely rare in view of stability augmentation and control system reliability requirements for VTOL vehicles. A more probable control system failure would be a fail-safe or passive situation in which positive control may be lost, but adverse control or external moments would be translent only. A detailed analysis of possible control system failures and resulting escape conditions was not accomplished. For this study, it is presumed that future VTOL vehicle designs will be such that the most probable control system failures will not result in escape situations significantly more severs than those defined by the engine failure analysis.

Prevailing philosophy concerning flight safety for future operational VTOL jet aircraft calls for favorable engine placement relative to the center-of-gravity, multiple engines per cluster, and stability and control augmentation that will automatically compensate for an engine failure by modulating thrust of opposing engines. Thus, minimizing adverse pitch and roll and maintaining safe escape attitudes in the event of an engine failure. The ideally designed vehicle would crash in a controlled level attitude following an engine failure during hever or transition. Figure 112 shows the escape conditions that will exist for the maximum stability case engine failure at altitudes from zero to 500 feet during hover flight. For this case it was assumed that a minimum thrust-to-weight ratio of 0.5 for the trimmed condition following engine failure.

VTOL vehicle behavior following a rengine failure is dependent upon the vehicle mass and moments of inertia; geometric arrangement of the lifting engines; distance of engines from vehicle cg; number of engines in each cluster; type of control and stability augmentation systems; engine response; reaction control system response; vehicle aerodynamic lift and control characteristics; installed thrust-to-weight ratio; takeoff, landing and transition techniques; pilot emergency procedures; and vehicle flight conditions, power settings and thrust deflection angle at the time of engine faiture.

To establish boundary escape conditions for engine failure situations in VTOL vehicles in general, certain minimum vehicle design considerations relative to flight safety critical areas were prescribed. These design considerations were based on current and projected VTOL technology and design philosophies, and are believed to realistically represent the critical escape conditions that are most likely to occur.

tions that collectively describe a hypothetical VTOL vehicle design continuous that collectively describe a hypothetical VTOL vehicle able to show the boundary escape conditions for hover and treasition flight. Figure 118 above the propulsion and control arrangement representing the minimum requirements vehicle which is controlled fairing haver by engine thrust medulation in pitco, and by engine bleed reaction control in roll.

#### Number of Lifting Engines

A minimum of two lifting engines in each cluster is required to assure pitch control and to maintain acceptable escape attitudes in the event of an engine failure. The minimum engine requirements are shown in Figure 113 and consist of two forward lift engines and two aft cruise engines of which the thrust is deflected vertically to provide lift for takeoff and landing.

# Distance of Lifting Engines from Vehicle Center-of-Gravity and Mass Moment-of-Inertia Considerations

The relationship between engine thrust, location relative to the eg, and rolling and pitching moments of inertia shall be such that the vehicle response to a single engine failure will not exceed ±0.8 rad/sec<sup>2</sup> in pitch or ±1.2 rad/sec<sup>2</sup> in roll.

#### Engine Response Time

A ramp thrust decay or buildup of 3.0 seconds for a thrust change of 80 percent of maximum for both lift and cruise engines was assumed for engine modulation pitch control.

#### Reaction Control Response Time

A 0.3 second response time for application of full roll contro! power was used for the minimum requirements vehicle engine bleed reaction control system.

## Thrust-to-Weight

The total installed thrust-a weight, exclusive of demands of the engine bleed reaction control system, shall not be less than 1.0 at maximum power for steady state trim conditions.

# Stability Augmentation

The minimum requirements vehicle shall be provided with a stability augmentation system which, through the thrust modulation pitch control system and the engine bleed reaction control system, will automatically act toward achieving a stable level attitude in the event of engine failure or the application of other external moments.

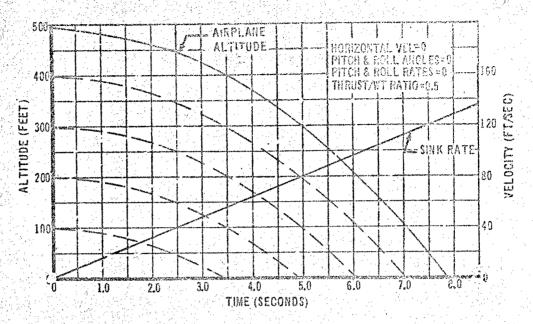


Figure 112. Escape Conditions for Engine Failure During VTGL Hover Flight -Flat Attitude, Maximum Stability Case

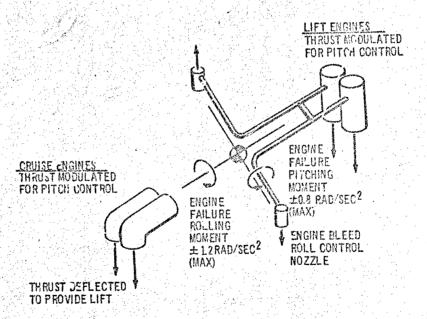


Figure 113. VTOL Vehicle Propulsion and Control Arrangement

### Hover Control Power

The maximum control power available for roll control during hover is 1.2 rad/sec<sup>2</sup>. This is the recommended stick control authority needed for hover flight and is equal to the maximum engine failure response. The recommended stick authority for pitch control is 0.6 rad/sec<sup>2</sup>. However, the maximum pitch control lower available by 80 percent thrust modulation for the minimum requirements vehicle is 1.28 rad/sec<sup>2</sup>.

#### Aerodynamic Control

Figure 114 is a plot of aerodynamic pitch and roll control power available throughout the transition. These values were based on a normal aerodynamic control availability of 0.4 rad/sec<sup>2</sup> in pitch and 1.35 rad/sec<sup>2</sup> in roll at the transition completion velocity (wingborne flight) of 240 feet per second EAS.

## Aerodylamic Lift

Aerodynamic lift-to-weight ratio as a function of transition velocity and angle of attack is shown in Figure 115. This is based on a lift-to-weight ratio of 1.0 at the minimum wingborne velocity of 240 feet per second EAS.

# Transition Technique

The transition technique used for defining the vehicle flight conditions for engine failure analyses is to rise vertically to the desired transition altitude. Transition may be started at any altitude from ground level to 500 feet and may be accomplished in level or ascending flight. Cruise engine thrust is pointed vertically at the start of transition and is gradually rotated to the horizontal direction at the completion of transition. The total thrust-to-weight ratio is initially 1.0 (0.5 for cruise engines plus 0.5 for lift engines at the start of transition). Cruise engine T/W is maintained constant through the transition, and lift engine T/W is decreased as required to maintain trim and the desired equilibrium flight conditions. The VTOL transition schedule for a level flight transition is shown in Figure 118.

Based on the previously described minimum requirements VTOL vehicle characteristics, boundary escape conditions were calculated for cruise and lift engine failures at various check points throughout the transition envelope. The escape condition check points are shown in Figure 117 and are as follows:

Velocity Ft/Sec Knots	Percent of 'q' Required For Wingborne Flight
San Armania de Caración de Car	To the place of the second street with the party of the party of the second street of the party
0 0	0.0
<b>85</b> 50 50	12.5
120 71	25.0
170 100	50.0
240 142	100.0

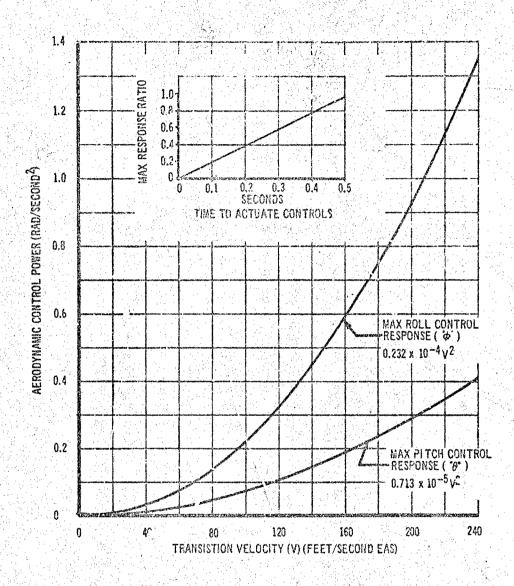


Figure 114. Aerodynamic Control Available During VTOL Transition

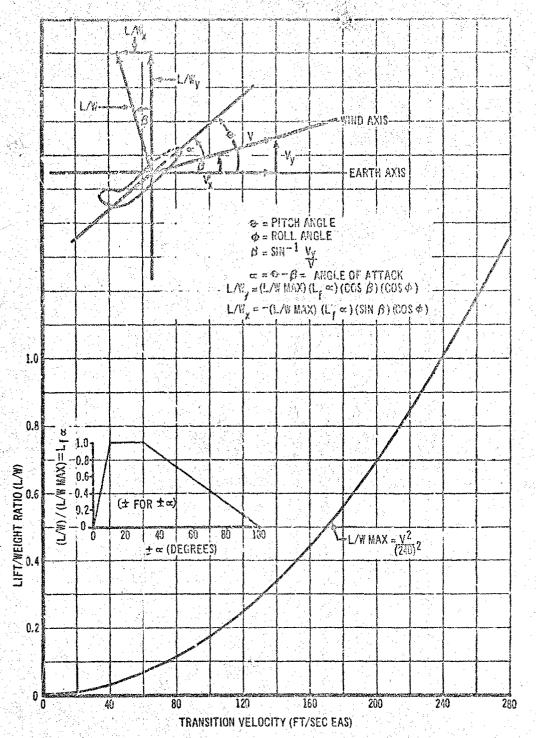


Figure 175. Aerodynamic Lift Available During VTOL Transition

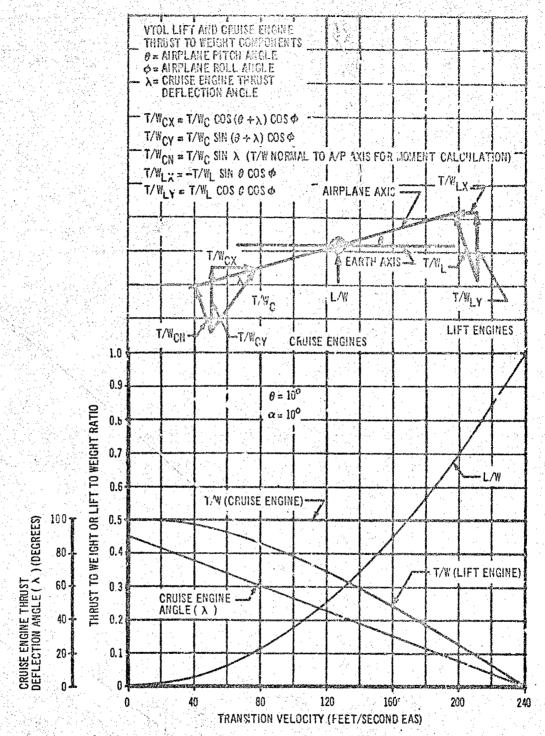


Figure 116. VTOL Vehicle Transition Schedule

Figure 117. VTOL Engine Failure Escape Condition Check Points


For the 85 ft/sec check point, the escape conditions were calculated with cruise engine thrust vector being returned to vertical, following engine failure, to maintain the maximum vertical T/W ratio. For the 120 ft/sec and higher velocity check points, it was assumed that an attempt to complete transition and continue to fly would be made. For these conditions the cruise engine thrust vector was rotated to the horizontal direction (vehicle-body axis) to provide maximum acceleration and chance of vehicle recovery. Figures 112 and 119 show the pitch control ergine thrust modulation, cruise engine thrust vector angle, and engine bleed roll control moments versus time following cruise and lift engine failures at 85 ft/sec during transition. These curves are typical of the data developed for calculation of the escape conditions for each check point.

Figures 126 through 126 present the boundary escape conditions in terms of vehicle altitudes, pitch angles, roll angles, horizontal volocities and sink rates for engine failures at points in the transition envelope from zero to 500 test altitude and zero to 240 ft/sec velocity.

# b. Escape Concept Effectiveness

To evaluate the effectiveness of the various escape concepts for the VTOL hover and transition flight regime, an escape concept effectiveness index was established. The method devised for determining the relative effectiveness of the escape concepts for each of the emergency situations defined in the preceding section, is illustrated in Figure 127. The "airplane altitude" lines on the figure represent the loss of altitude versus time for similar emergency situations originating at different altitudes (100 foot increments) from zero to 500 feet. The altitude versus time limit for seat or capsule separation, required for successful recovery, was established from special computations based on the escape concept configurations defined in Section III. These limits were determined by computing the altitude required for recovery for the specific horizontal velocity, sink rate, pitch and roll angle conditions existing at various times following the start of an emergency. The "escape initiation required" line defines the points on the airplane versus time curves where escape must be initiated for successful recovery of the entire crow. The time lag between initiation and separation takes into account pre-ejection (or preseparation) functions and ejection sequencing requirements for open and encapsulated ejection seats. The time allowance for preseparation functions for the capsule systems is 0.2 second. For the open ejection seat concept, the time required from initiation until the last seat clears the vehicle is 1.06 seconds for the two-man vehicle and 1.56 seconds for the three-man vehicle. For the encapsulated ejection sear concept, 2.15 seconds are required for the two-man vehicle and 2.65 seconds for the three-man vehicle.

For the escape concept effectiveness index determinations it was assumed that the VTOL emergency situations (engine failures) might occur at any altitude from zero to 500 feet, and that escape may be initiated at any time from the start of the emergency to ground impact. Therefore, the area to the left of the escape initiation line (Figure 127) represents the altitude-time spectrum where initiation would result in successful escape. The area to the right represents the unsuccessful escape initiation area. The ratio of the successful escape initiation area to the total area provides an index or measure of the relative effectiveness of the escape concepts.

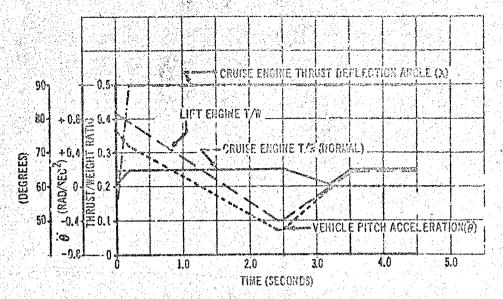

$$\begin{split} \mathcal{B} &= \frac{0.8}{0.25} \quad \text{(T/WL} - \text{T/W}_{CN}) \\ \text{T/WL- T/W FOR LIFT ENGINES} \\ \text{T/W}_{CN} &= \text{CRUISE ENGINE} \\ \text{NORMAL T/W} \\ \text{COMPONENT} \end{split}$$

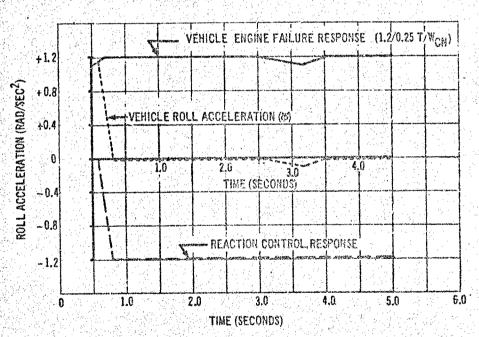


Figure 118. YTOL Vehicle Thrust, Thrust Deflection Angle, Pitching Moments and Rolling Moments Following Cruise Engine Failure at 85 Ft/Sec EAS

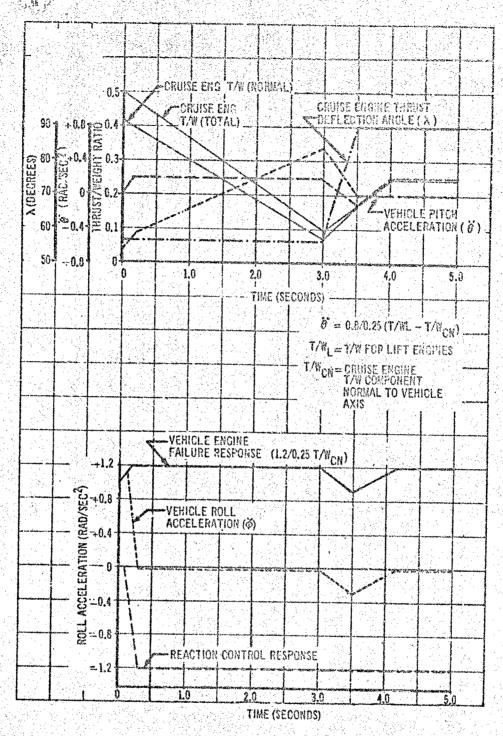


Figure 119. VTOL Vehicle Thrust, Thrust Deflection Angle, Pitching and Rolling Moments Following Lift Engine Failure at 85 Ft/Sec EAS

Figure 120. Escape Conditions for Engine Failure During VTOL Mover Flight

ALTITUDE (FEET)

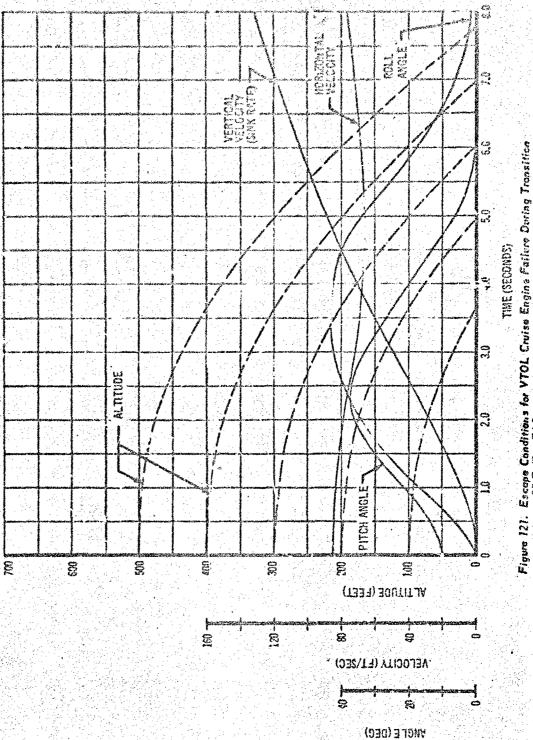


Figura 121. Escape Conditions for VTOL Cruise Engine Failure During Transition at 65 Ft/Sec EAS

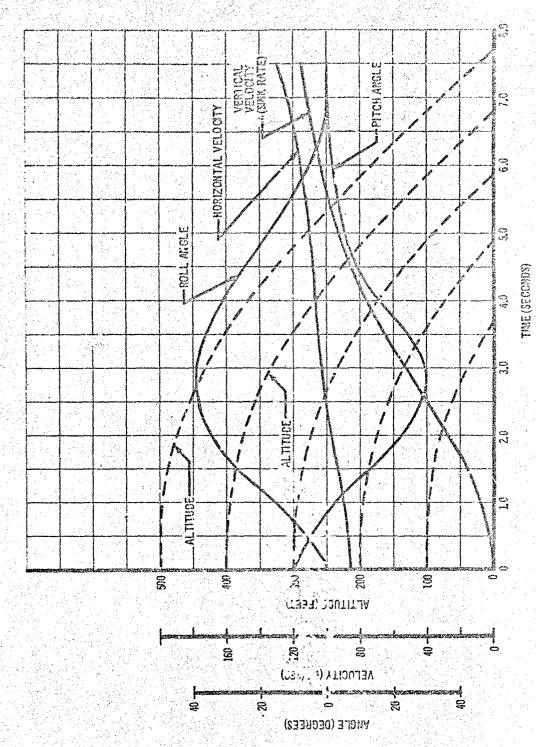


Figure 122. Exceps Candilions for VTOL Liff Engine Failure During Transition at 35 Ft/Sec EAS

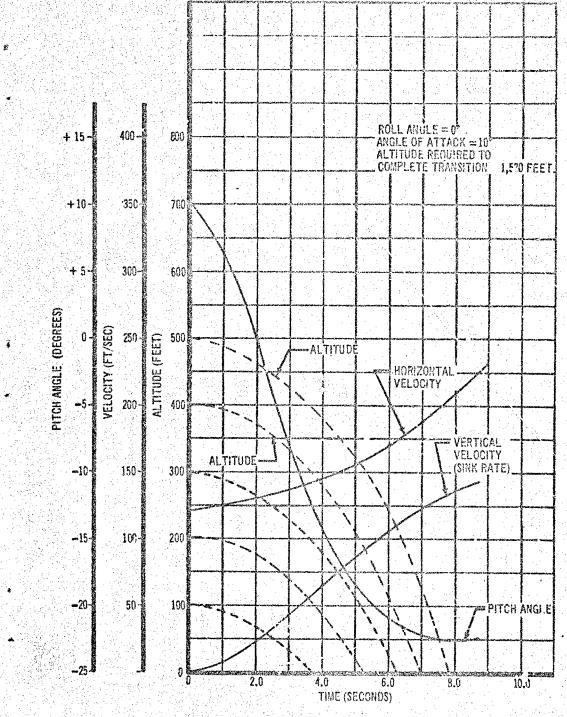


Figure 123. Escape Conditions for VTOL Cruise Engine Failure During Transition at 120 Ft/Sec EAS

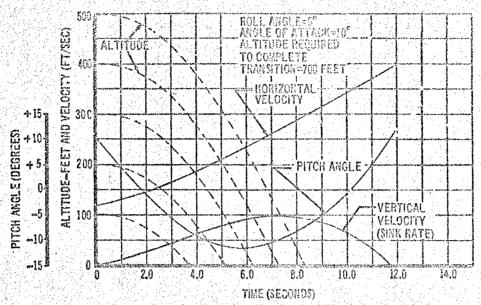


Figure 124. Escape Conditions for YTOL Lift Engine Failure During Transition of 120 Ft/Sec EAS

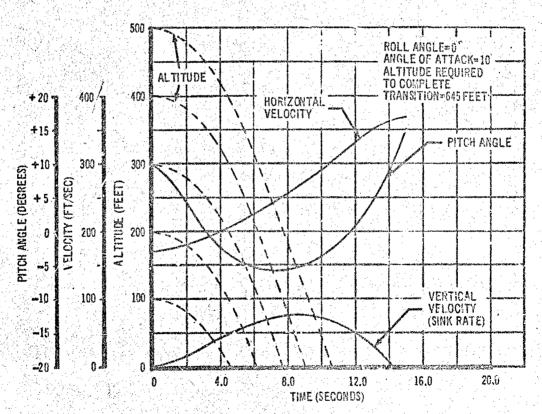


Figure 125. Escape Conditions for VTOL Cruise Engine Failure During Transition at 170 Ft/Sec EAS



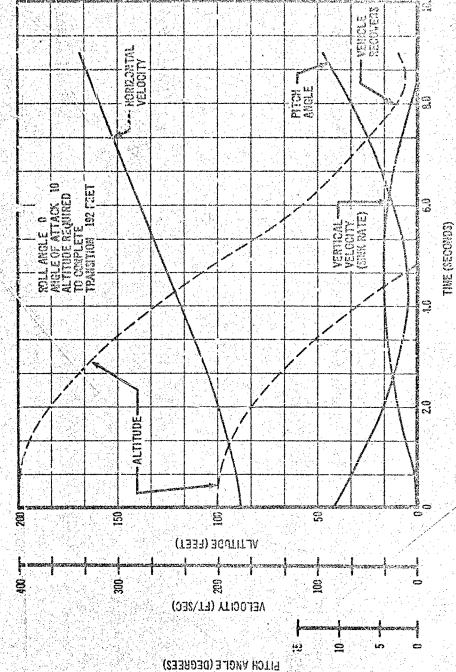


Figure 126. Escape Conditions for VTOL Lift Engine Failure During Transition at 170 Ft/Sec EAS

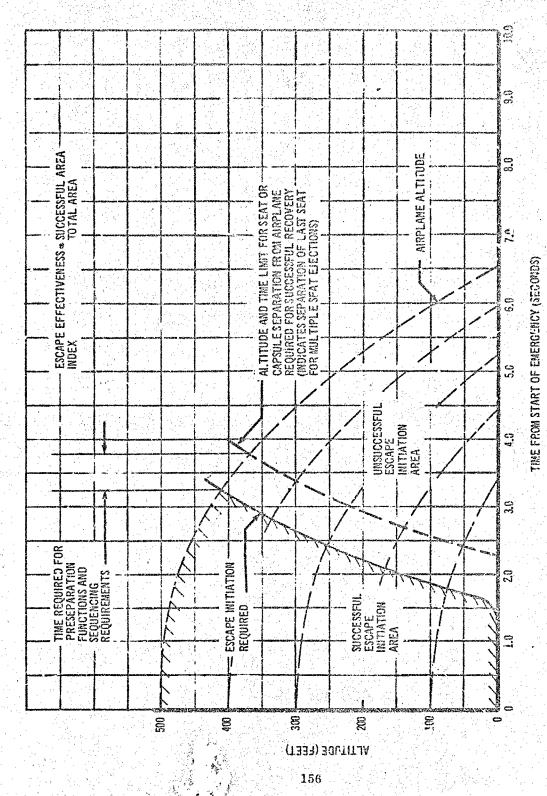


Figure 127. Illustration - Method L. Determining Escape Effectiveness Index

Escape concept effectiveness indexes were determined for each escape concept for two-man and three-man VTOL vehicles. The escape effectiveness determinations were made for cruise and lift engine failure situations occurring at check points throughout the VTOL transition envelops as shown on Figure 117.

Figures 128 through 158 show the curves for escape concept effectiveness index determinations for the two-man vehicle. Figures 128, 129 and 130 show the effectiveness of the escape concepts for the special maximum stability (controlled flat attitude) case for any single engine failure situation as defined in Figure 112. Figures 131 through 138 show the effectiveness of the escape concepts for the boundary scape conditions for cruise and lift engine failures during bover flight defined on Figure 120. Figures 139 through 144 show the escape concept effectiveness for cruise and lift engine failure situations during transition at 85 ft/sec EAS as defined in Figures 121 and 122. Figures 145 through 150 show the escape concept effectiveness for cruise and lift engine failure situations at 120 ft/sec transition velocity as defined in Figures 123 and 124. Figures 151 through 156 show the escape concept effectiveness for the engine failure situations at 170 ft/sec as defined on Figures 125 and 126.

The escape concept effectiveness index versus transition velocity is shown for each escape concept for two-man subsonic VTOL vehicle cruise engine failures in Figure 157, and for lift engine failures in Figure 158. These graphs also show the mean effectiveness index for the entire VTOL transition envelope for each concept.

Figures 159 through 189 present the escape concept effectiveness data for VTOL hover and transition engine failure situations for the three-man combined capability vehicle.

Table VIII summarizes the escape concept effectiveness data for both vehicles.

# c. Automatic Detection and Initiation Evaluation

During VTOL hover and transition flight, the time required for the pilot to detect and verify an emergency situation, make the decision to initiate escape, and actuate the escape control is a critical function of the escape process. To evaluate the need for, or benefits of, an automatic or semiautomatic emergency detection and escape initiation system, an analysis was made to determine the probability of escape initiation in time for successful escape during hover and transition flight emergencies for manual and for semiautomatic initiation.

To provide a basis for the analysis, normal distribution curves for escape initiation, relative to time from the start of an emergency situation, were constructed. Figures 190 and 191 show the estimated normal distribution curves for manual and semiautomatic detection and initiation.

Human engineering data relative to the time required for detection, decision, and reaction that are directly applicable to the escape problem are not available. However, data from References 1, 2, and 3 were compiled and

used as a basis for developing the normal distribution curves. These curves are believed to provide a reasonable estimate of escape response times, with the possibility of being to some degree "optimistic" since they do not account for personal equipment (i.e., pressure suits, gloves, restraint systems, etc.)

For the manual detection and initiation case, the pilot would have normal instruments to monitor airplane subsystem and system status, plus caution and master warning lights. After an initial indication of trouble, the pilot would be required to make an emergency scan of subsystem displays and airplane flight conditions, make multiple assessments, and the decision to eject. Table IX lists mean times, ranges, and standard deviations for the various response and reaction elements, along with the combined times that were used in defining the normal distribution curve.


The semiautomatic system, status assessment, logic, decision, and "eject" display to the pilot is computerized and fully automatic. The pilot is trained and conditioned to have full confidence in the system and approaches near-conditioned reflex oscape initiation performance. The pilot manually initiates ejection only. Table X lists the time data and basis for the normal distribution curve of Figure 191.

The two-man subsonic YTOL vehicle open ejection seats and cockpit pod capsule escape concepts were selected as a basis of the automatic detection and initiation evaluation. The escape conditions were considered to be those defined in Figures 120 through 126 for cruise and lift engine failure situations occurring at different points in the transition envelope from hover to 240 ft/sec EAS wingborne flight, and from ground level to 500 feet.

Figure 192 illustrates the method used for determining the probability of escape initiation in time for nuccessful recovery relative to the vehicle altitude at the start of the emergency situation. This particular example is for the two-man vehicle cockpit pod capsule for escape following a cruise engine failure during transition at 85 ft/sec EAS, and corresponds to the conditions shown in Figure 141. The airplane altitude lines (Figure 192) indicate the loss of altitude with time from the start of emergency situations originating at altitudes from ground level to 500 feet (in 100-feet increments). The intersections of the airplane altitude lines with the escape initiation line indicates the time allowable for initiation of successful escape for each originating altitude situation. The probability that escape will be initiated in time to be successful is determined by taking the ratio of the area under the escape initiation normal distribution curve to the left of the safe escape time (Hashed Lines) to the total area under the curve.

Utilizing a digital computer program involving numerical integration procedures, the probability of successful escape initiation versus altitude at start of the emergency was determined for each escape concept and emergency situation for manual and semiautomatic initiation. These data were determined for engine failure situations occurring at transitional velocities of zero (hover), 85, 120, 170, and 240 ft/sec, and are shown plotted for the two-man vehicle open ejection seats for cruise engine failures in Figure 193, and for lift engine failures in Figure 194. Figures 195 and 195 show the curves for the two-man vehicle cockpit pod capsule escape concept.

Figures 197 through 200 are plots of the probability of successful escape versus vehicle transition velocity for cruite and lift engine tailures for the two-man vehicle open ejection seat and cockpit pod escape concepts. These curves were derived from the data in Figures 193 through 195 by determining the mean probability of initiating successful escape for all engine failure situations occurring between zero and 500 feet for each transition venecity condition considered. Also indicated on these Figures and summarized in Table XI is the overall mean probability of successful escaps for cruise and lift engine failures occurring throughout the entire V FOL hover and transition velocity—altitude envelope.

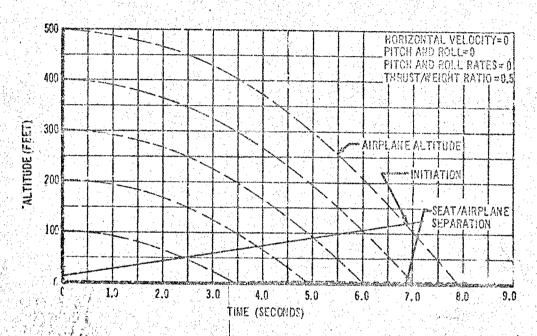

F jure 728. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitude VTOL.
Hover Flight Engine Failure - Maximum Stability Case

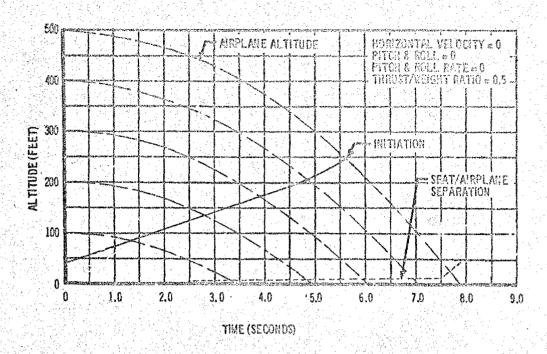


Figure 129. Two-Men Encapholoied Ejection Souts Minimus Escape Altitudes VTOL Hover Flight Engine Failure - Maximum Stability Caso

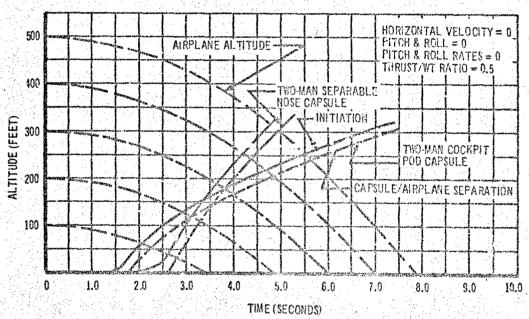


Figure 130. Two-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum:
Escape Altitude VTOL Hover Flight Engine Failure - Maximum
Stability Case

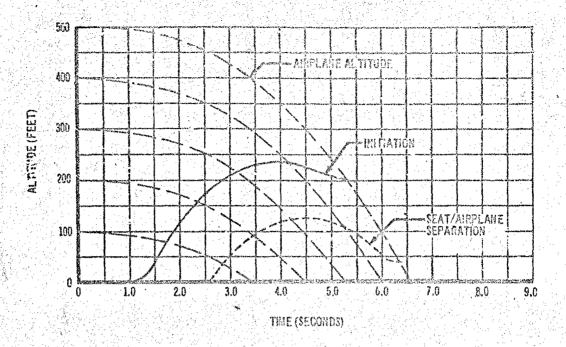


Figure 131. Two-Man Vehicle Open Ejection Scats Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure

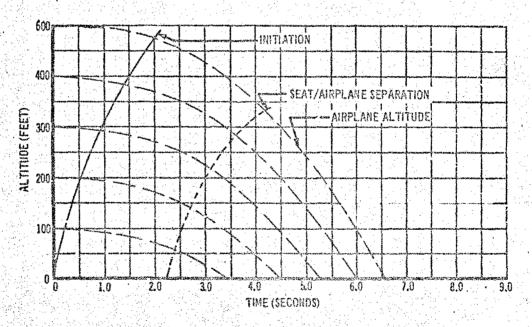


Figure 132. Two-Mar Vehicle Encapsulated Ejection Scats Minimum Escape Altitude
VTOL Hover Flight Cruise Engine Failure

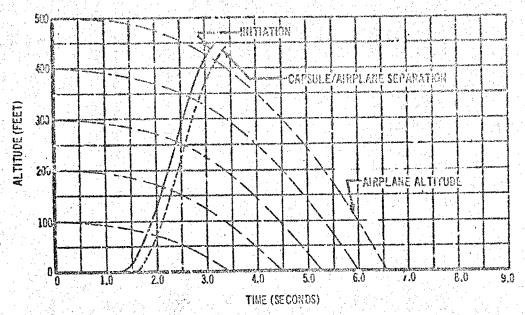


Figure 133. Two-Man Vehicle Cockpit Pad Capsule Minimum Escape Altitude YTOL Hover Flight Cruise Engine Failure

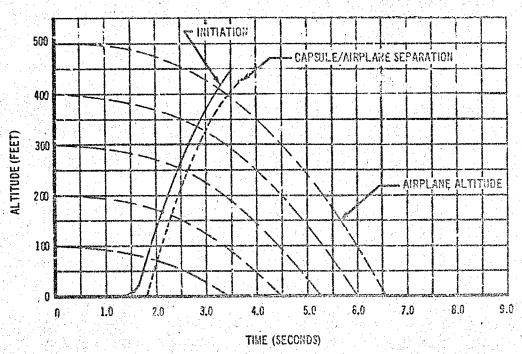


Figure 134. Two-Man Vehicle Separable Nose Capsule Minimum Escape Alliqude VTOL. Hover Flight Cruise Engine Failure

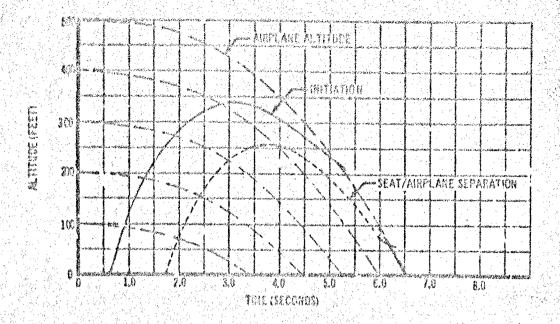


Figure 135. Two-Man Vehicle Open Ejection Seats Minimum Escare Aliituda YTOL. Havat Flight Lift Engine Falluta

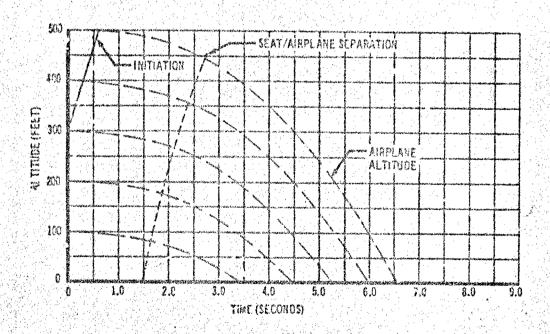


Figure 136. Two-Man Vahicle Encapsulated Ejection Seats Minimum Exceps Alsitud, VTOL Hover Flight Life Engine Failure

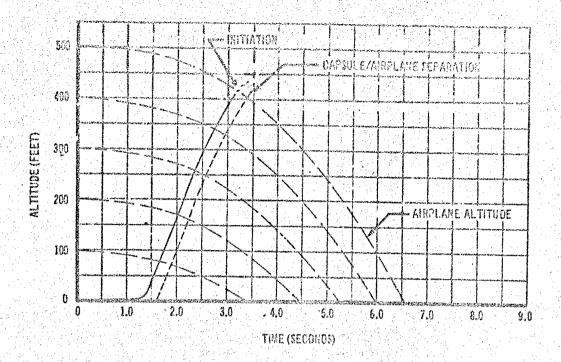


Figure 137. Two-Man Vehicle Cockpit Pod Capsule Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure

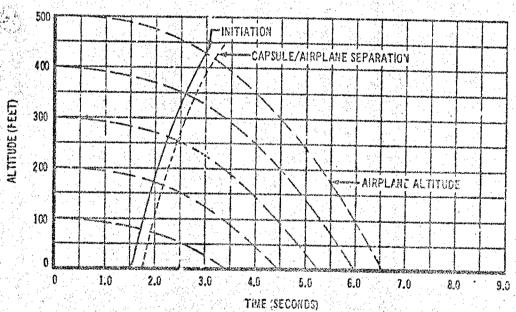


Figure 138. Two-Man Vehicle Separable Nose Capsule Minimum Escape Altitude V701. Hover Flight Lift Engine Failure

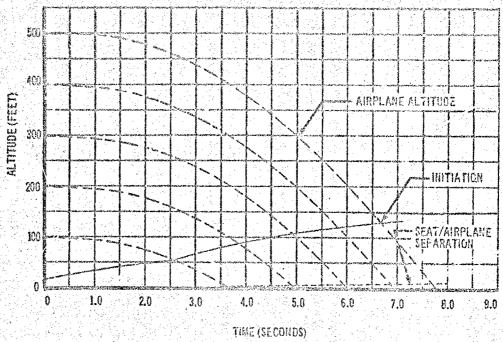


Figure 139. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 85 F1/Sec Transition Cruise Engine Pailure

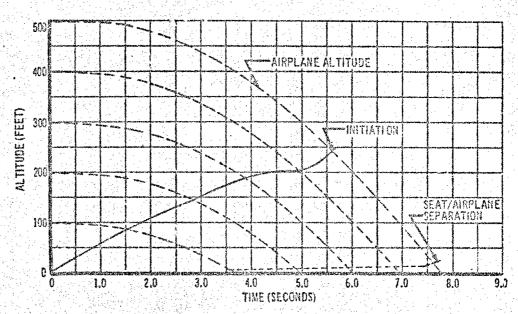


Figure 140. Two-Man Vehicle Enconsulated Ejection Seats Minimum Escape Altitudes 85 Ft/Sec Transition Cruise Engine Failure

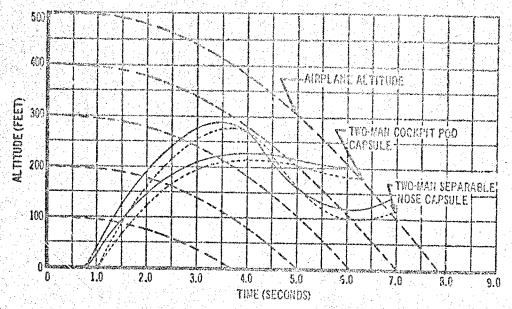


Figure 141. Two-Man Vehicle Cockett Pod and Separable Nose Copsule Minimum Escape Altitudes 85 Ft. Sec Transition Cruiso Engine Failure

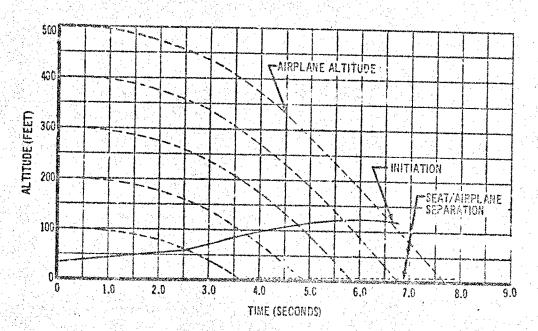


Figure 142. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure

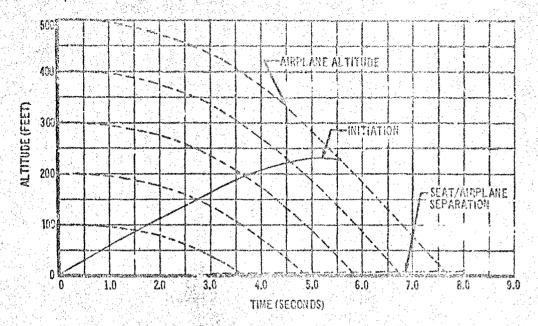


Figure 143. Two-Man Vehicle Encapsulated Ejection Scats Minimum Escape
Altitude 85 Ft/See Transition Lift Engine Fallure

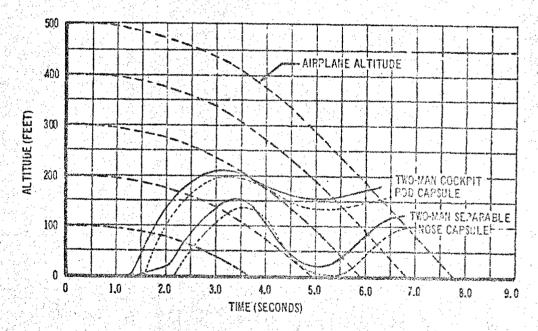


Figure 144. Two-Mon Vehicle Cockpit Pod and Separable Nose Co. sule Minimum Escape Allitude 85 Fi/Sec Transition Lift Engine Failure

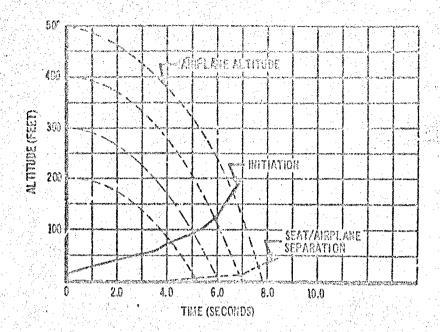


Figure 145. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitudus 120 Ft/Sec Tra seltion Cruise Engine Fellure

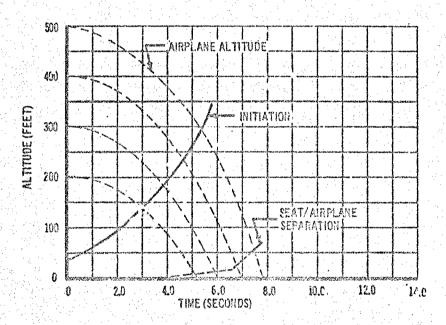


Figure 146. Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes
120 Ft/Sec Transition Cruise Engine Follure

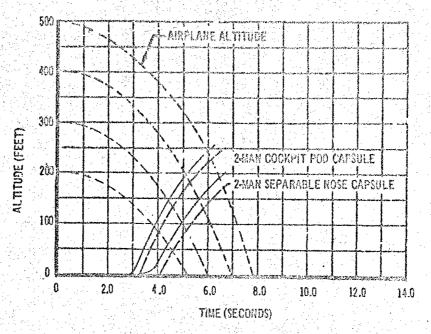


Figure 147. Two-Man Vehicle Cockpit Pod and Separable Hose Censule Minimum Escape Altitudes 120 Ft/Sec Transition Cruise Engine Failure

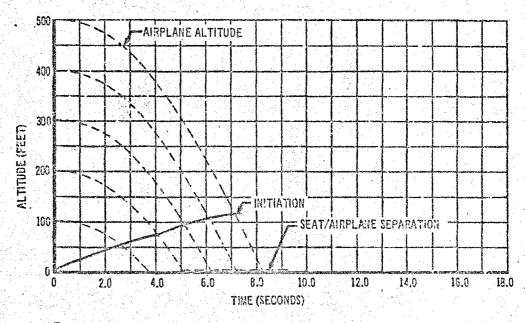


Figure 148. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Lift Engine Failure

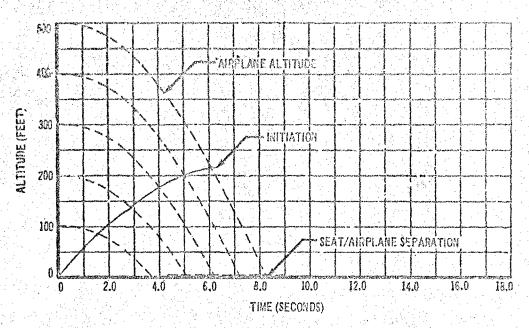


Figure 1/9. Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Lift Engine Failure

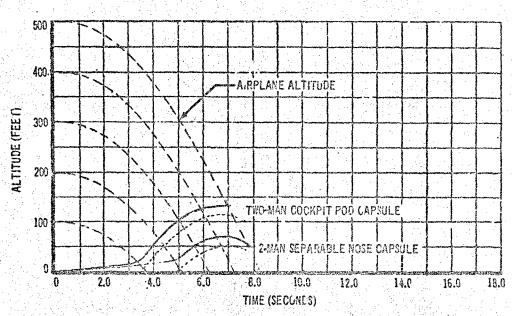


Figure 150. Two-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape
Altitude 120 Ft/Sec Transition Lift Engine Failure


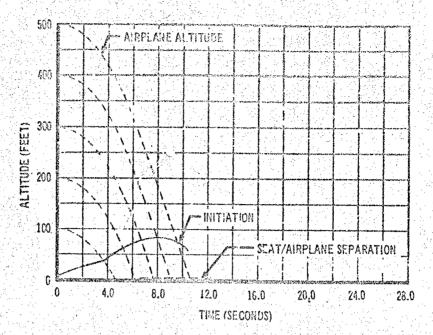


Figure 151. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 170 Ft/Sec Transition Cruise Engine Failure

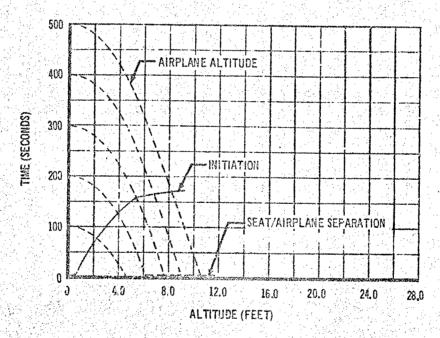

Firms 152 7wo-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitudes
170 Ft/Sec Transition Cruise Engine Failure

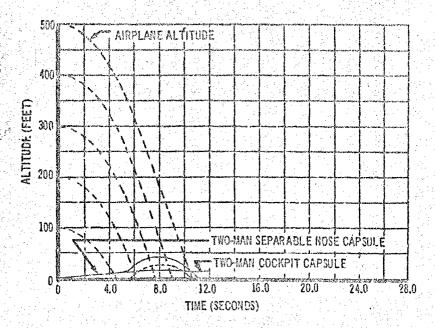


Figure 153. Two-Man Vehicle Cockpit Pod and Separable Mose Capsule Minimum Escape Altitudes 170 F1/Sec Transition Cruise Engine Failure

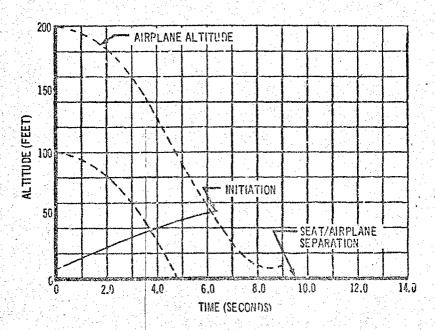


Figure 154. Two-Man Vehicle Open Ejection Seats Minimum Escape Altitude 170 Ft/Sec Transition Lift Engine Failure

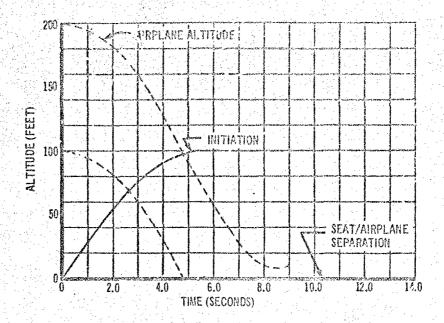


Figure 155. Two-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude 170 Ft/Sec Transition Lift Engine Follure

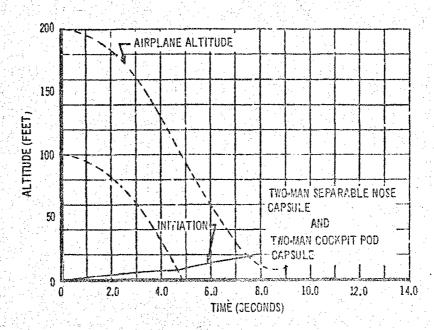


Figure 156. Two-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitude 170 Ft/Sec Transition Lift Engine Failure

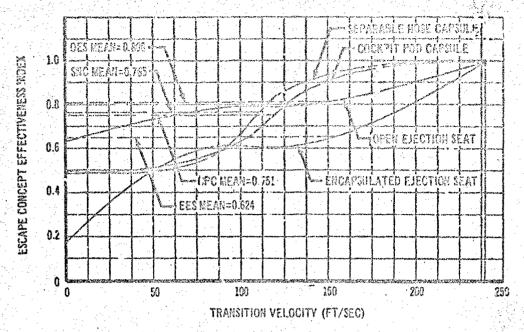


Figure 157. Two-Man Subsanic VTGL Vehicle Cruise Engine Failure Duting Transition Escape Concept Effectiveness Index

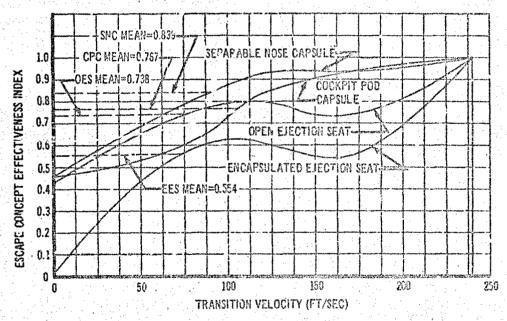


Figure 158. Two-Men Subsonic YTOL Vehicle Life Engine Failure During Transition Escape Concept Effectiveness Index

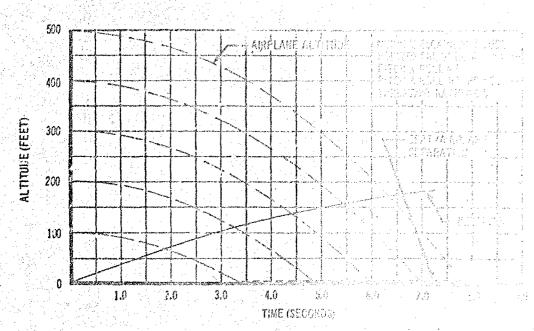


Figure 159. Three-Man Vehicle Open Ejection Scata Maximum Escape Alabaki VTOL Hover Flight Engine Failure - Maximum Stability Care

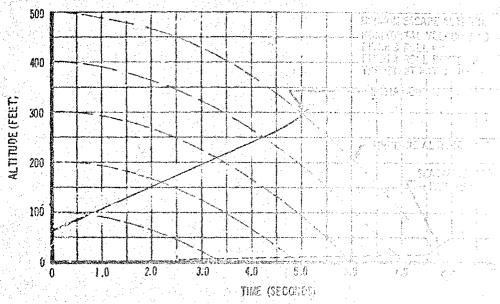


Figure 160. Three-Man Vehicle Encapsulated Ejection Series Minimum Estate Altitude VTOL Hover Flight Engine Factor - Non-series Estate y s

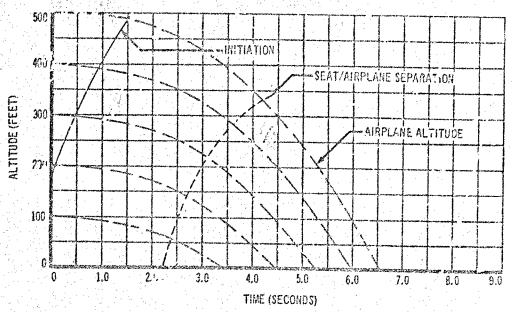


Figure 163. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure

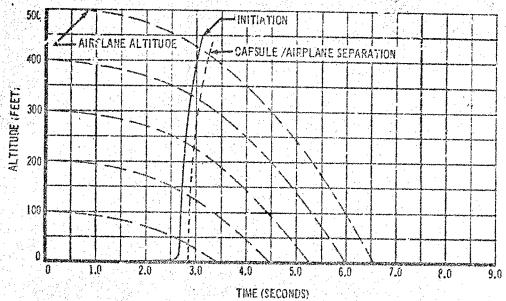


Figure 164. Three-Mar. Cockpit Pad Capsule Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure

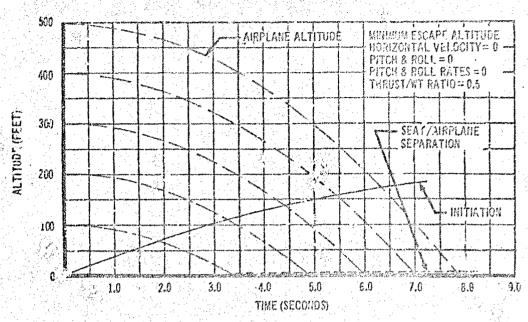


Figure 159. Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude VTOL Hover Flight Engine Fallure - Maximum Stability Case

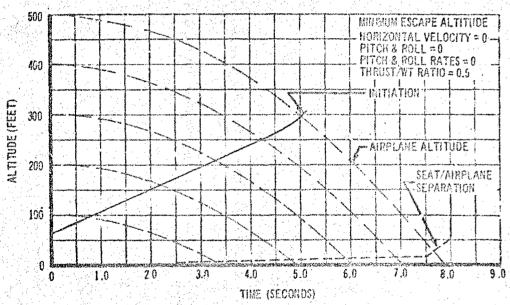


Figure 160. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escaps
Altitude VTOL Haver flight Engine Failure - Maximum Stability Caze

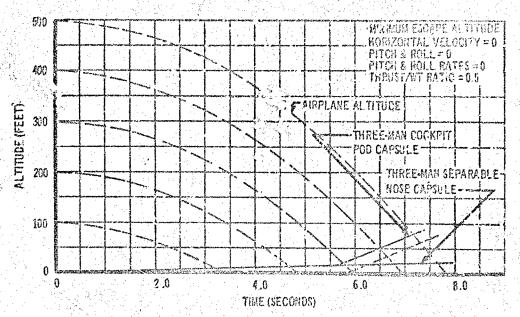


Figure 161. Three-Man Vehicle Cockpit Fed and Separable Nose Capsula Minimum Escape Altitudes VTOL Hover Flight Engine Failure - Maximum Stability Case

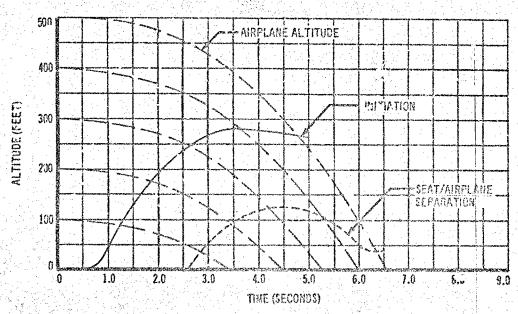


Figure 162. Three-Man Vehicle Open Ejection Seats Minimum Escape Allitude VTOL.
Hover Flight Cruise Engine Feilure

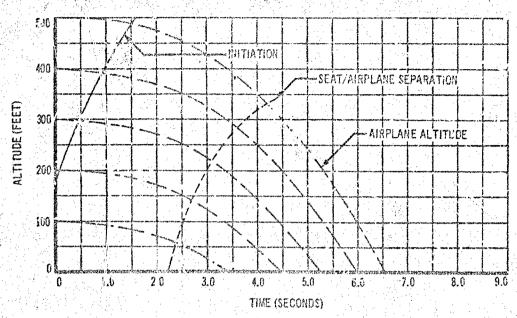


Figure 163. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Altitude VYOL Hove: Flight Cruise Engine Failure

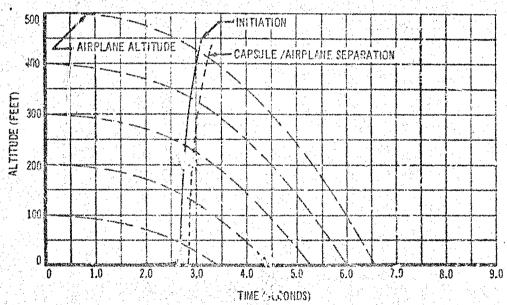


Figure 164. Three-Man Cockpit Pod Capsuls Minimum Escape Altitude VTOL Hover Flight Cruise Engine Failure

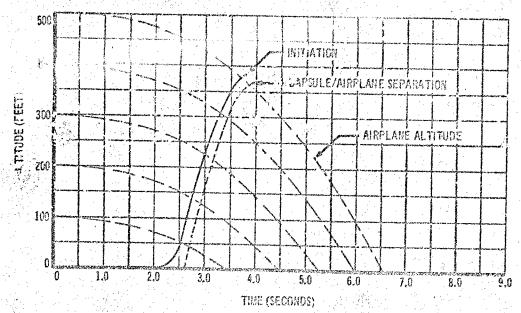


Figure 1.45. Three-Man Vehicle Separable Nose Capsule Minimum Escape Altitude VTOL Hover Flight Craise Engine Failure

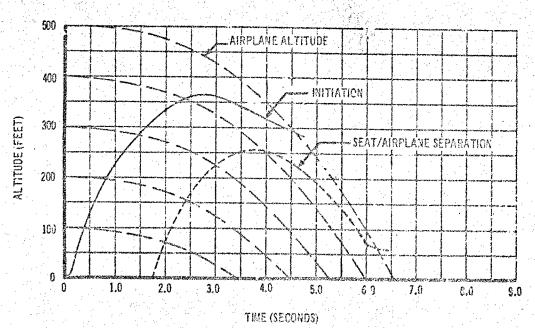


Figure 166. Three-Man Vehicle Oven Ejection Seats Minimum Escape Africude VTOL Hover Flight Lift Engine Follure

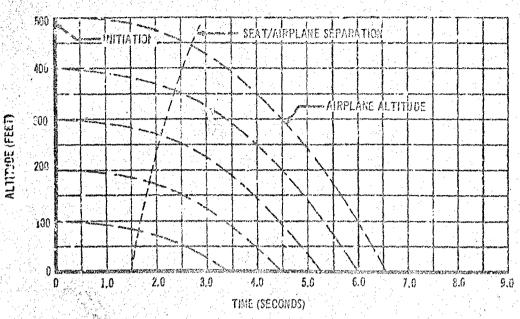


Figure 15%. Three-Man Vehicle Eucopsulated Ejection Sects Minimum Escape Altitude VTOL Hover Flight Lift Engine Failure

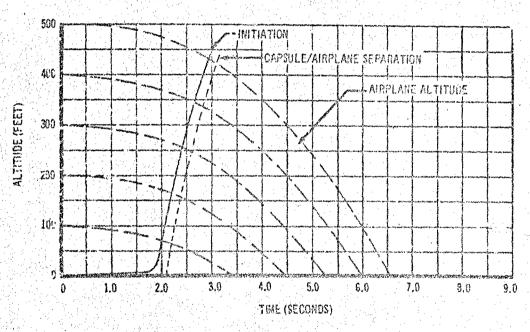


Figure 168. Three-Man Cockpit Pod Capsule Minimum Excope Altitude VTGL Hover Flight Lift Engine Follote

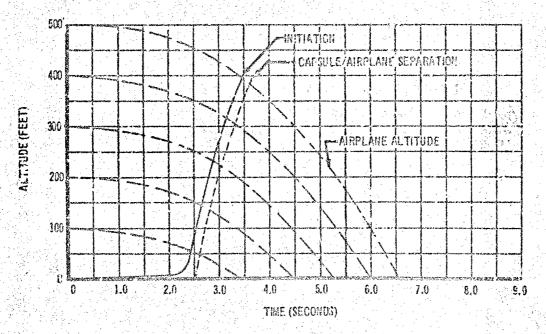


Figure 169. Three-Men Separable Nose Capsule Minimum Escape Altitude VYOL Hover Flight Lift Engine Failure

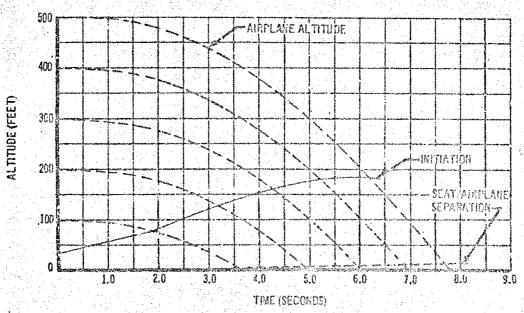


Figure 170. Three-Man Vehicle Open Ejection Souts Minimum Escape Attitudes 85 Ft/Sec Transition Cruise Engine Failure

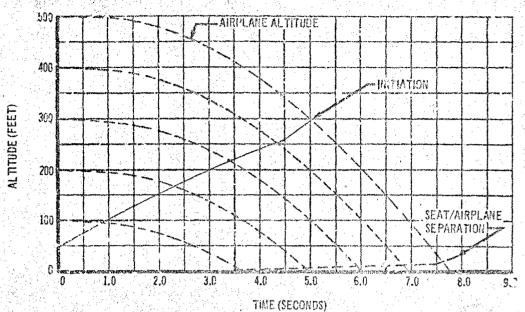


Figure 171. Three-Man Vahicla Encopsulated Ejertian Seats Minimum Except Altitudes 85 Ft/Sec Transition Cruise Engine Failure

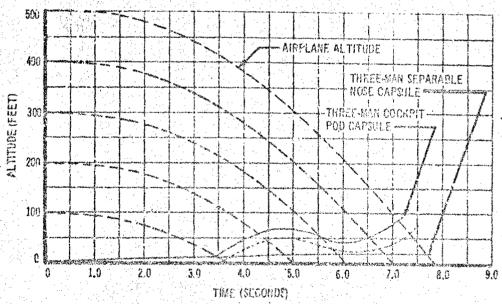


Figure 172. Three-Man Vehicle Cockpit Pud and Separable Nove Capsule Minimum Escape
Abiliudes 65 Ft/Sec Transition Cruise Engine Failure

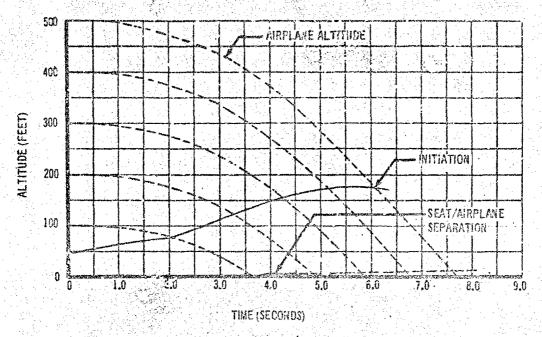


Figure 173. Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure

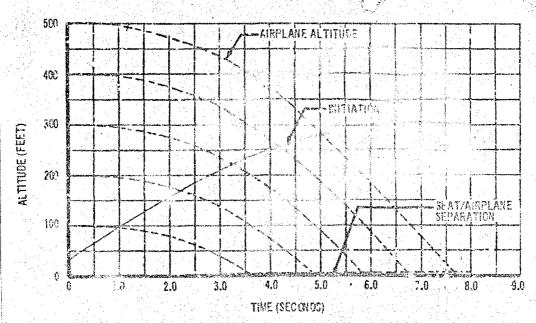


Figure 374. Three-Man Vehicle Encopsulated Equation Seats Minimum Excape
Altitudes 85 Ft/Sec Transition Lift Engine Failure

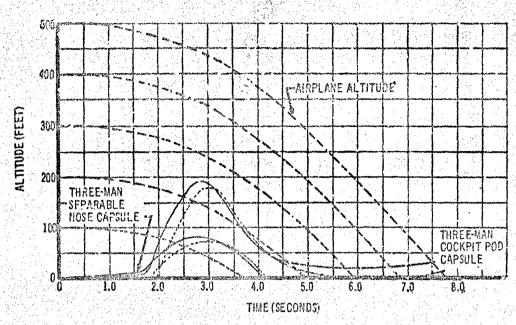


Figure 175. Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape Altitude 85 Ft/Sec Transition Lift Engine Failure

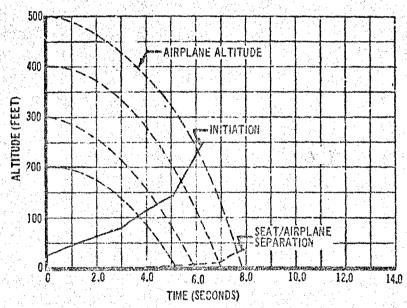


Figure 176. Three-Man Vehicle Open Ejection Seats Minimum Escape Altitude 120 Ft/Sec Transition Cruise Engine Fullura

a des condistres estados de Arianos Arianos respectivos de la constante de la constante de la constante de la c

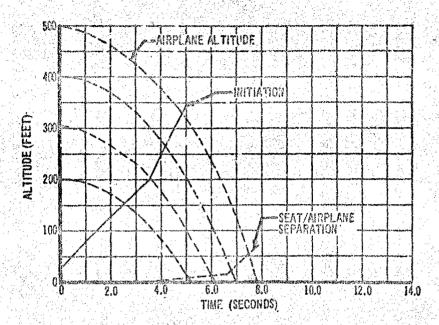


Figure 177. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escaps Altitude 120 Ft/Sec Transition Cruise Engine Fallure

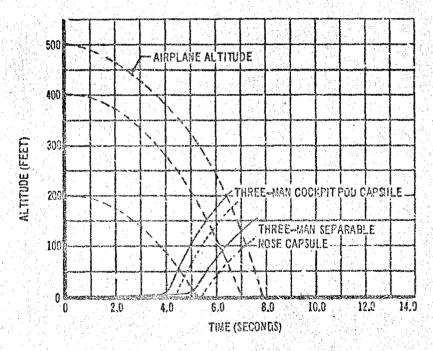


Figure 178. Three-Man Vehicle Cackpit Pod and Separable Noze Capsule Minimum
Escape Altitude 120 Ft/Sec Transition Cruise Engine Failure

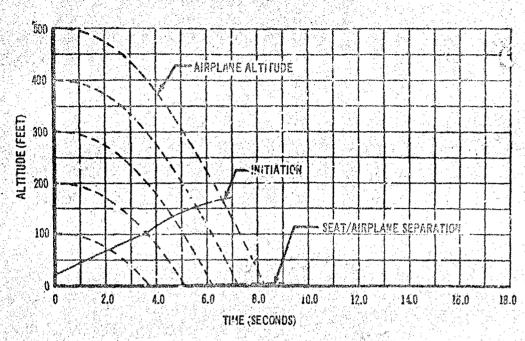


Figure 179. Three-Man Vehicle Open Ejection Seats Minimum Escape Altitudes 120 Ft/Sec Transition Lift Engine Failure

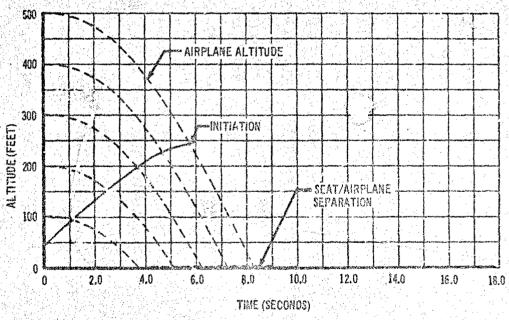


Figure 180. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escape Allitudes
120 Ft/Sec Transition Lift Engine Failure

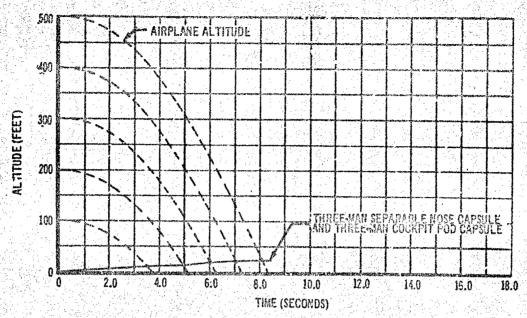


Figure 181. Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Kinimum Escape
Altitudes 120 Ft/Sec Transition Lift Engine Failure

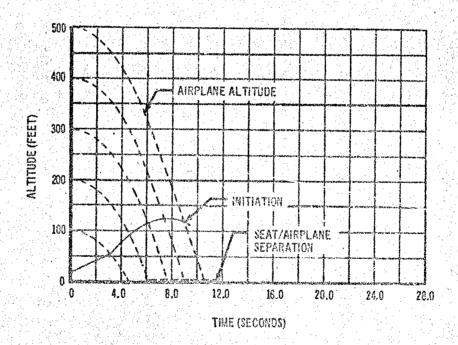


Figure 182. Three-Man Vehicle Open Ejection Scate Minimum Escape Altitudes 170 Ft/Sec Transition Cruise Engine Fallure

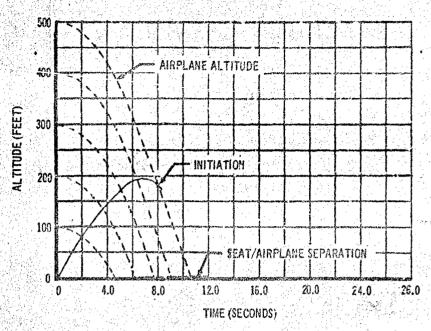


Figure 183. Three-Man Vehicle Encapsulated Ejection Soats Minimum Escape Altitude 170 Ft/Sec Transition Cruise Engine Failure

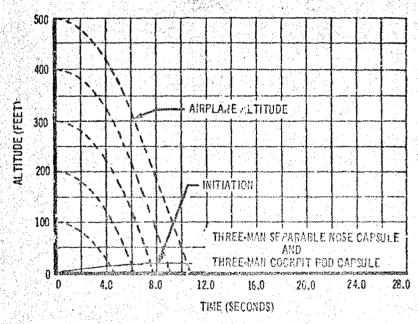


Figure 184. Three-Man Vehicle Cockpit Fed and Separable Nose Capsule Minimus. Escupe Altitudes 170 Ft/Sec Transition Cruise English Failure

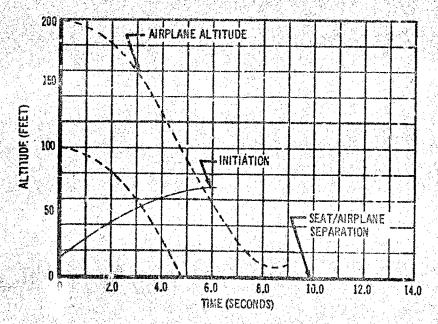


Figure 185. Three-Han Vehicle Open Ejection Seats Minimum Escape Altitudes 170 Ft/Sec Transition Lift Engine Failure

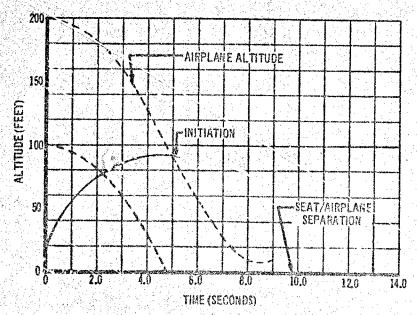


Figure 186. Three-Man Vehicle Encapsulated Ejection Seats Minimum Escaps Altitudes
170 Ft/Sec Transition Lift Engine Failure

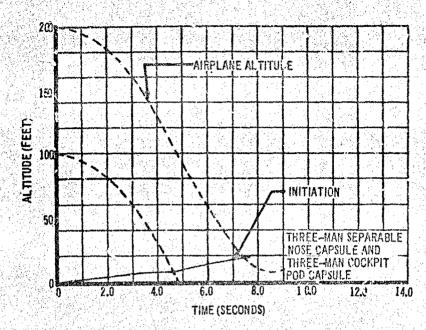


Figure 187. Three-Man Vehicle Cockpit Pod and Separable Nose Capsule Minimum Escape
Altitudes 170 Ft/Sec Transition Lift Engine Failure

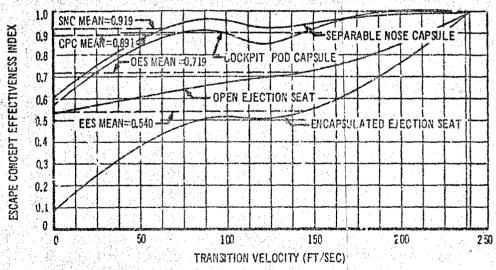


Figure 188. Three-Man Combined Capability Vehicle Cruise Engine Failure During
Transition Escape Concept Effectiveness Index

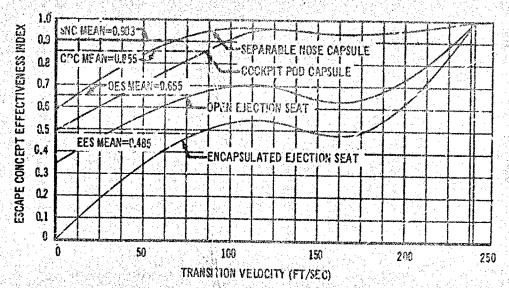
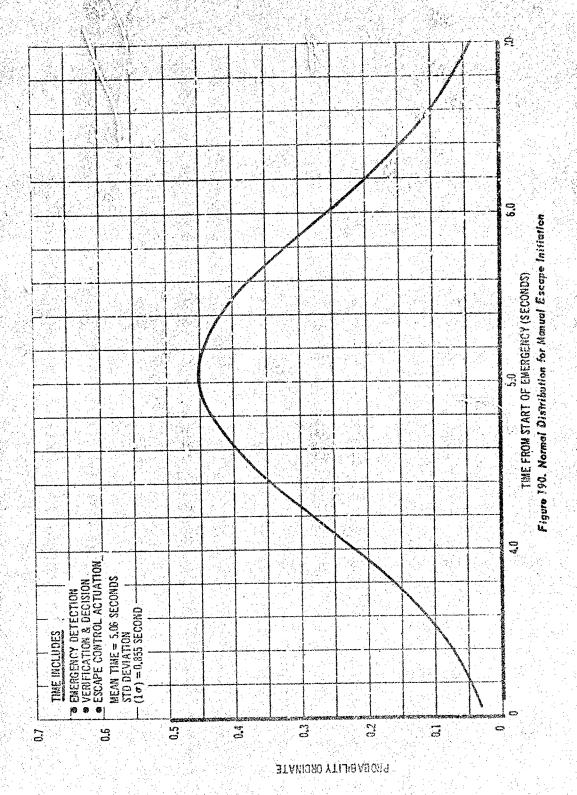


Figure 189. Three-Man Combined Capability Vehicle Lift Engine Failure During Transition Escape Concept Effectiveness Index

Table VIII. VTOL Hover and Transition Flight Regime Escape Concept Effectiveness Summary (Engine Failure Analysis)

Escape Concept Effectiveness Index				
ESCAPE CONCEPT	Maximum Stability Case- (Hover Or	Cruise	Engine	Average
	Two-Man Vehicle			
Open Ejection Seat	0.805	0.808	0.738	0.773
Encapsulated Ejection Seat	0.597	0.624	0.554	0.589
Cockpit Pod Capsule	0.646	0.751	0.767	0.759
Separable Nose Capsule	0.643	0.765	0.839	0.807
	Three-Man Vehicle			AND THE PROPERTY OF THE PROPER
Open Ejection Seat	C.703	0.719	0.655	0.687
Encapsulated Ejection Seat	0.509	0.540	0.485	0.512
Cockpit Pod Capsule	0.925	0.891	0.855	0.873
Separable Nose Capsule	0.945	0.919	0.903	0.911





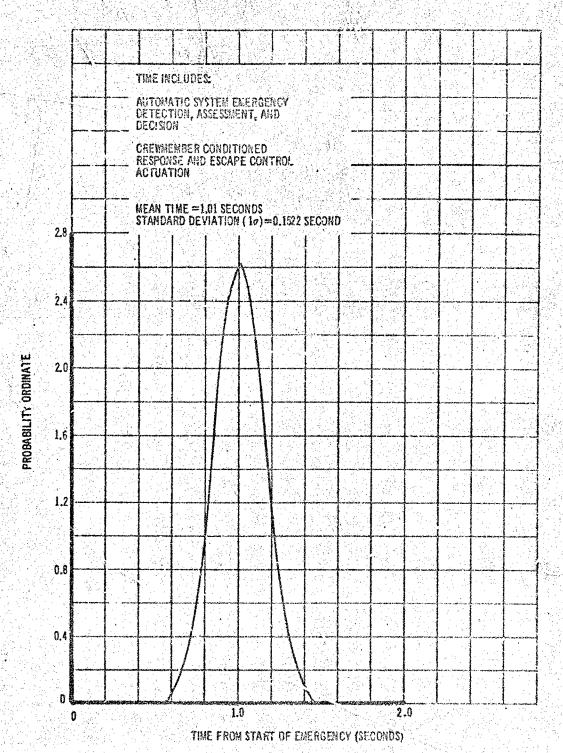



Figure 191. Normal Distribution for Semiautematic Escape Initiation

Table IX. Manual Escape Ing. ation Time Normal Distribution Data

The state of the	The state of the same of the s	of the same of the	an management of the same of	(Carrent person and	
i de la companya de l	Reaction Time Flements (Seconds) Der	Standard Deviation	Range (Seconds)		
		(5)	Minimum	Moximum	
(1)	Visual stimulus response to master warn light	0.288	0.0425	0.121	0.432
s s r	Refocus to vehicle flight in- struments and subsystem status displays (Binocular near accommodation and convergence)	0.900	0.155	0.50	1.45
a c v d t	Scan and verification that in "escape" emergency condition exists (Complex discrimination of lisplayed elements — reaction time longer the more dements to assess)	3.270	(Not Criven)	1.55	5.00
n s	Cime to initiate discrete covernent (release grip on tick, move hand 20 centineters, and grip D-ring)	0.257	0.06	0.108 (Esti- mated)	0.386 (Esti- mated)
(5) A 8	rmpull of D-ring (over oz resistance)	0.300	(Not Given)	0.125 (Estimated)	0.45 (Esti- mated)
Comb Mean Std. I	inod Maximum Times 7 Time (Average) 5.	405 Second 718 Second 0615 Second 8855 Second	la Is		

Table X. Semiautomatic Escaps Initiation Time Normal Distribution Data

Beaction Time Elements	Mean Time (Seconds)	Standard Deviation ( \sigma)	Range (Seconds,	
			Minimum	Maximum
(1) Time allowance for auto- matic cystem setsing, assessment, decision, and "eject" display	0.2		0.2	0.2
(2) Visual stimulus to "ej- oct" light	0.288	0.0425	3.121	0.432
(3) Time to initiate discrete movement (re- lease stick, move hand 20 centimeters, and grasp U-ring)	0.257	9.06	0.108 (Esti- matec)	0.386 (Esti- mated)
(4) Armpull of D-ring	0.300		0.126 (Esti- mated)	0.450 (Esti- mated)
Combined Minimum Times Combined Maximum Times Mean Time (Average) Std. Deviation (1 \sigma) (Based on 3 \sigma \text{distribution})	0,555 Second 1.468 Second 1.0115 Second 0.1522 Second	s S		

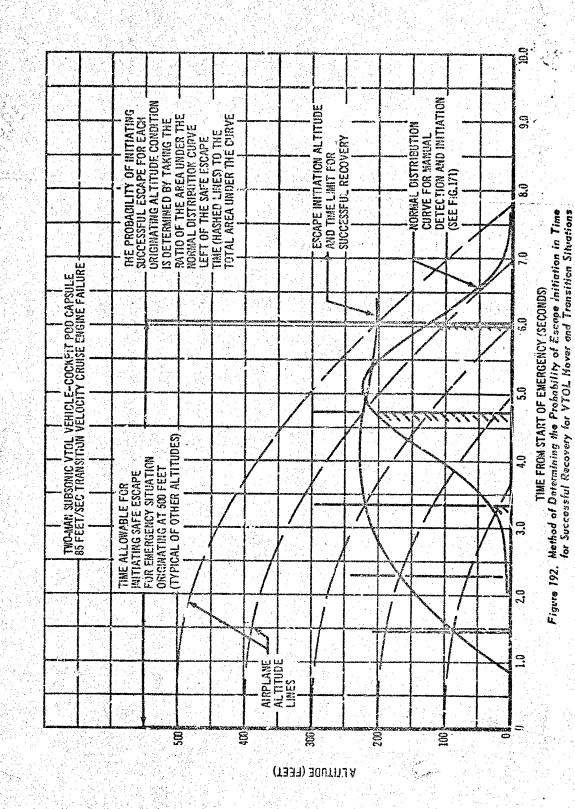

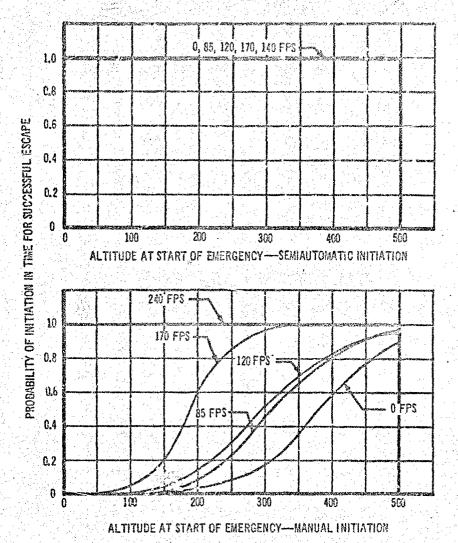


Figure 193. Probability of Successful Escape During VTOL Transition for Two-Man Vehicle Open Ejection Sects Cruise Engine Failure

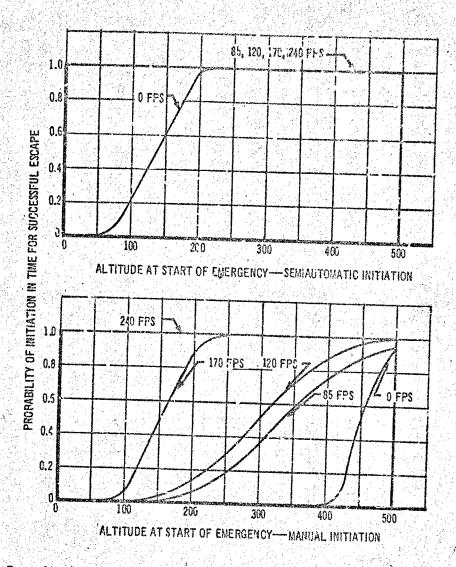


Figure 194. Probability of Successful Escape During VTOL Transition for Two-Man Vehicle Open Ejection South Lift Engine Failure

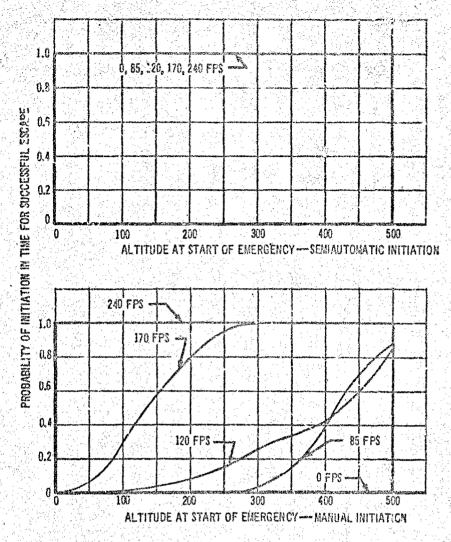


Figure 195. Probability of Successful Escape During VTOL Transition for Two-Man Vehicle Cockpit Pod Capsule Cruise Engine Failure

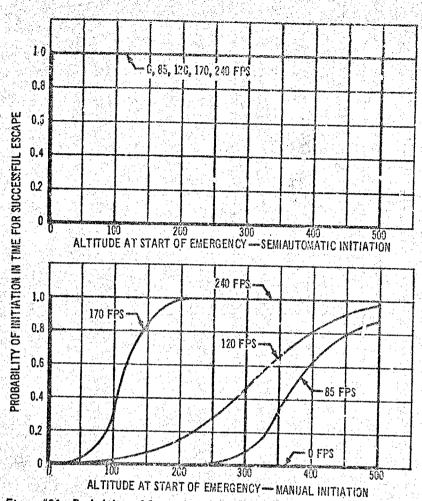


Figure 196. Probability of Successful Escape During VTOL Transition for Two-Man Vehicle Cockpit Pod Capsule Lift Engine Failure

Table XI. YTOL Hever and Transition Flight Automatic Detection and Initiation Evaluation Summary

The second secon	Probability of Successful Escape Initiation		
TWO-MAN SUBSONIC	Lanual Initiation	Semiautomatic Initiation	
VTOL VEHICLE Cpen Ejection Seats Cockpi/ Pod Capsule	Cruise Lift Engine Engine Failure Failure Avg 0.502 0.466 0.484 0.405 0.485 0.445	Cruise Lift Fngine Engine Failure Failure Avg 1.000 1.000 1.000 1.000 0.95 0.975	

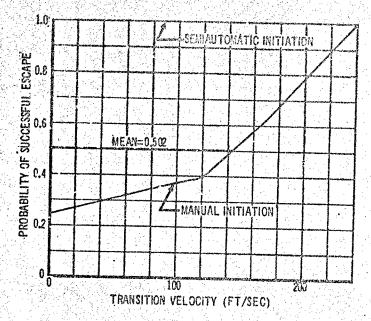


Figure 197. Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VTOL Vehicle, Cruise Engine Failure, Open Ejection Seats

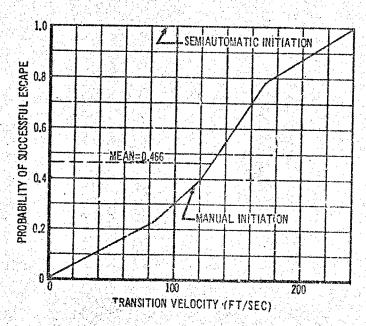


Figure 198. Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VTOL Vehicle Lift Engine Failure Open Ejection Seats

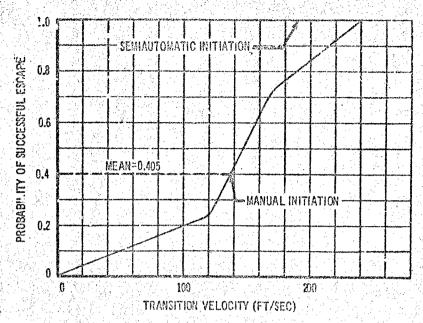


Figure 199. Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VTOL Vahicle, Cruise Engine Failure Cockpit Pod Capsulo

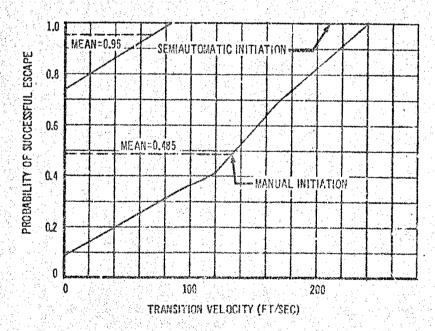


Figure 200. Probability of Successful Escape Versus Transition Velocity Two-Man Subsonic VTOL Vehicle, Lift Engine Failure Cockpit Pod Capsule

## 2. CONVENTIONAL TAKEOFF AND LANDING

### a. Escape Conditions

To evaluate the relative effectiveness of the various escape concepts for emergencies that might occur during conventional takeoff and landing, certain representative emergency flight conditions were established. Figures 201 through 204 define the escape situations in terms of rititude above the terrain, velocity, and flight path (descent angle) versus time following the start of the emergency situation. For this study, the emergency altuations were considered to start at any altitude from ground level to 500 feet, and the vehicle velocity was considered to be 250 ft/sec at the start of the emergency for all cases. The emergency flight conditions range from level flight to a maximum vehicle aerodynamic pushover capability of -0.6g. The conditions defined on the figures are for -0.6g, -0.1g, +0.4g, and +0.8g pushovers.

## b. Escape Concept Effectiveness

The four-man supersonic low-altitude dash vehicle was used as a basis for evaluating and comparing the effectiveness of open ejection seats, encapsulated ejection seats, cockpit pod, and separable nose capsule escape concepts for the conventional takeoff and landing flight regime. Figures 205 through 220 show the capabilities of the escape concepts with respect to the emergency flight conditions defined in Figures 201 through 204. The escape capabilities were computed based on the escape system configurations described in Section III. The time required for preseparation functions and sequencing requirements (see Figure 127) for the four-man vehicle is 0.2 seconds for the cockpit pod and separable nose capsule concepts. For the open ejection seat concept, 2.06 seconds is required from initiation until the fourth crewman clears the vehicle. For the encapsulated ejection seat concept 3.15 seconds is required.

Escape concept effectiveness indexes were determined for each of the flight conditions and escape concepts. The method of analysis is the same as shown in Figure 127 and described in Section V.1.1. Figure 221 is a plot of the results of the analysis and shows, for each escape concept, the escape effectiveness index versus pushover normal load factor (n). Also shown on the figure is the mean escape effectiveness index for the entire takeoff and landing emergency flight regime for each concept.

#### c. Automatic Defection and Initiation Evaluation

For insight into the possible need for, or benefits of, automatic or semiautomatic emergency detection and escape initiation in the taleoff and landing flight regime, a special analysis was made. For each emergency situation defined in Figures 201 through 204, the time allowable after the start of the emergency situation, during which escape initiation would result in successful recovery of the entire crew, was compared with the time required for the pilot to manually detect and initiate escape to determine the probability of successful escape for manual initiation. The probability of escape initiation in

and the second second

time for successful recovery also was determined for a semiautematic system in which the airplane conditions are automatically seased and escape decision is computerized; the pilot's function being only to actuate the escape control.

Normal distribution curves for escape initiation relative to time are shown in Figures 190 and 191. The method of determining the probabilities of successful escape initiation for each emergency situation is the same as described in Section V.1.c and in Figure 192.

The probabilities of successful escape, relative to altitude above the terrain at the start of the emergency, were determined (based on data from Figures 205 through 220) for the four-man vehicle open ejection seat and cockpit pod capsule concepts for each emergency pushover situation. These data are shown plotted in Figures 222 and 223 for manual and semiautomatic initiation.

From the data shown on Figures 222 and 223, the mean probabilities for the total altitude range (0 to 500 feet) were determined for each g pushover condition. Figures 224 and 225 show the probability of successful escape versus pushover load factor for manual and semiautomatic initiation for open ejection seats and cockpit pod capsules. Also shown is the average or overall total probability of successful escape initiation for the entire takeoff and landing emergency spectrum defined.

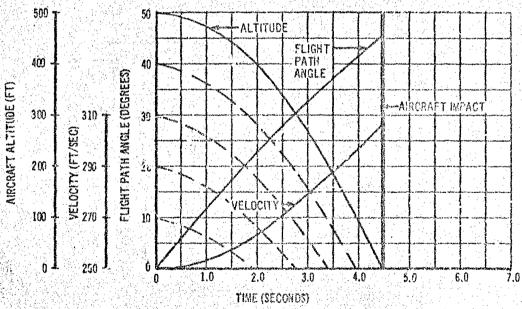


Figure 201. -0.6 g Aircraft Pushaver During Conventional Takeoff or Landing
Simultions. Initial Velocity 250 Ft/Sec Altitude 0 to 500 Foot

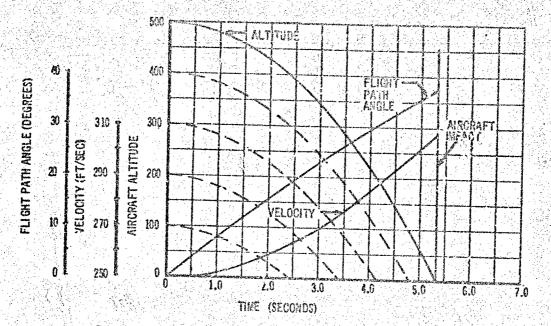


Figure 202. -0.1 g Aircraft Pushover Buring Conventional Takeoff or Landing Situations. Initial Velocity 250 Ft/Sec Aititude 0 to 50) Feet

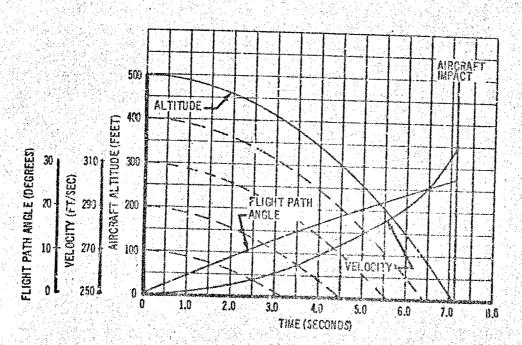


Figure 203. 0.4 g Aircraft Pushever During Conventional Takast or Landing Situations. Initial Valocity 250 Ft/Sec Altitude 0 to 500 Feet

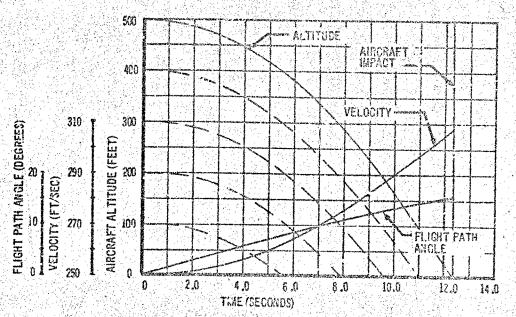


Figure 204. 0.8 g Aircraft Pushove's uring Conventional Takeoff or Landing Situations, Initial Valuatity 250 F1/Sec Altitude 0 to 500 Feet

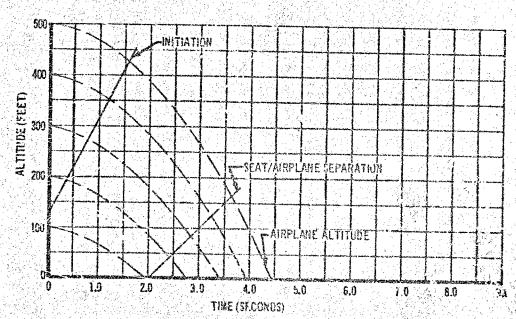


Figure 205. Four-Man Vehicle Landing and Takeoff Emergency
Open Ejection Seat Minimum Escape Altitude -0.6 g Pushover

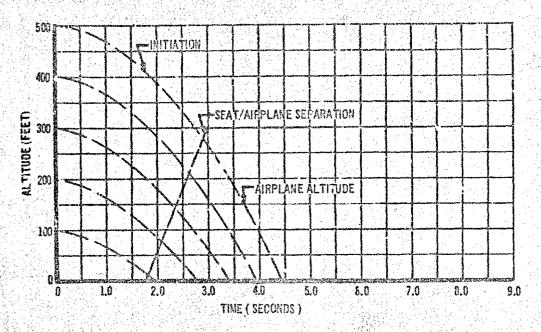


Figure 206. Four-Man Venicle Landing and Takeoff Emerginary Encapsulated Ejection Scat Minimum Escape Altitude -0.6 g Pushover

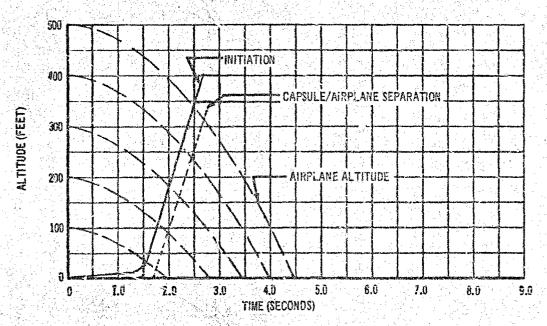


Figure 207. Four-Man C chait Pod Capsule Takeoff and Landing Emergency Minimum Escape Altitude -0.6 g Pushover

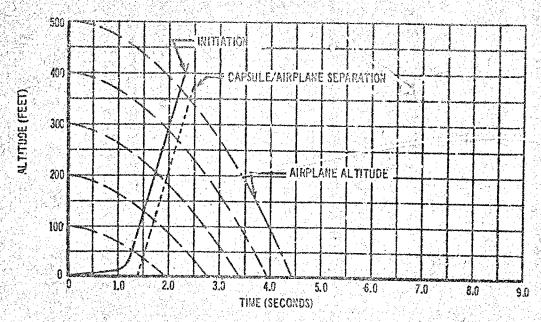


Figure 208. Four-Man Separable Nose Capsule Landing and Takeoff Emergency
Minimum Escape Altitude -0.6 g Pushover

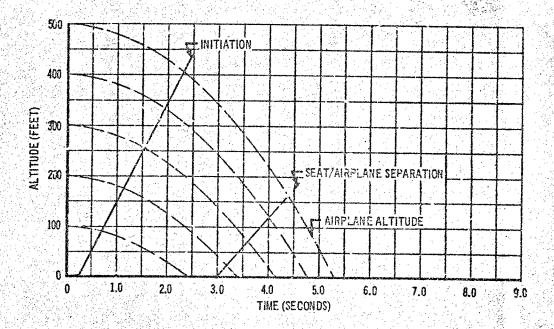


Figure 209. Four-Man Vehicle Landing and Takeoff Emergency
Open Ejection Seat Minimum Escape Altitude -0.1 g Fushover

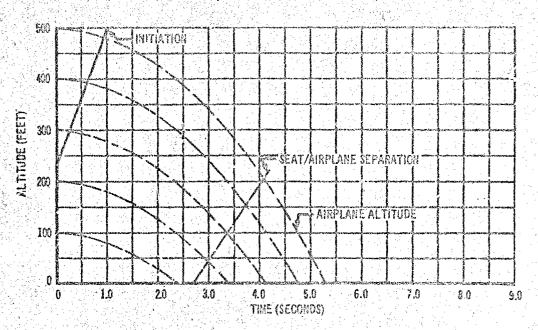


Figure 210. Four-Man Vehicle Landing and Takeeff Emergency
Encapsulated Ejection Seat Minimum Escape Altitude -0.1 g Pushover

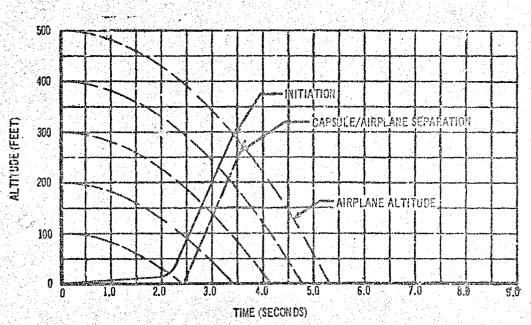


Figure 211. Four-Man Cockpit Pod Capsule Landing and Takcoff Emergency
Minimum Escape Altitude - 0.) g Pushover

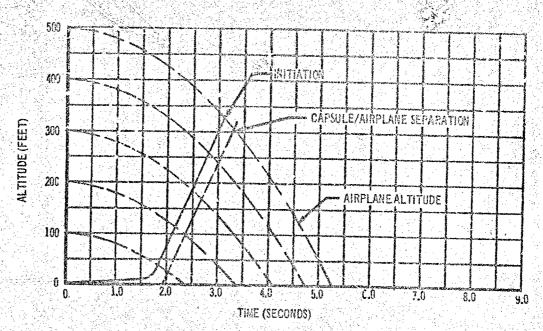


Figure 212. Four-Men Separable Hose Copyule Landing and Takeoff Emergency
Minimum Escape Altitude -0.7 g Pushover

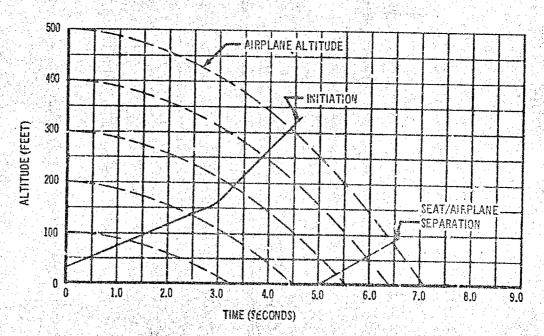


Figure 213. Four-Man Vehicle Landing and Takeoff Emergency Open Ejection Seat Minimum Escape Altitude 0.4 g Pushaver

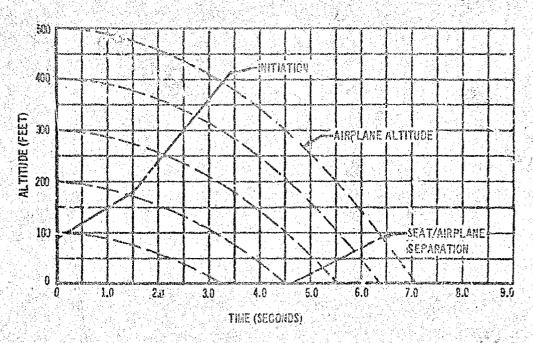


Figure 214. Four-Man Vehicle Landing and Takcoff Emergency Encapsulated Ejection Sout Kinimum Escape Altitude 0.4 g Pushover

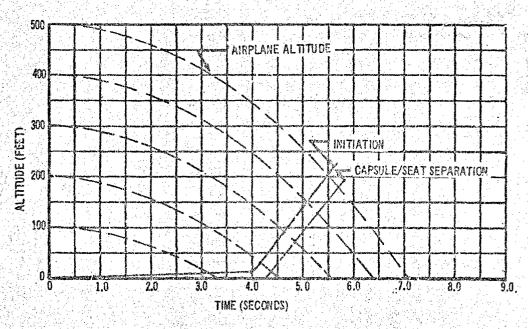


Figure 215. Four-Man Cockpit Pod Capsule Landing and Takeoff Emergency Minimum Escape Altitude 0.4 g Pushover

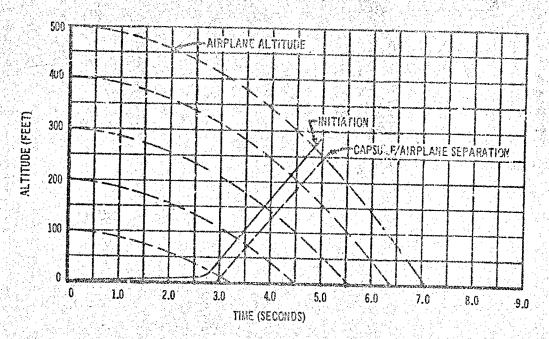


Figure 216. Four-Man Separable Nose Capsule Landing and Takeoff Emergency
Minimum Escape Altitude 0.4 g Pushover

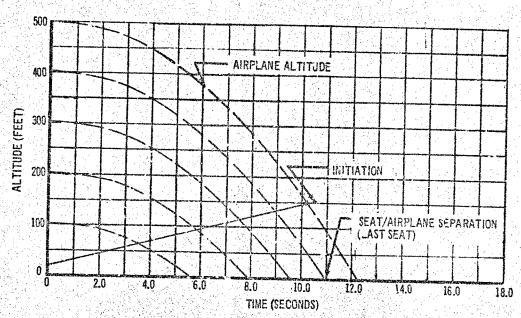


Figure 217. Four-Man Vehicle Landing and Takeoff Emergency
Open Ejection Seat Minimum Escape Altitude 0.8 g Pushover

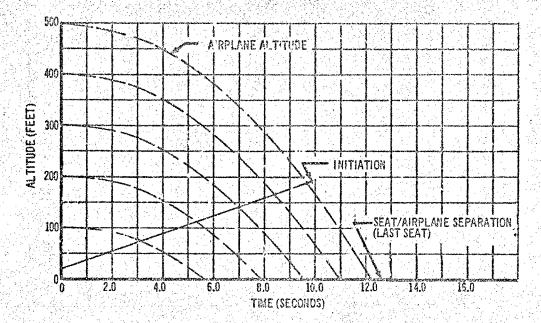


Figure 218. Four-Man Vehicle Landing and Takeoff Emergency Encapsulated Ejection Seat Minimum Escape Altitude 0.8 g Pushover

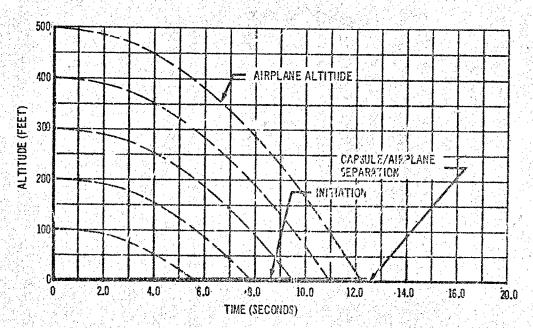


Figure 219. Four-Man Cockpit Pod Capsule Landing and Takeoff Emergency Minimum Eucape Altitude 0.8 g Pushover

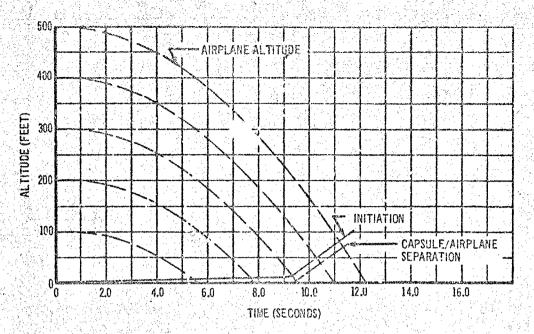


Figure 220. Four-Man Separable Nose Capsule Landing and Takeoff Emergency
Minimum Escape Alfitude 0.8 g Pushover

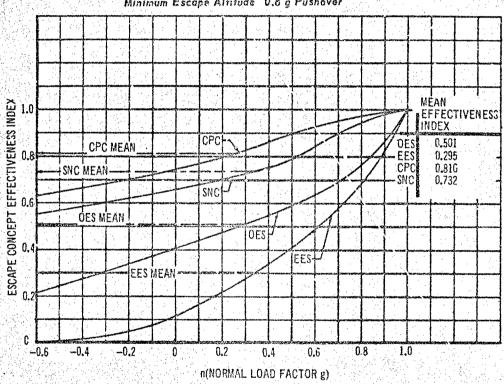


Figure 221. Four-Man Vehicle Takeoff and Landing Escape Concept Effectiveness Evoluation

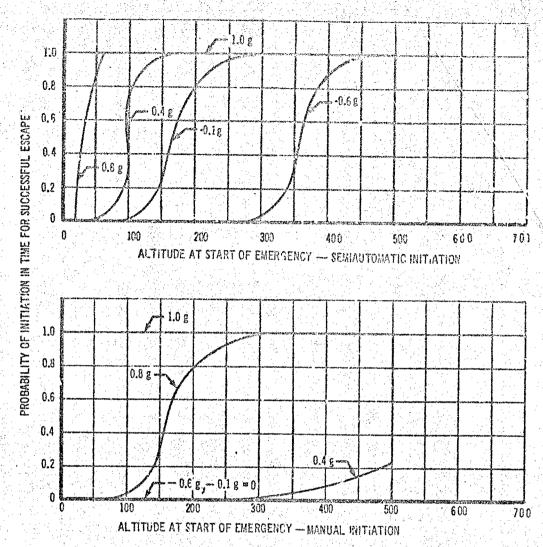


Figure 222. Probability of Successful Escape Versus Altitude for Four-Man Vehicle
Open Ejection Sects - Takeoff or Landing Emergency

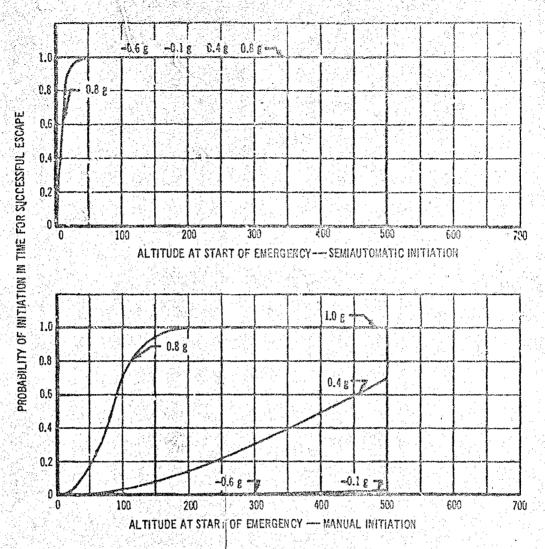


Figure 223. Probability of Successful Escape Versus Altitude for Four-Man Vehicle
Cockpit Pod Capsule - Takeoff or Landing Emergency

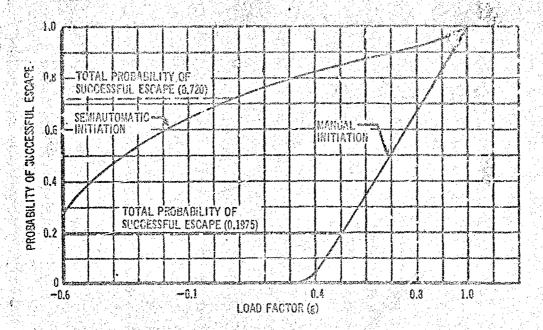


Figure 224. Probability of Successful Escape Versus Pushover Lood Factor
Four-Man Vehicle Open Ejection Scats - Takcoff or Landing Emitgency

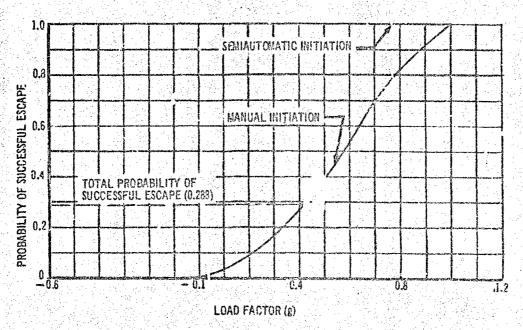


Figure 225. Probability of Successful Escape Versus Pushover Land Factor Four-Man Vehicle Cockpit Pad Capsule - Takeoff or Landing Emergency

# 3. LOW-ALTITUDE DASH

## a. Escape Conditions

Emergency flight situations, representative of the escape conditions that might exist during low-altitude dash, were established as a basis for evaluation and comparison of the effectiveness of the various escape concepts.

For these analyses, the low-altitude dash flight regime was considered to range from 200 to 500 feet above the terrain and to encompass a speed rarge from Mach 0.9 to 1.2. Emergency flight conditions with respect to airplane velocity, altitude, and descent angle were computed for various situations from level flight to a maximum pushover structural limit of -3.0g. Figures 226 227, and 228 show the low-altitude dash emergency flight conditions for +1.0g (level flight), 0g, -1.0g, -2.0g, and -3.0g pushovers for initial airplane speeds of Mach 0.9, 1.1, and 1.2, respectively.

## b. Escape Concept Effectiveness

Escape concept effectiveness analyses were accomplished for the three-man combined capability vehicle and the four-man supersonic low-altitude dash vehicle. Effectiveness indexes were determined for each escape concept relative to each of the normal load factor pushover g and velocity situations defined on Figures 226, 227, and 228. To obtain a mean overall effectiveness index for each concept, integration procedures involving the use of digital computers are used to sum and average the escape concept effectiveness indexes throughout the low-altitude dash speed and altitude flight regime and range of pushover g's.

The method of determining the escape concept effectiveness index for each flight condition is similar to that shown in Figure 127 and described in Sections V.1.b and V.2.b.

Figures 229 through 280 show data pertaining to escape concept effectiveness determinations for the inree-man combined capability vehicle. Figures 229 through 244 show the escape concept capabilities relative to emergency situations originating at ultitudes between 200 and 500 feet and Mach 0.9. as defined in Figure 226. Figures 245 through 260 show the escape concept carabilities for escape conditions at Mach 1.1 as defined in Figure 227. Figures 261 through 276 show the escape capability data for the conditions at Mach 1.2. as defined in Figure 228. For these figures, escape of reept capability data from Section III were used to define the altitude versus time limit for separation of the seats or capsules required for successful recovery (see Figure 127). Escape initiation lines were constructed by taking into account the time required for preseparation and sequencing requirements. These are: 0.2 second for the cockpit pod and separable nose capsule concepts; 1.56 seconds for the open ejection seat concept; and 2.65 seconds for the encapsulated ejection seat concept. The longer times for the open seats and encapsulated seats are primarily due to ejection sequencing required for all three of the crewmembers to clear the aircraft.

Figures 277, 278, and 279 show the escape concept effective indexes. as determined from the data of Figures 229 through 276, plotted versus simplene pushover load factor for Mach 0.9, 1.1, and 1.2. Figure 280 shows a plot of the mean escape concept effectiveness indexes versus Mach number derived from summing and averaging data for the complete range of pushover g from +1g to -3.0g from Figures 277, 278, and 279. Also listed on the figure is the mean overall effectiveness index for each escape concept for the entire low-altitude dash flight regime. This is obtained by summing and averaging the effectiveness index data on the figure for the complete Mach number range from 0.9 to 1.2.

This analysis was accomplished on the basis of the escape concepts' capabilities to recover the crewmembers prior to ground impact. For the open ejection seat concept, the mean overall effectiveness index listed on Figure 265 has been reduced by the factor 0.175 to account for its reduced capability at high speed due to deceleration, windblast, and flailing fatalities (see Section V.4).

Figures 281 through 332 present data pertaining to the escape concept effectiveness analysis for the four-man supersonic dash vehicle. The method of analysis and sequence of data presentation is the same as described for the three-man vehicle. However, for the four-man vehicle the time required for pre-ejection and sequencing requirements is 2.05 seconds for open ejection seats and 3.15 seconds for encapsulated ejection seats.

The mean overall effectiveness indexes for each escape concept for the low-altitude dash flight regime are summarized in Table XII for both the three-man and four-man vehicle.

Table XII. Low Altitude Flight Regime Escape Concept Effectiveness Summary

	Low Altitude Dash Escape Effectiveness Index	
Escape Concept	Three-man Vehicle	Four-man Vehicle
Open Ejection Seats	0.058	0.042
Encapsulated Ejection Seats	0.226	0.170
Cockpit Pod Capsule	0.938	0.928
Separable Nose Capsule	0.794	J. 609

## c. Automatic Detection and Initiation Evaluation

For emergencies occurring during high-speed low-altitude dash the time available for the pilot to detect and verify the emergency situation, make the decision to initiate escape, and to actuate the escape control is extremely critical. This section presents the results of an analysis to determine the probability of escape initiation in time for successful recovery of the crew for manual detection and initiation and for semiautomatic detection and initiation. Thus, the need for or benefits of automatic or semiautomatic systems may be assessed.

The method of analysis is similar to that described for the VTOL and conventional takeoff and landing flight regimes in Sections V.1.c. and V.2.c.

Manual and semiautomatic initiation as used in this study are defined in Section V.1.c. Tables IX and X and Figures 190 and 131 define the estimated normal distribution curves for manual and for semiautomatic initiation relative to time from the start of the emergency situation. Figure 192 illustrates the method of determining the probability of escape initiation in time for successful recovery of the crew relative to altitude at the start of the emergency situation.

The four-man supersonic dash vehicle, and open ejection seats and cockpit pod capsule concepts were selected for use as a basis for this analysis. Successful recovery for each emergency situation was considered to include successful recovery of the entire crew. Therefore, for the open ejection seat concept, a successful recovery was considered one ir which the last of the four crewmembers, in sequenced ejections, would be successfully recovered.

The probabilities of initiating escape in time for successful recovery relative to altitude at the beginning of the emergency were determined for each of the emergency situations defined on Figures 226, 227, and 228. For this analysis the escape concept capabilities with respect to each emergency situation are the same as those used in the escape concept effectiveness analysis. These are, for the open ejection seat, shown on Figures 281, rough 284 for Mach number 0.9, Figures 297 through 300 for Mach number 1.1, and Figures 313 through 316 for Mach number 1.2. For the cockpit pod capsule they are shown on Figures 289 through 292 for Mach number 0.9, Figures 305 through 308 for Mach number 1.1, and Figures 321 through 324 for Mach number 1.2.

The probabilities of initiating escape in time for successful recovery are shown plotted versus altitude at the beginning of the emergency for each pushover g condition for Mach numbers 0.9, 1.1 and 1.2 on Figures 333, 334, and 335 for the open ejection seat concept and on Figures 336, 337, and 338 for the cockpit capsule concept. These figures include plots for both menual initiating and semiautomatic initiation.

The probabilities of initiating escape in time for successful recovery versus pushover g load factor for each speed condition are shown in Figures 339, 340, and 341 for open ejection seals and Figures 342, 343, and 344 for the cockpit pod capsule. These data were derived by determining the mean probability for the total altitude range of 200 to 500 feet for each g condition from data shown in Figures 333 through 338.

Figures 345 and 346 show the probability of successful recovery for both manual and semiautomatic initiation versus Mach number at start of emergency for the open ejection seat and cockpit pod capsule concepts. These data were derived by determining the mean probability for the entire range of pushover load factors from -3.0g to +1.0g from the data of Figures 339 through 344.

The overall mean probabilities of initiating successful escape for the entire low-altitude dash flight regime were derived from the data of Figures 345 and 346 and is indicated on the figures. This value for the open ejection seat concept has been reduced by the high speed survivability factor 0.175 (see Section V.4).

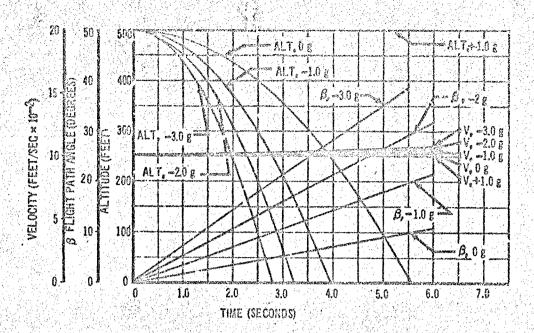


Figure 226. Escope Conditions for Law Altitude Dash Mach 0,9

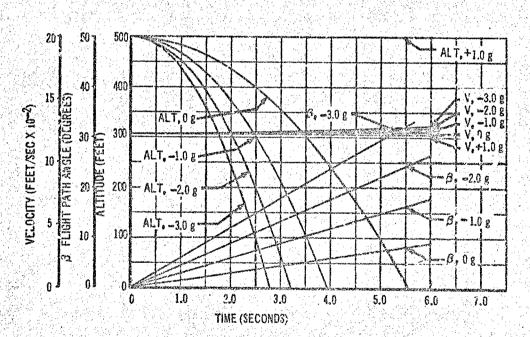


Figure 227. Escape Conditions for Low Altitude Dush Mach 1.1

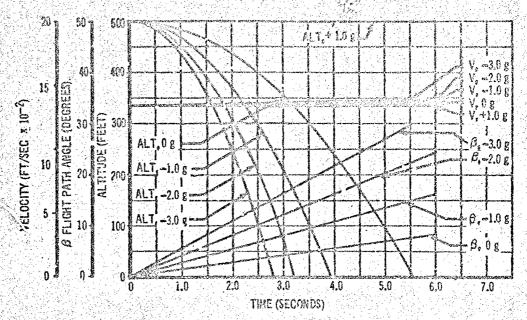


Figure 228. Escape Conditions for Low Allitude Dash Hoch 1.2

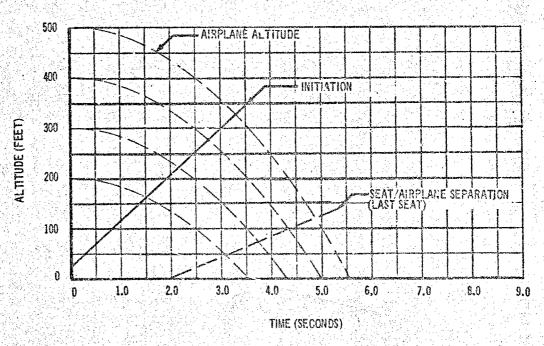


Figure 229. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9
Open Ejection Seat Minimum Escape Altitude Zero y Pushover

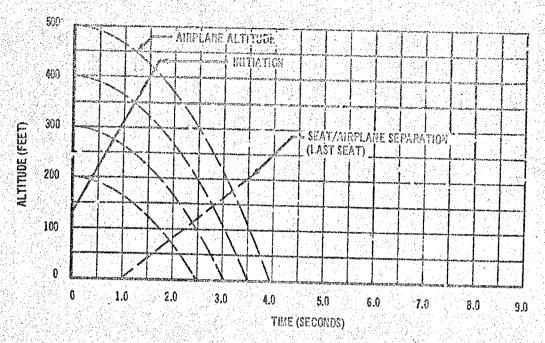


Figure 230. Three-Han Combined Corability Volicle Low Altitude Dash Hack 0.9

Open Ejection Soat Minimum Escape Altitude -1.0 g Pushover

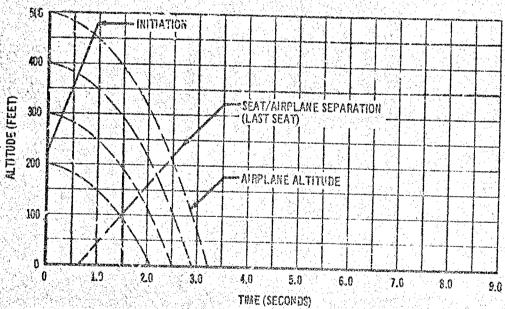


Figure 231. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9

Open Ejection Seat Minimum Escape Altitude -2.0 g Pushover

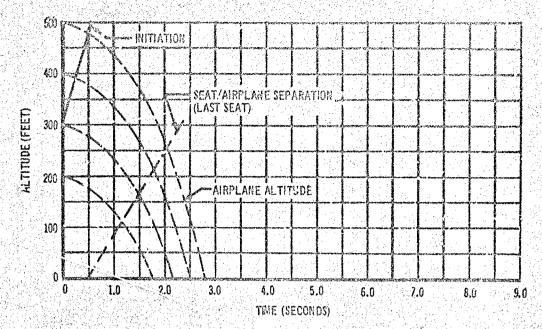


Figure 232. Three-Man Combined Capabitic, Vehicle Low Altitude Dash Mach 0.9 Open Ejection Seat Minimum Escape Altitude -3.0 g Pushover

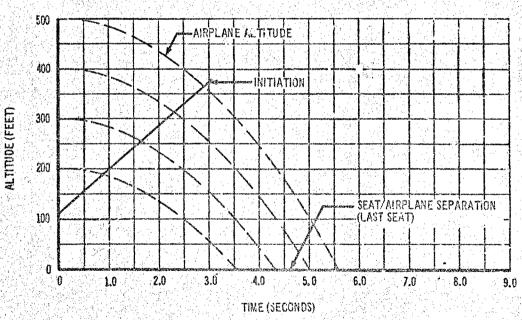


Figure 233. Three-Man Combined Capability Vehicle Love Altitude Dash Mach 0.3 Encapsulated Ejection Seat Minimum Escaps Altitude Zero g Pushover

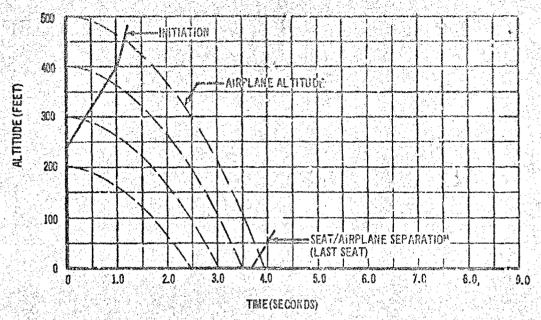


Figure 234. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.5 Encapsuicted Ejection Seat Minimum Escape Altitude -1.0 g Pushover

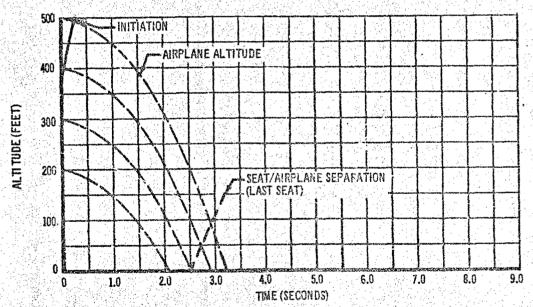


Figure 235. Three-Man Combined Capability Vehiclo Low Altitude Dash Mach 0.9 Encapsulated Ejection Seat Minimum Escape Altitude -2.0 g Pushover

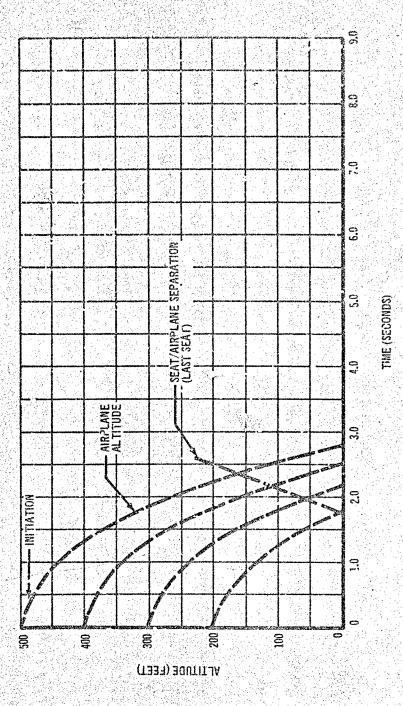


Figure 236. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9. Encapsulated Ejection Seat Minimum Escape Altitude -3.0 g Pushaver

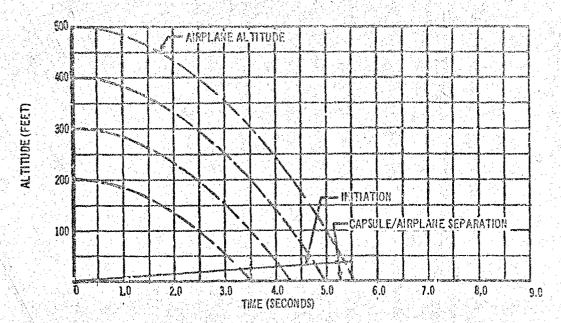


Figure 237. Three-Man Combined Capability Vehicle Low Altitude Dash Mack 0.9 Cockpit Pad Capsule Minimum Escape Altitude Zero g Pushover


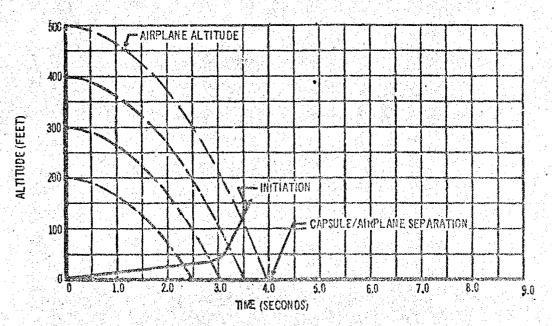


Figure 238. Three-Man Cambined Capability Vehicle Law Altitude Dash Mach 0.9
Cockpit Pod Capsule Minimum Escape Altitude -1.0 g Puzhevet

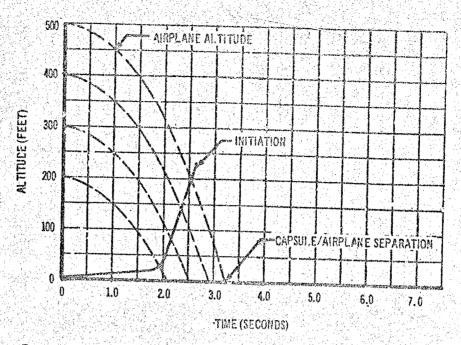

Flyure 239. Three-Man Combined Capability Vehicle Low Allitude Dash Mach 0.9 Cockpit Pod Capsulo Minimum Escape Allitude -2.0 g Pushover

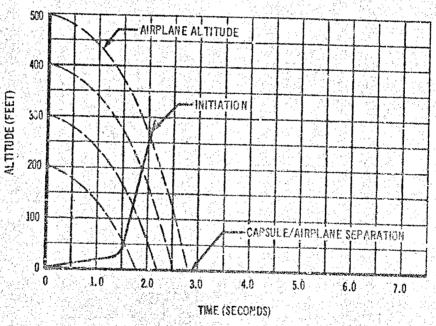


Figure 240. Three-Man Combined Capability Vehicle Low Alsitude Dash Mach 0.9 Cockpit Pod Capsule Mini.num Escape Alsitude -3.0 g Pushover

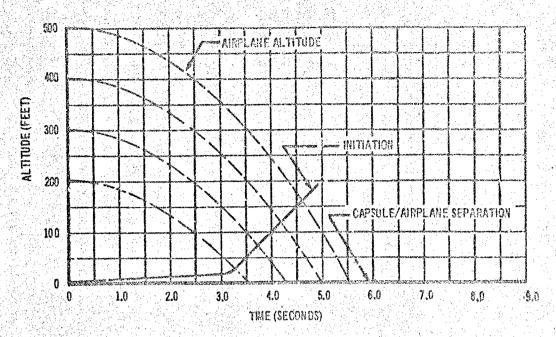


Figure 241. Three-Man Combined Capability Vehicle Low Altitude Desh Mech 0.9

Separable Nose Capsule Minimum Escape Altitude Zero g Fushover

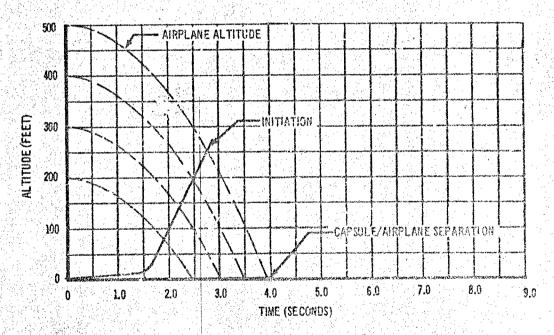


Figure 242. Three-Man Combined Capability Vehicle Law Altitude Dash Mach 0.9
Secrable Nose Capsule Minimum Escape Allitude -1.0 g Fushover

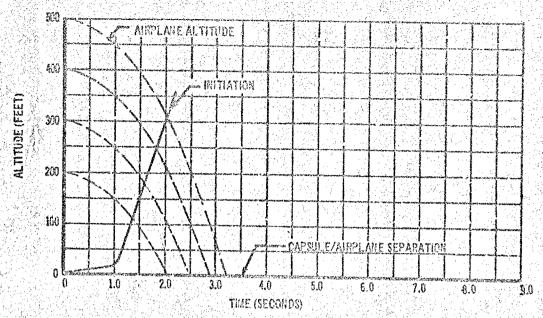


Figure 243. Three-Man Combined Copability Vehicle Low Allitude Dosh Mach 0.9 Separable Noze Copcule Minimum Escape Allitude -2.0 g Fushover

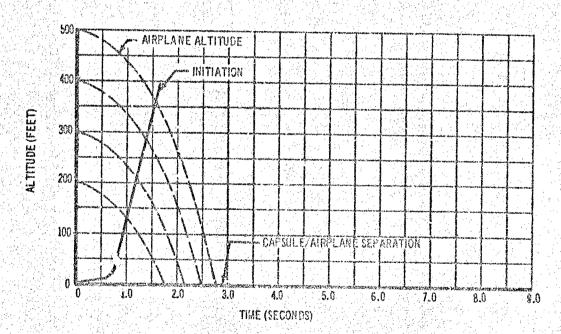


Figure 244. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 0.9 Separable Nose Capsule Minimum Escape Altitude -3.0 g Pushaver

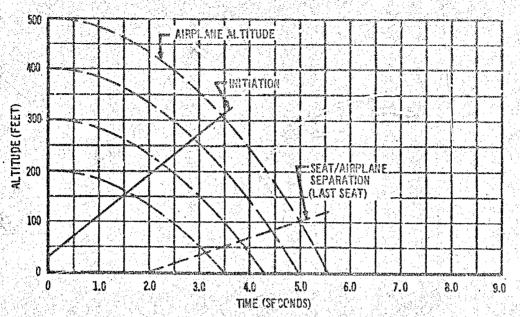


Figure 245. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.7 Open Ejection Seat Minimum Escape Altitude Zero y Pushover

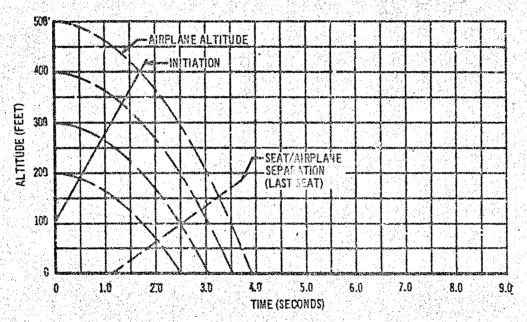


Figure 246. Three-Man Combined Capability Vehicle Low Altitude Dosh Mach 1.1

Open Ejection Seat Minimum Escape Altitude -1.0 g Pushover

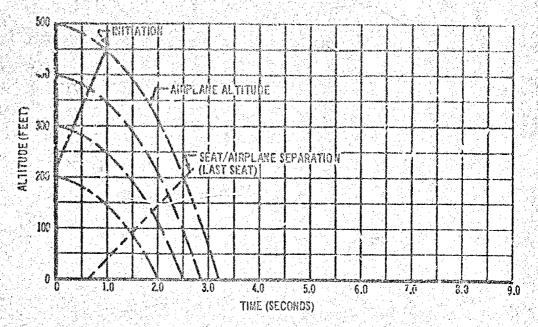


Figure 247. Three-Man Combined Copability Vehicle Low Altitude Bash Mach 1.1

Open Ejection Sect Minimum Escape Altitude -2.0 & Pushover

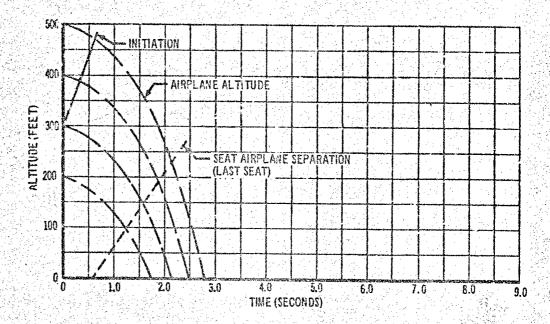


Figure 248. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Open Ejection Seat Minimum Escape Altitude -3.0 g Pushover

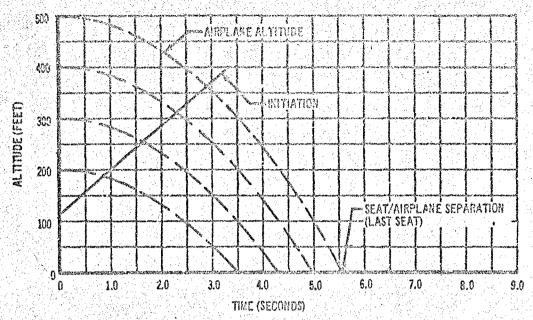


Figure 249. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Encapsulated Ejestien Seat Minimum Escape Altitude Zero g Pushover

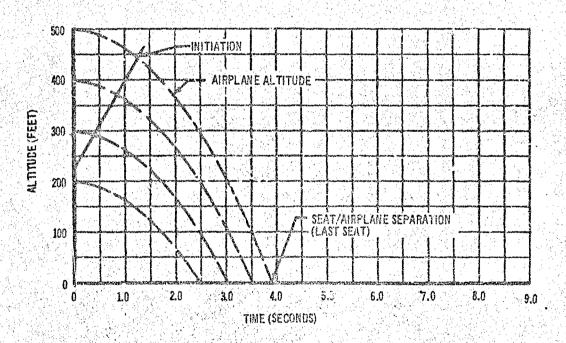


Figure 250. Yhree-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Encapsulated Ejection Sest Minimum Escape Altitude -1.0 g Pushover

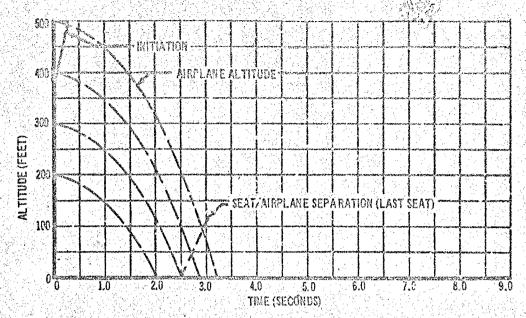


Figure 251. Three-Man Combined Capability Vehicle Lew Altitude Dash Mach 1.1 Encapsulated Ejection Seat Minimum Escape Altitude -2.0 g Pushover

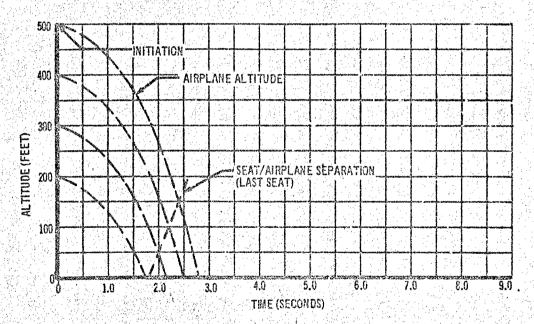


Figure 252. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Encapsulated Ejection Seat Misimum Escape Altitude -3.0 g Pushover

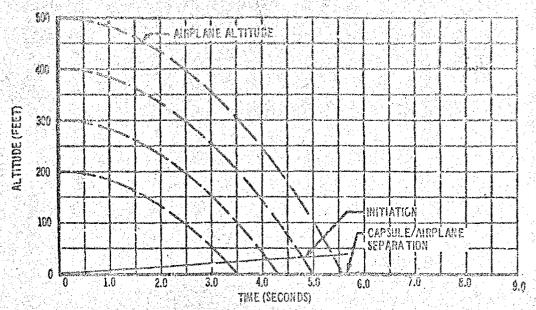


Figure 253. Threa-Man Combined Capability Vehicle Low Altitude Dash Hoch 1.1 Cockpit Ped Capaule Minimum Escape Altitude Zero g Pushavar

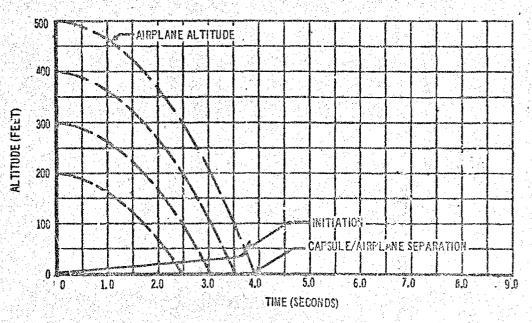


Figure 254. Three-Man Combined Capability Vehicle Law Altitude Dash Mac. 1.1 Cockpit Pod Capsule Minimum Escape Altitude -1.0 g Pushover

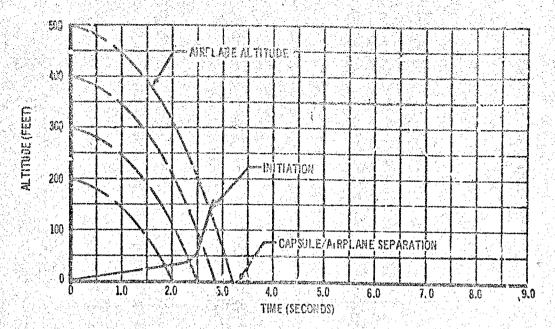


Figure 255. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Cockett Pod Capsule Minimum Escape Altitude -2.0 g Pushever

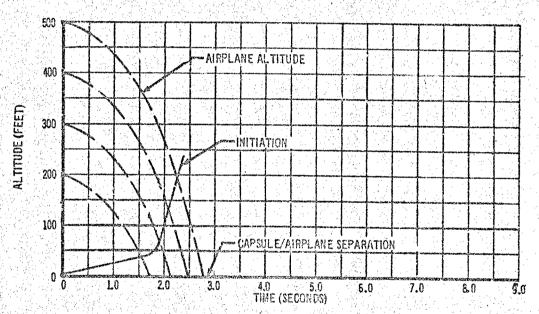


Figure 256. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Cockpit Pod Capsule Minimum Escape Altitude -3.0 g Pushover

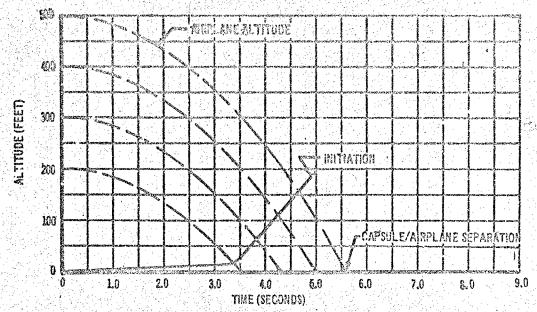


Figure 257. Three-Man Combined Capability Vehicle Low Altitude Bash Mach 1.1
Separable Nose Copsula Minimum Escape Altitude Zero g Pushover

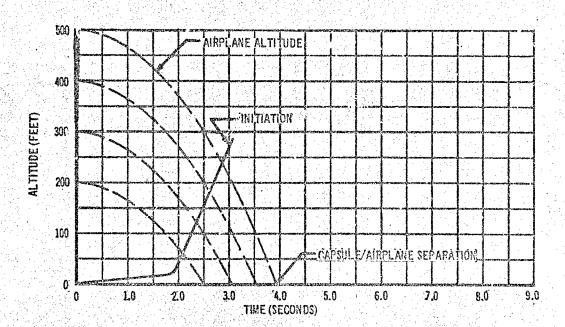


Figure 258. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Separable Nose Capsule Minimum Escape Altitude -1.0 g Pushover

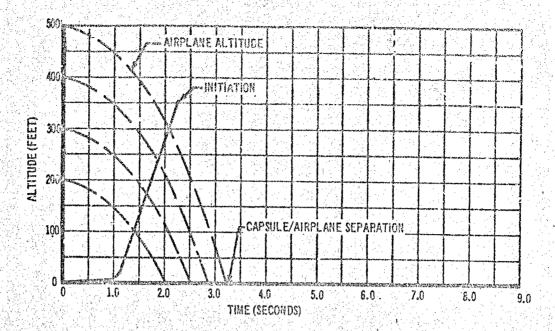


Figure 259. Three-Man Combined Capability Vehicle Law Altitude Dash Mach 1.1 Separable Nose Capsule Minimum Escape Altitude -2.0 g Pushover

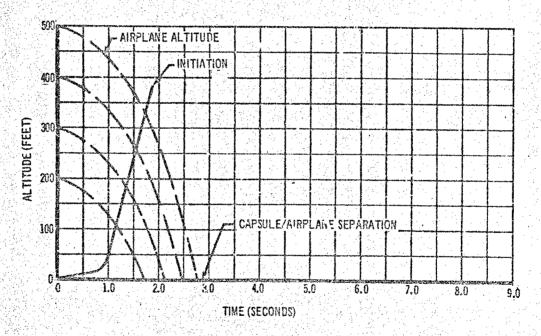


Figure 260. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.1 Separable Nose Capsula Minimum Escape Altitude -3.0 g Pushover

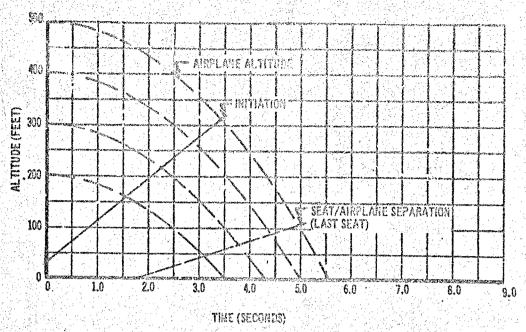


Figure 261. Three-Man Combined Capability Vehicle Law Altitude Dash Mach 1.2
Open Ejection Seat Min'mum Escape Altitude Zero y Pushover

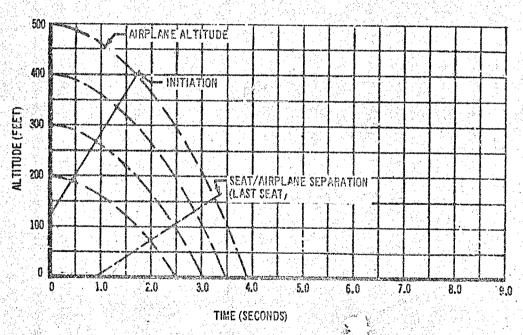


Figure 262. Three-Man Combined Capability Vehicle Low Afritude Dash Mach 1.2

Open Ejection Seat Minimum Escape Afritude -1.9 g Pushover

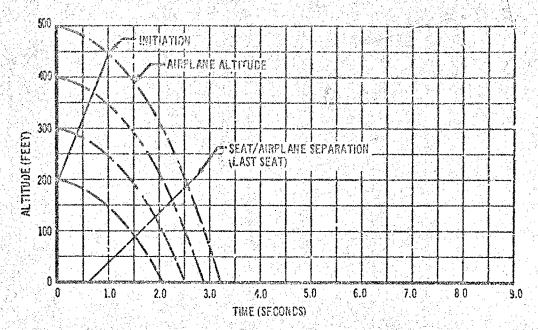


Figure 263. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.2

Open Ejection Seat Minimum Escape Altitude -2.0 g Pushover

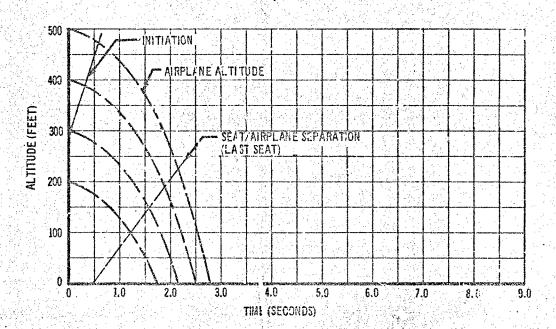


Figure 264, Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.2 Open Ejection Seat Mini num Escape Altitude -3.9 g Pushover

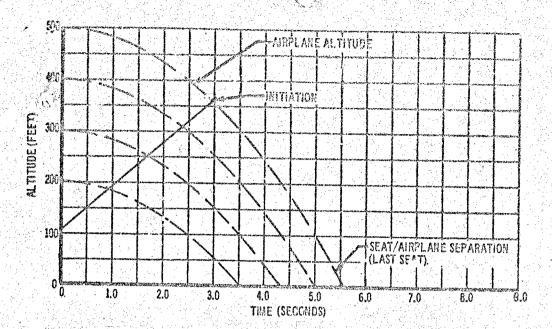


Figure 265. Three-Man Combined Capability Vehicle Law Altitude Dash Moch 1.2 Encapsulated Ejection Seat Minimum Escape Altitude Zero g Pushover

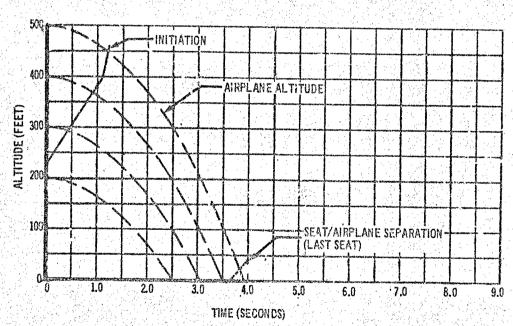


Figure 266. Three-Man Combined Capability Vehicle Love Altitude Dash Mach 1.2 Encapsulated Ejection Scat Minimum Escape Altitude -1.0 g Pushover

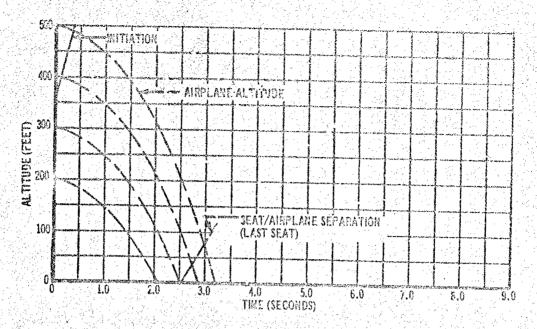


Figure 267. Three-Man Combined Capability Vehicle Low Afritude Dash Mach 1.2 Encapsainted Ejection Seat Minimum Escape Afritude -2.0 g Pushaver

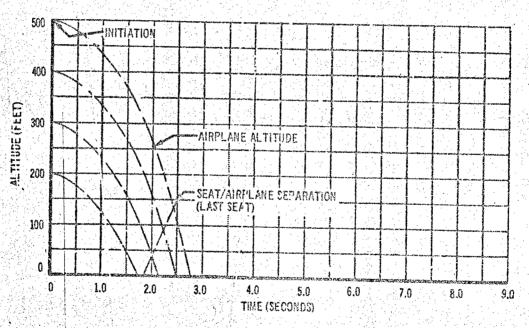


Figure 268. Three-Man Combined Capability Vehicle Law Altitude Dash Mach 1.2 Encapsulated Ejection Seat Minimum Escape Altitude -3.0 g Pushover

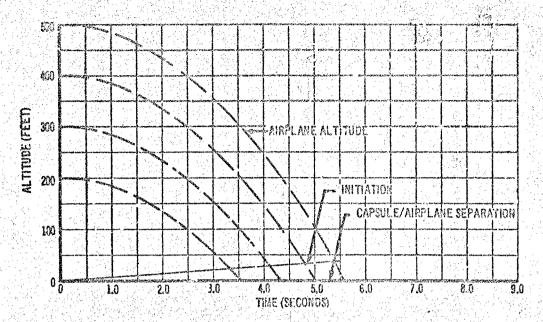


Figure 269. Three-Man Combined Capability Vehicle Low Altitude Dash Hach 1.2
Cockpit Pod Capsule Minimum Escape Altitude Zero a Pushover

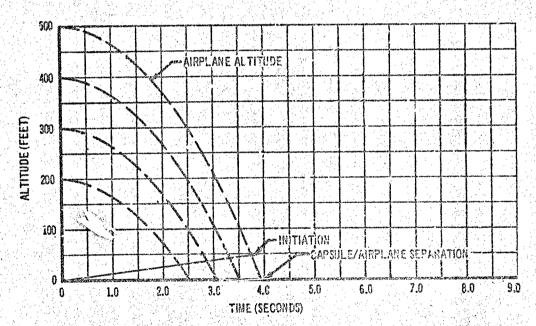


Figure 270. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 7.2.
Cockpit Pod Capsule Minimum Escape Altitude -1.0 g Pushaver

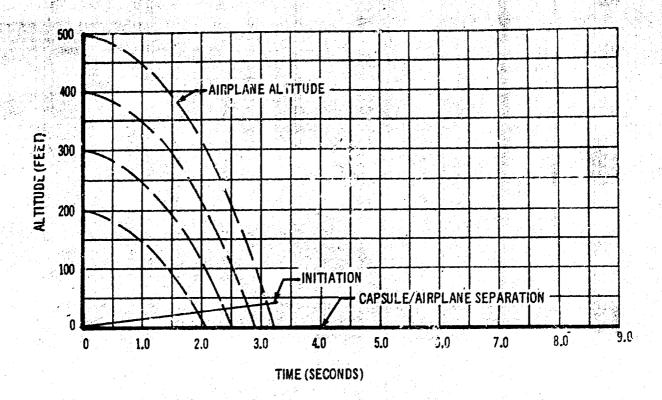


Figure 271. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.2 Cockpit Pod Capsule Minimum Escape Altitude -2.0 g Pushover

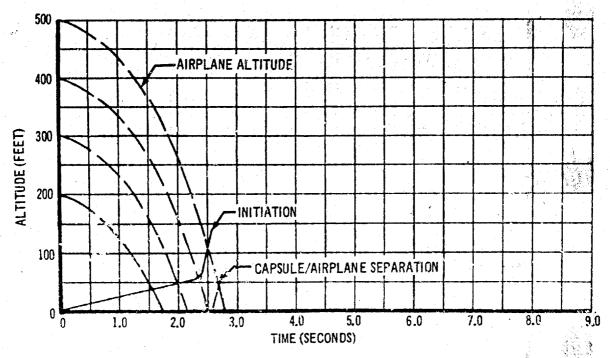


Figure 272. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.2 Cockpit Pod Capsule Minimum Escare Altitude -3.0 g Pushover

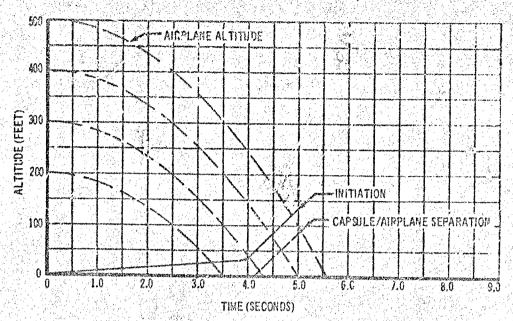


Figure 273. Three-Man Contined Capability Volicle Low Altitude Dash Mach 1,2 Separable Nose Capsule Minimum Escape Altitude Zer. y Pushover

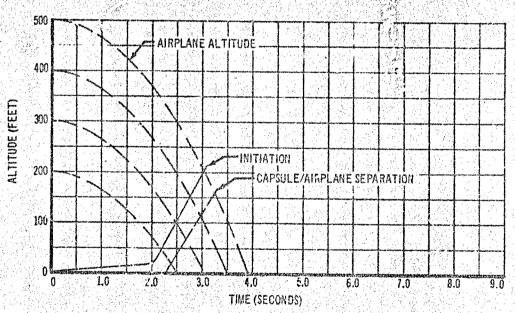


Figure 274. Three-Man Combined Capability Vehicle Lex Altitude Dash Mach 1.2 Separable Nose Capsule Minimum Escape Altitude -1.0 g Pushover

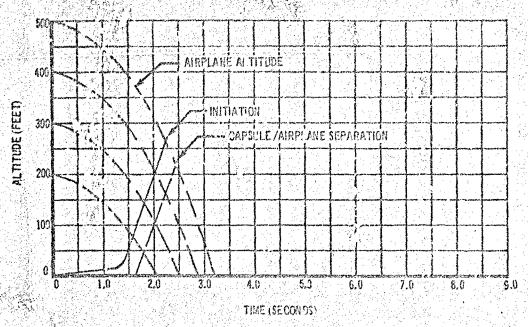


Figure 275. Three-Man Combined Capability Vehicle Low Altitude Dash Mach 1.2

Separable Nose Capsule Minimum Escape Altitude -2.0 g Pushover

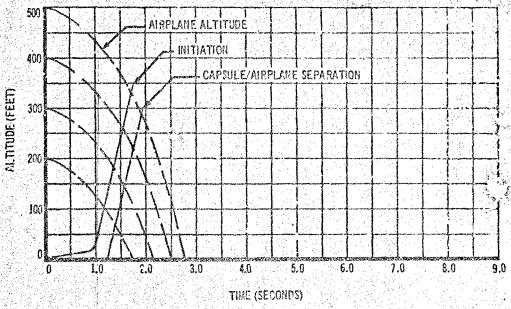


Figure 276. Three-Man Combined Capability Vehicls Low Altitude Dash Mach 1.2 Separable Nose Capsule Minimum Escape Altitude -3,0 g Pushover

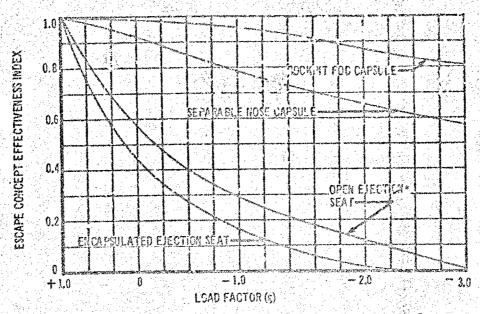


Figure 277: Three-Man Combined Capability Vehicle Low Altitude Dash Escape Concept Effectiveness Index Versus Normal Load Factor During Pushever, Fash 0.9

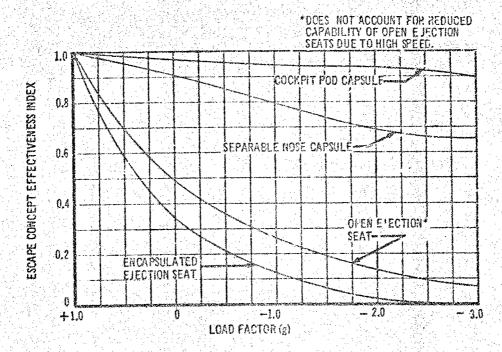


Figure 278. Three-Man Combined Capability Vehicle Law Altitude Doch Escape Concept Effectiveness Index Varsus Normal Load Factor During Pushover, Mach 1.1

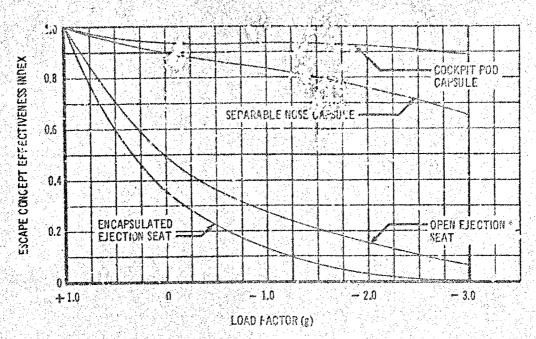


Figure 279. Three-Man Combined Capability Vehicle Low Altitude Dash Escape Concept Effectiveness Index Versus Normal Load Factor Buring Pushaver, ideah 1.2


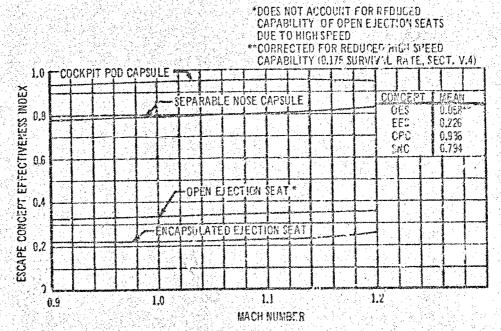


Figure 280. Three-Man Combined Capability Vehicle Escape Concept Effectiveness Versus Mach Number During Pushover at Low Allitude Dash

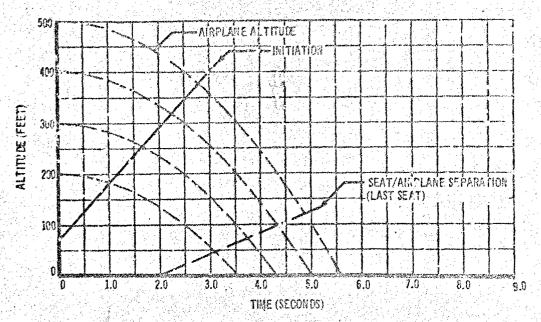

Figur. 281. Four-Man Supersonic Dash Vehicle Mach 0.9 Open Ejection Seat Minimum Escape Altitude Zero g Pushaver

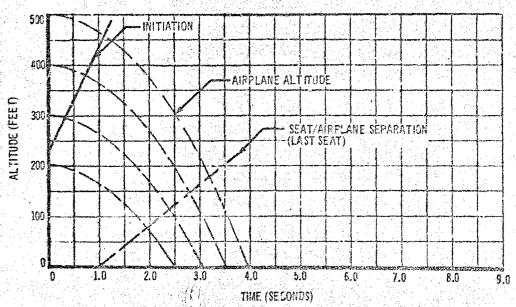


Figure 282. Four-Man Supersonic Dash Vehicle Mash 0.9 Open Ejection Sout Minimum Escape Altitude -1.0 g Pushover

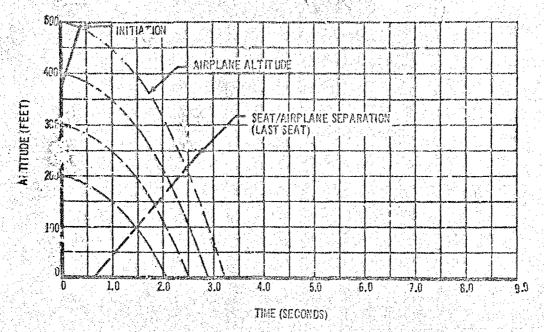


Figure 283. Four-Man Supersonic Dush Vehicle Mach 0.9 Open Ejection Seat Minimum Escape Altitude -2.0 g Pushaver

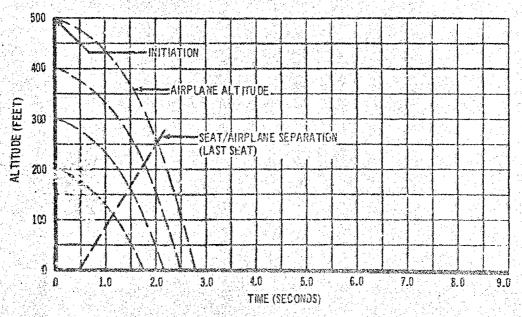


Figure 284. Four-Man Supersonic Dash Vehicle Much 0.9 Open Ejection Sect Minimum Escape Altitude -3.0 g Pushover

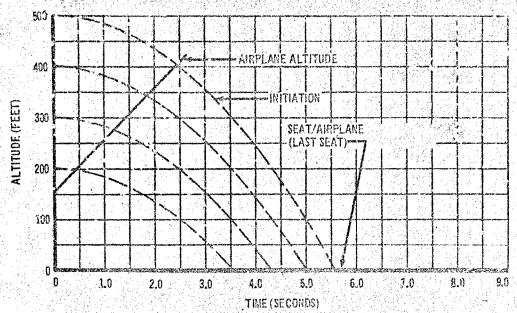


Figure 285. Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated Ejection Seat Minimum Escape Altitude Zero g Pushever

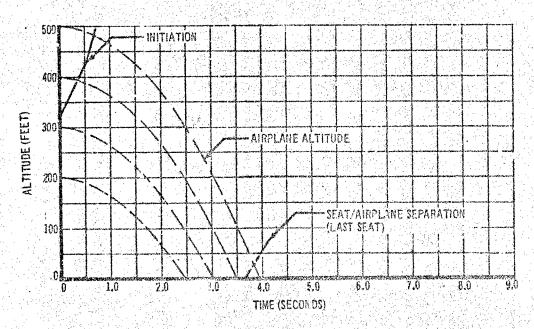


Figure 286. Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated Ejection Seat Minimum Escape Altitude -1.0 g Pushayer

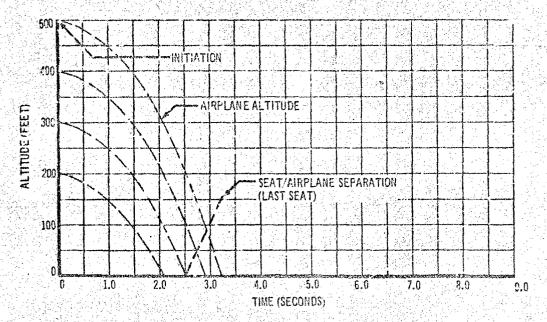


Figure 287. Four-Man Supersonic Dash Vehicle Mach 0.9 Encapsulated Ejection Seat Minimum Escape Altitude -2.0 a Poshover

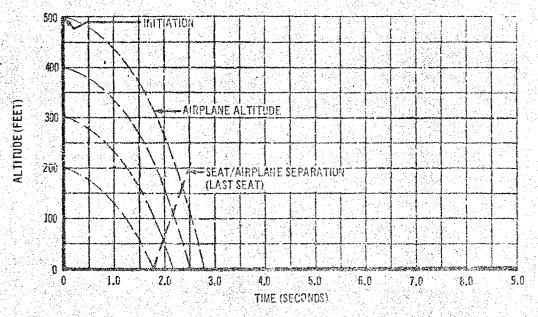


Figure 288. Four-Man Supersonic Dash Vehicle Mccl. 0.9 Encues wisted Ejection Seat Minimum Escape Allitude -3.0 g Pushover

251

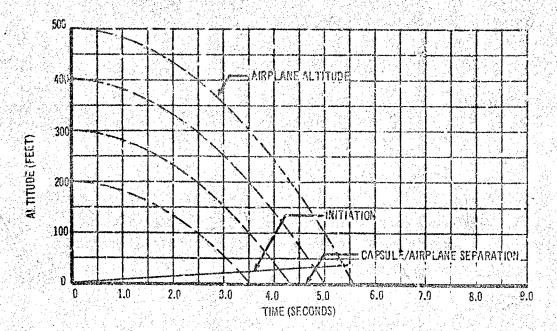


Figure 289. Four-Man Supersonic Dash Vehicla Mach C.7 Cockpit Pod Capsul-Minimum Escape Altitude Zero g Pushover

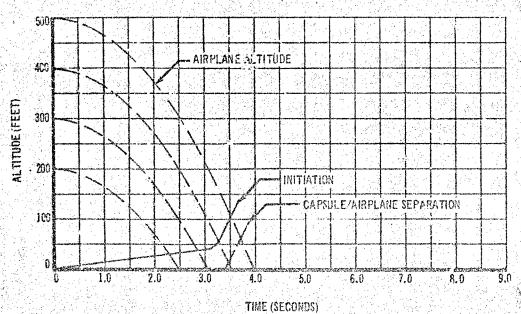


Figure 290. Four-Man Supersonic Dash Vehicle Much 0.9 Cockpit Pod Copsule Minimum Escope Altitude -1.0 g Pushover

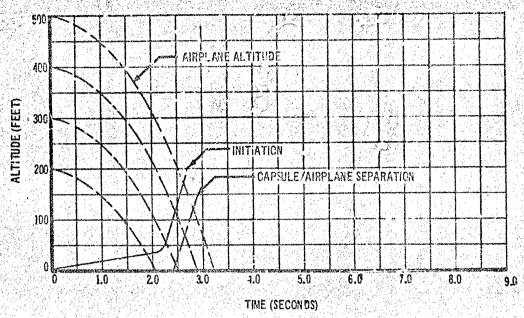


Figure 291. Four-Man Supersonia Dash Vehicle Mach 0.9 Cockpit Pod Capsule Minimum Escape Altitule -2.0 g Pushover


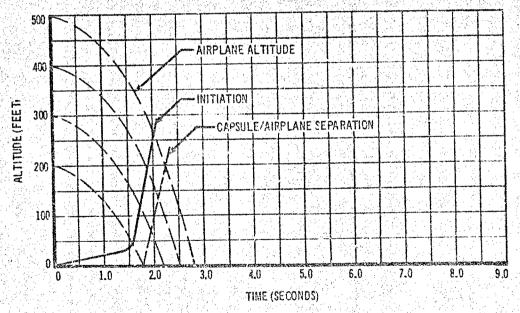


Figure 292. Four-Man Supersonic Dash Vehicle Mach 0.9 Cockpit Pod Capsule Minimum Escape Altitude -3.0 g Pushover

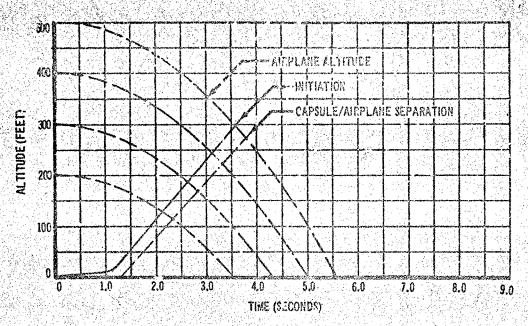

Sec. 4

Figure 293. Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose Capsule
Minimum Escape Altitude Zeza g Pushaver

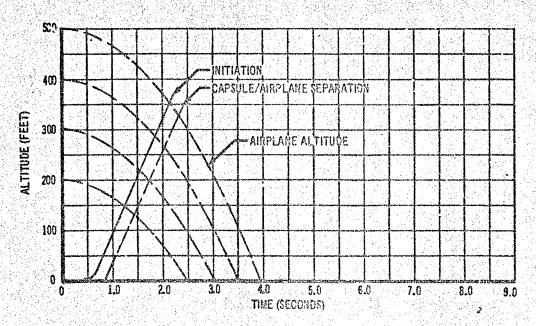


Figure 294. Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Nose Capsule
Minimum Escape Altitude -1.0 g Pushover

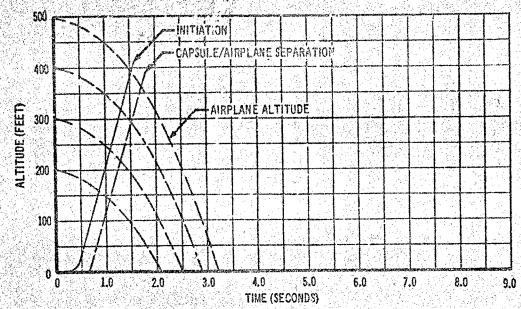


Figure 295. Four-Man Supersonic Dash Vehicle Mach 0.9 Separable Hose Capsule Minimum Escape Altitude -2.0 g Pushaver

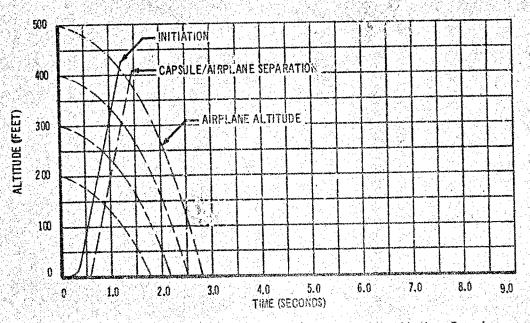


Figure 296. Four-Man Supersonic Dush Vehicle Mach 0.9 Separable Nose Capsule
Minimum Escape Altitude -3.0 g Pushaver

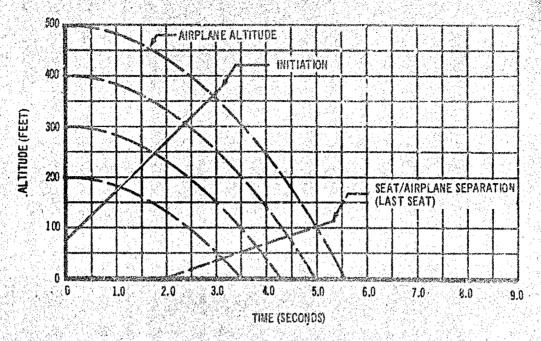


Figure 297. Four-Man Supersonic Dash Vehicle Mach 1.1 Open Ejection Scat Minimum Escape Altitude Zero g Pushover

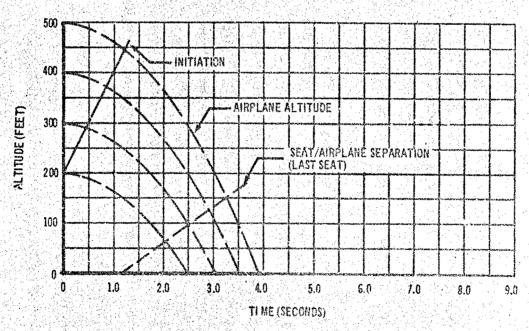


Figure 298. Four-Man Supersonic Dash Vehicle Mach 1.1 Open Ejection Seat Minimum Escape Altitude -1.0 g Pc hover

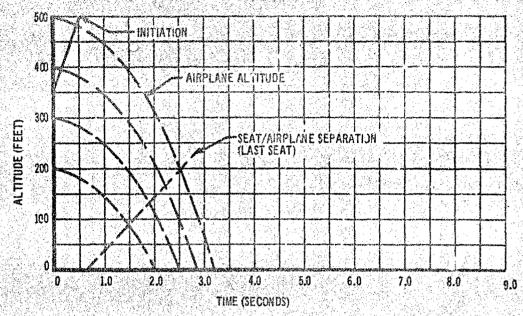


Figure 299. Fou:-Man Supersonic Dash Vehicle Mach 1,1 Open Ejsction Seat Minimum Escape Altitude -2.0 g Pushovet

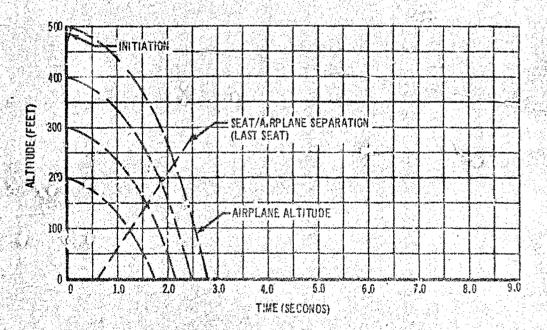


Figure 300. Four-Man Supersonic Dash Vehicle Mach 1,1 Open Ejection Szat Minimum Escape Altitude -3.0 g Pushover

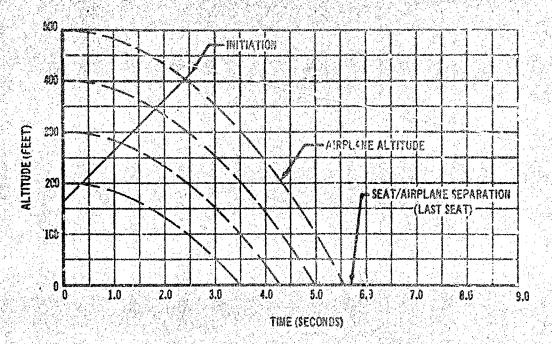


Figure 30%. Four-Mon Supersonic Dash Vehicle Mach 1.1 Encapsulated Ejection
Sest Minimum Escape Altitude Zero g Pushover

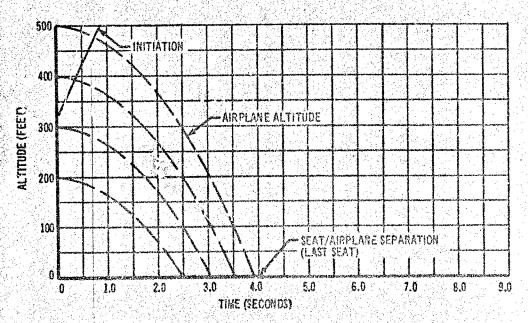


Figure 302. Four-Man Supersople Dash Vehicle Much 1.1 Encapsulated Ejection
Seat Minimum Escapa Altitude -1.0 g Pushover

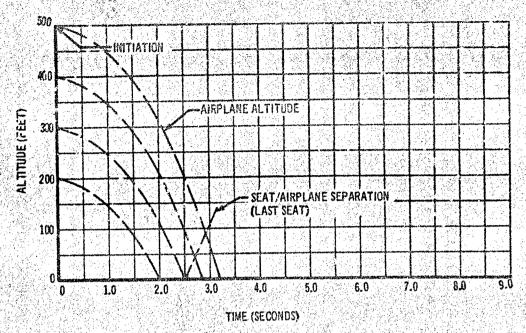


Figure 303. Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated Ejection Seat Minimum Escape Attitude -2.0 g Pushover

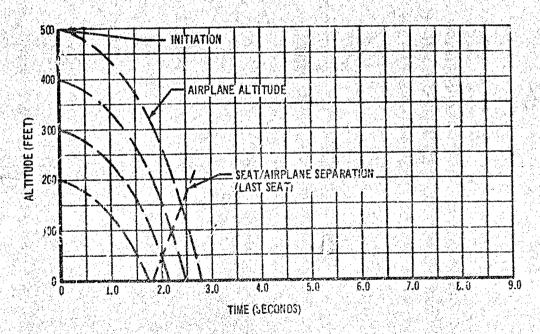


Figure 304. Four-Man Supersonic Dash Vehicle Mach 1.1 Encapsulated Ejection Seat Minimum Escape Altitude -3.0 g Pushover

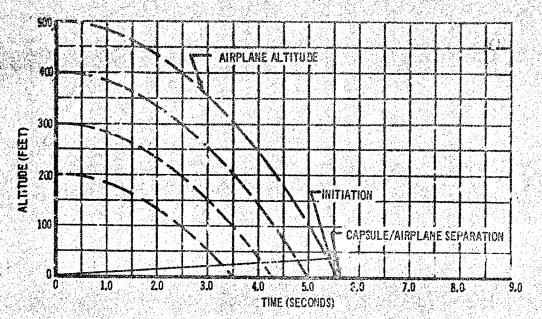


Figure 395. Four-Man Supersonic Dash Venicle Mach 1.1 Cockpit Pod Capsule Minimum Escape Altitude Zero g Pushover

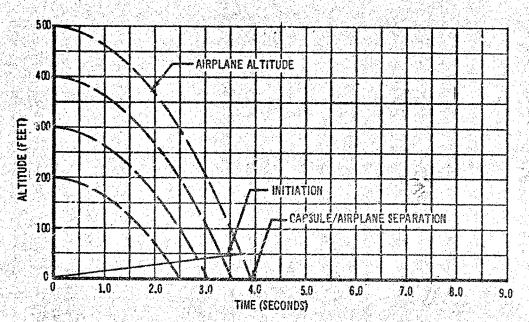


Figure 306. Four-Man Supersonic Dash Vehicle Mach 1,1 Cockpit Pad Capsule Minimum Escape Altitude -1,0 g Pusheves

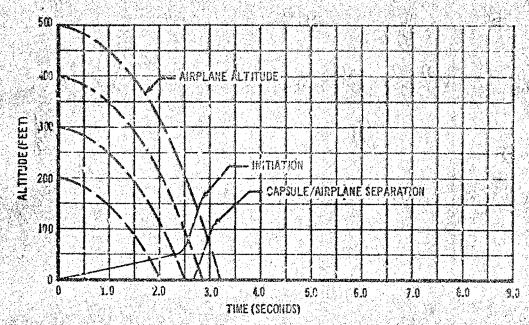


Figure 307. Four-Man Supersonic Dash Vehicle Mech 1.1 Cockpit Pad Capsule
Minimum Escape Altitude -2.0 g Pushaver

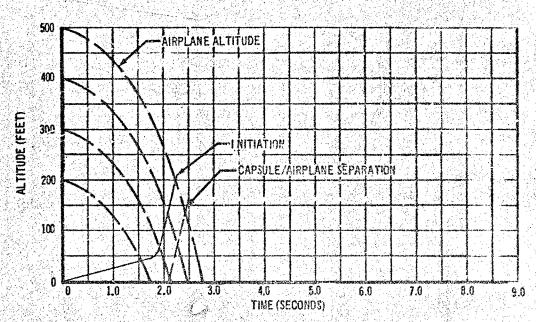


Figure 308. Four-Man Supersonic Dash Vehicle Mach 1.1 Cockpit Pod Capsule Minimum Escope Altitude -3.0 g Pushover

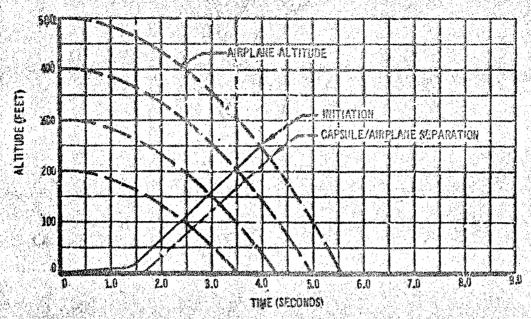


Figure 309. Four-Mon Supersonic Dosh Vehicle Moch 1.1 Separable Nose Capsula Minimum Escape Alitude Zero g Pushover

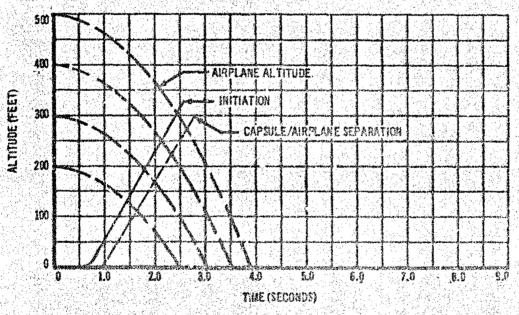


Figure 310. Four-Man Supersonic Dash Venicle Mach 1.1 Separable Nose Capsula Minimum Escapa Altituda - 1.0 g Puthover

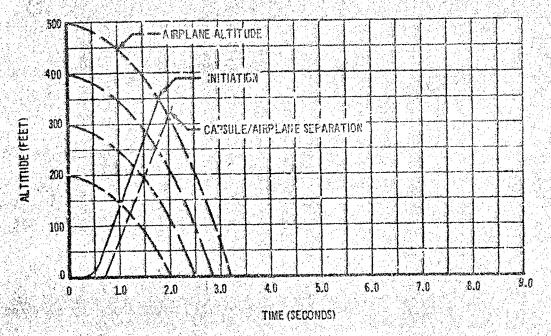


Figure 311. Four-Man Supersonic Doch Vehicle Moch 1.1 Separable Nase Capsule
Minimum Escape Altitude -2.0 y Pushover

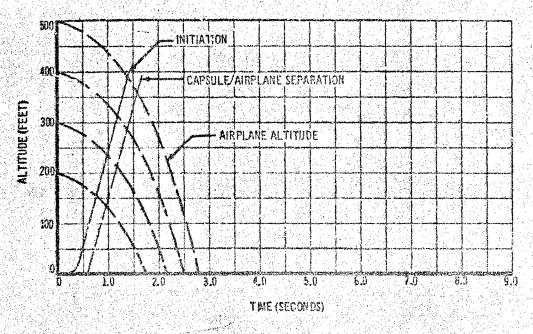


Figure 312. Four-Man Supersonic Dash Vehicle Mach 1.1 Separable Hose Cupsule Minimum Escape Altitude -3.0 g Pushover

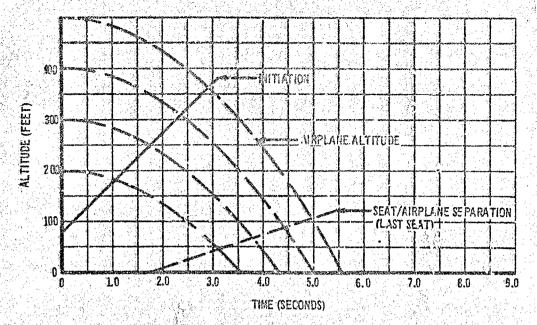


Figure 313. Four-Mai Supersonic Desh Vehicle Mach 1.2 Open Ejection Seat Minimum Escape Altitude Zero g Pushaver

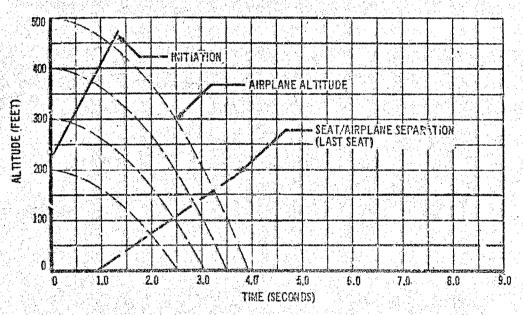


Figure 314. Four-Man Supersonic Dash Vehicle Mech 1.2 Open Ejection Seat Minimum Escape Altitude -1.0 g Pushover

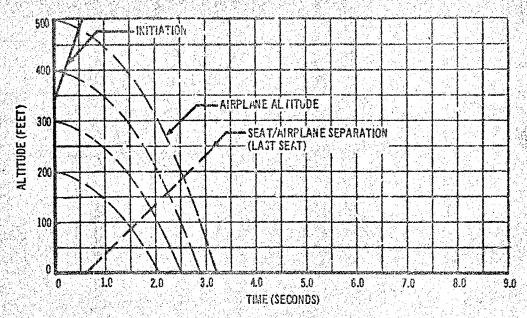


Figure 315. Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection Seat Minimum Escape Aititude -2.0 g Pushover

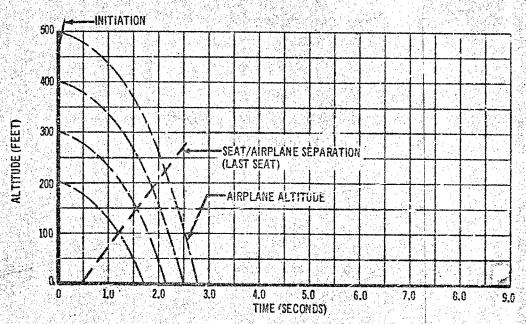


Figure 316. Four-Man Supersonic Dash Vehicle Mach 1.2 Open Ejection Seat Minimum Escape Altitude -3.0 g Pushover

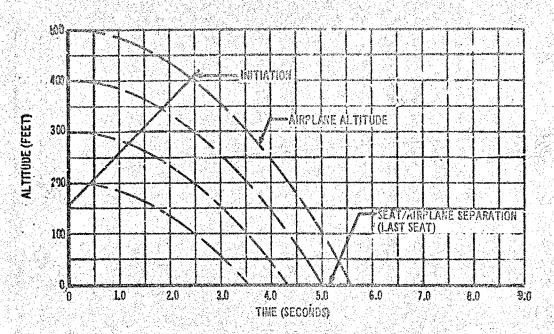


Figure 317. Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated Ejection
Seat Minimum Escape Altitude Zero y Pushover

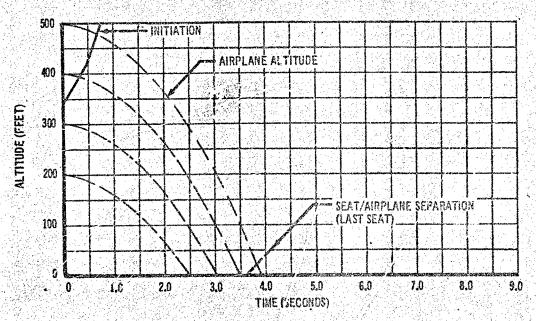


Figure 318. Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated Ejection Seat Minimum Escape Altitude -1.0 g Packover

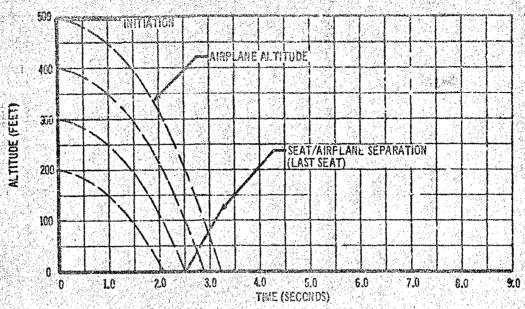


Figure 319. Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated Ejection
Seat Minimum Escape Altitude -2.0 g Pushovet

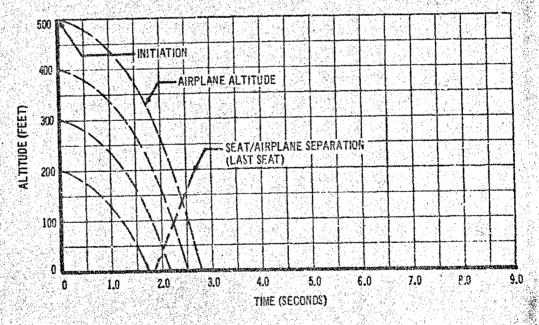


Figure 320. Four-Man Supersonic Dash Vehicle Mach 1.2 Encapsulated Ejection Seat Minimum Escape Altitude -3.0 g Pushover

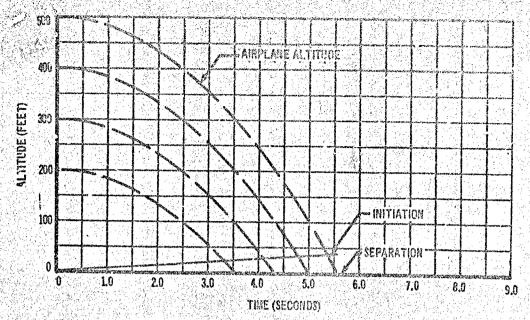


Figure 321. Four-Man Supersonic Dash Vehicle Mach 1.2 Cockell Ped Copsule Minimum Escape Allitude Zoio g Pushover

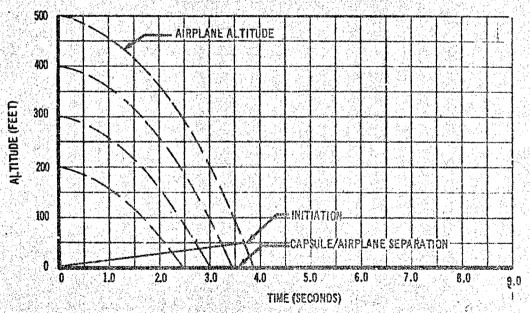


Figure 322. Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod Capsule
Minimum Escape Altitude -1.0 g Pushover

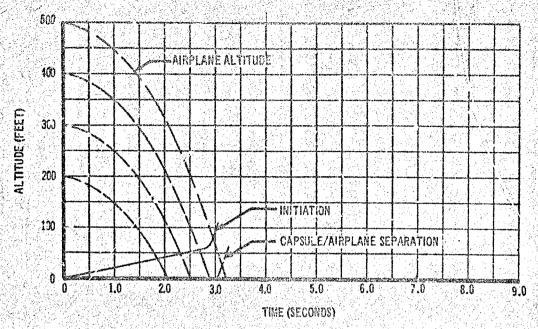


Figure 323. Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod Capsule Minimum Escape Altitude -2.0 g Pushover

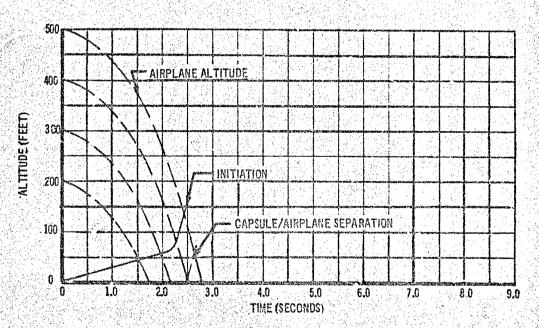


Figure 324. Four-Man Supersonic Dash Vehicle Mach 1.2 Cockpit Pod Capsule Minimum Escape Altitude -3.0 g Pushover

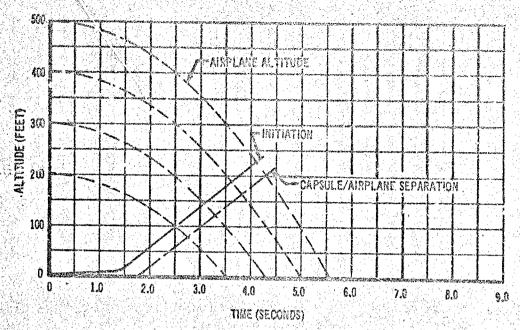


Figure 325. Four-Men Supersonic Dash Vehicle Mach 1.2 Separable Nove Capsule Minimum Escape Altitude Zere g Pushover

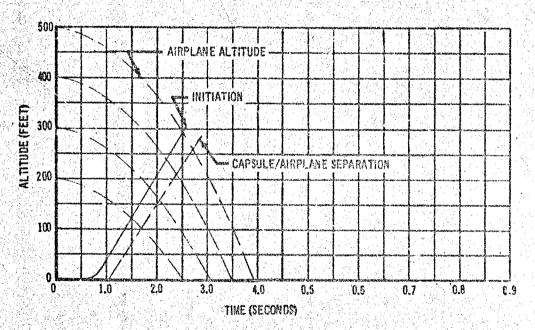


Figura 326. Four-Man Supersonic Dash Vehicle Mach 1,2 Separable Nase
Capsule Minimum Escape Allitude -1.0 g Pushover

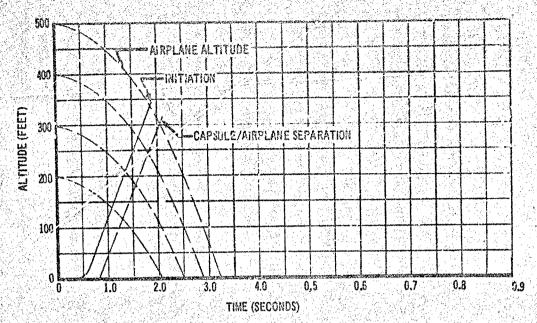


Figure 327. Faut-Man Supersonic Dash Vehicle Mach 1,2 Separable Nose Capsule Minimum Escape Altitude -2.0 g Pushover

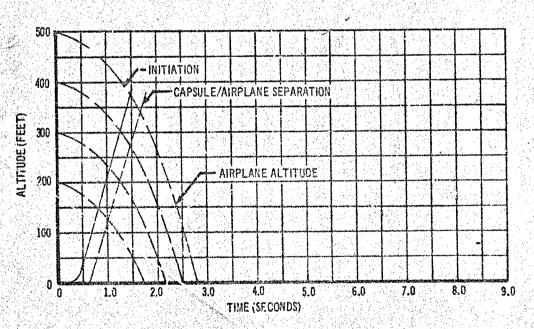


Figure 328. Four-Man Supersonic Oash Yehicle Mach 1,2 Separable Nose Capsule Minimum Escaps Altitude -3.0 g Pushover

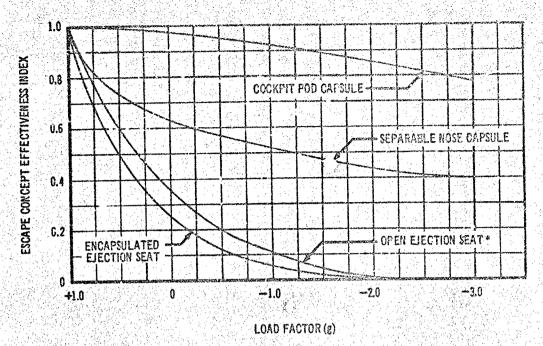


Figure 329. Four-Man Supersonic Dash Vehicle — Low Allitude Dash Escape Concept Effectiveness Index Versus Load Factor During Pushover , Mach 0.9

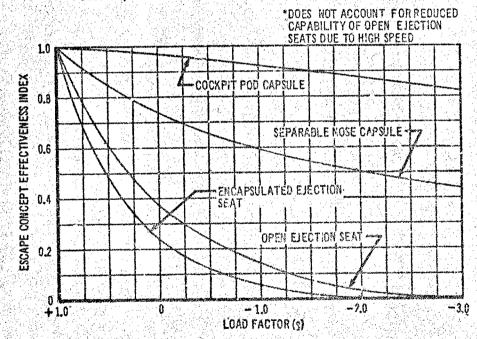


Figure 330. Four-Man Supersonic Dash Vehicle — Low Alitivde Dash Escape
Concept Effectiveness Index Versus Load Factor During
Pushover, Mach 1.1

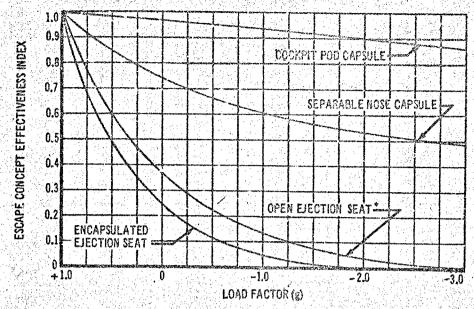


Figure 331. Four-Man Supersonic Dash Vehicle — Low Altitude Dash Escape Concept Effectiveness Index Versus Load Factor During Pushover; Mach 1.2

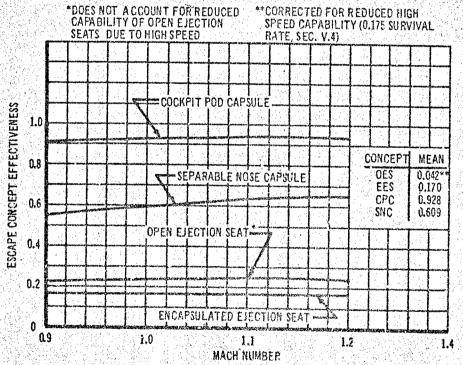
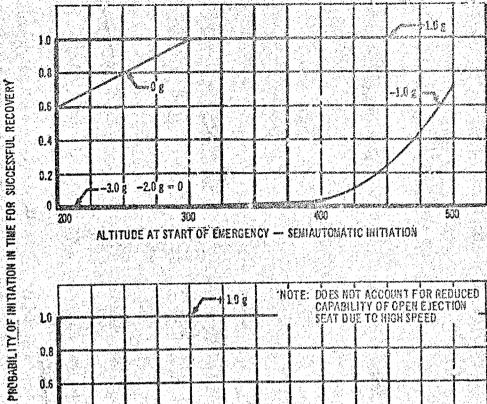


Figure 332. Four-Man Supersonic Dash Venicle Escape Effectiveness Versus

Mach Number During Pushaver at Low Altitude Dush



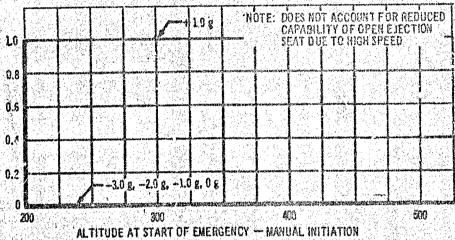


Figure 333. Probability of Successful Escape Versus Altitude Four-Man Vehicle Open Ejection Seats, Mach 0.9

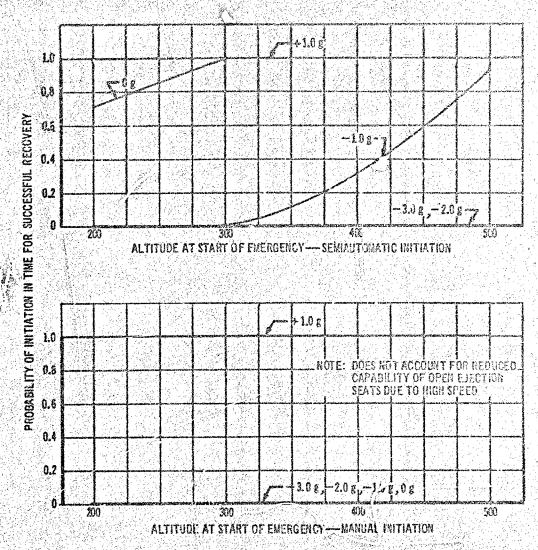


Figure 334. Probability of Successful Escape Volaus Altitude Four-Man Vehiclo with Open Ejection Spars, Hach 1.1

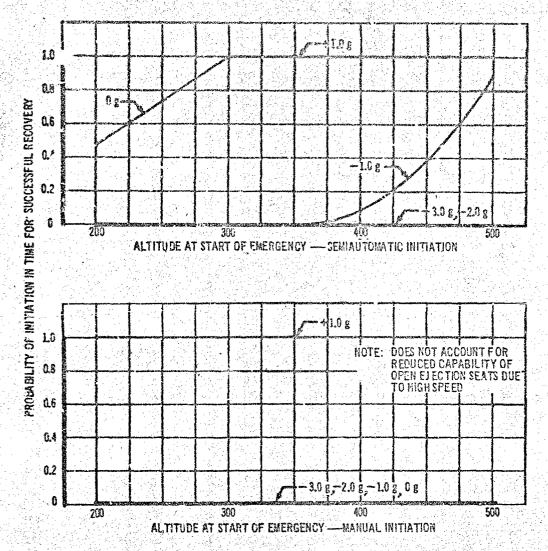


Figure 335. Probability of Successful Escape Versus Altitude Four-Man Vehicle with Open Ejection Seats , Mach 1,2

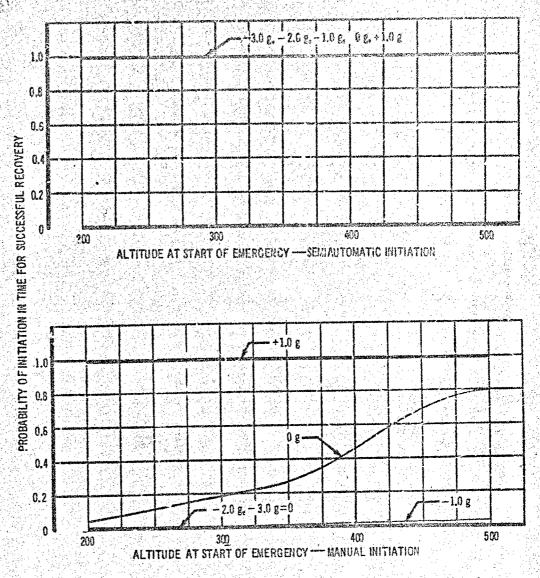


Figure 336. Probability of Successful Escape Versus Altitude Four-Man Vahicle, Cockpit Pod Capsule, Mach 0.9

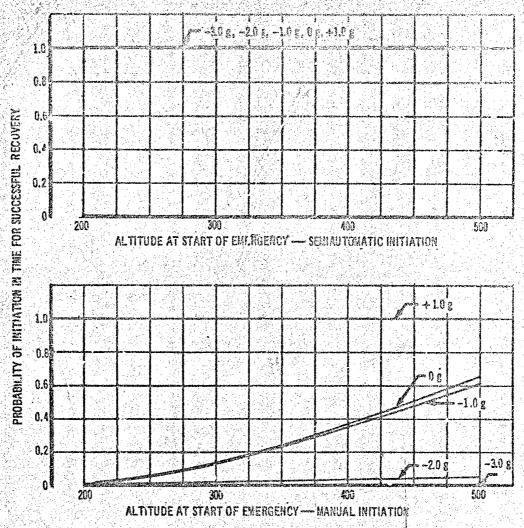


Figure 337. Probability of Successful Escape Versus Altitude Four-Man Vehicle, Cockett Ped Capsule, Mach 1.1

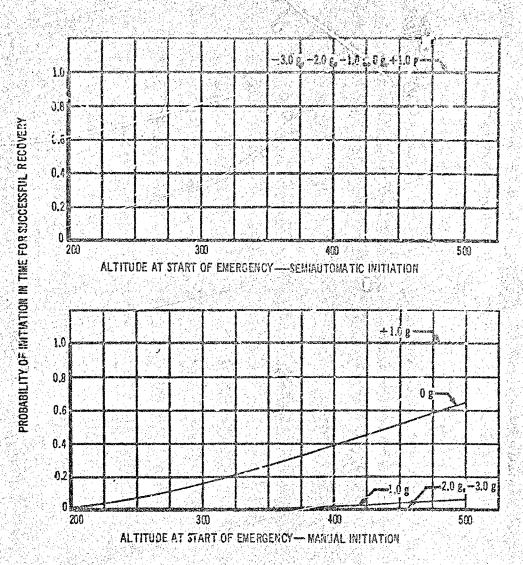


Figure 338. Probability of Successful Escape Versus Altitude Four-Man Vehicle, Cockpit Pod Capsule, Much 1.2

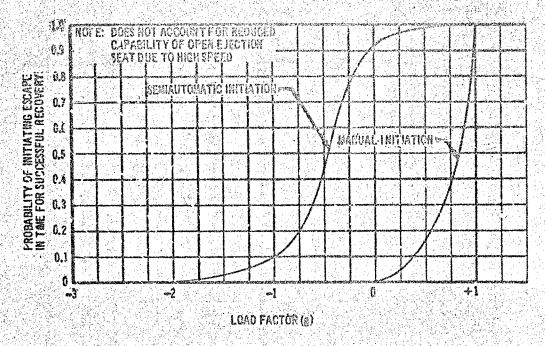


Figure 339. Four-Man Vehicle Open Ejection Sents Mach 0.9 Probability of Initiating Successful Escape Versus Pushovet g

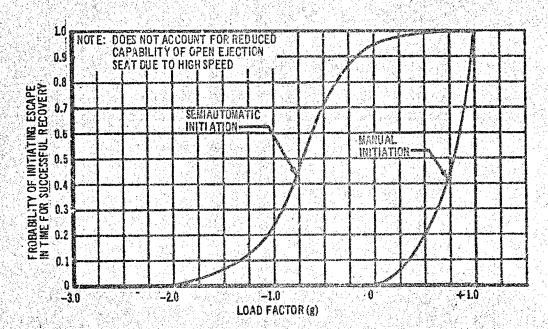


Figure 340. Four-Man Vehicle Open Ejection Seats Mach 1.1 Probability of Initiating Successful Escape Versus Pushover g

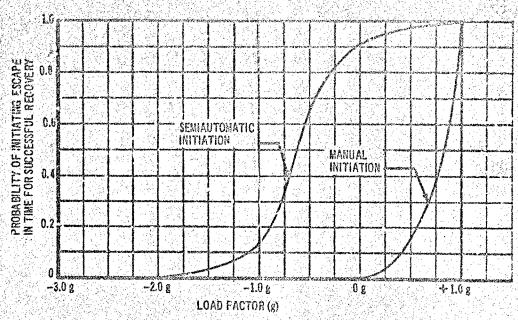


Figure 341. Four-dun Vehicle Open Ejection Seats Mach 1.2 Probability of Initiating Successful Escape Versus Pushover g

~

NOTE: DOES NOT ACCOUNT FOR REDUCED CAPABILITY OF OPEN EJECTION SEAT DUE TO HIGH SPEED

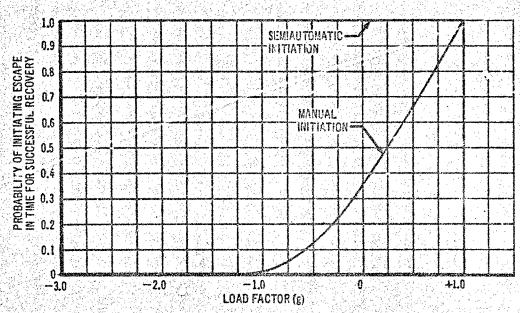


Figure 342. Four-Man Vehicle Cockpit Pod Capsule Mach 0.9 Probability of Initiating Successful Escape Versus Pushover g

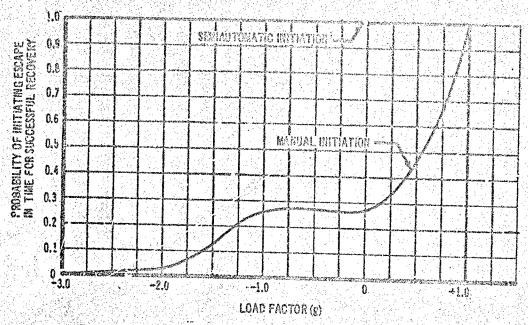


Figure 343. Four-tion Vehicle Cockett Pud Capsule Mach 1.1 Probability of Initiating Successful Escape Vorsus Pushover g

 $\mathcal{L}_{\mathcal{L}}$ 

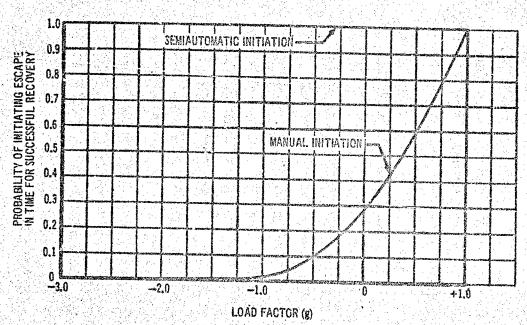


Figure 344. Four-Man Vehicle Cockpit Pod Capsulo Mech 1.2 Probability of Initiating Successful Escape Versus Pushover g

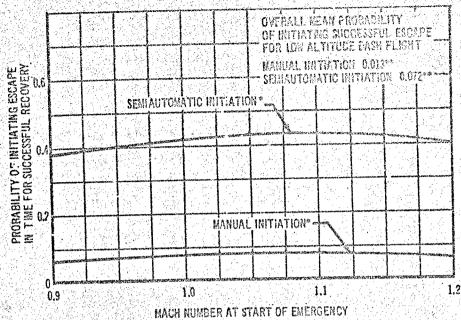


Figure 345. Four-Man Vehicle Open Ejection Seats, Probability of Successful Escape Versus Mach Number \*DOES NOT ACCOUNT FOR REDUCED CAP-\*\*CORRECTED FOR RE-DUCED HIGH SPEED CAPABILITY (0.175 ABILITY OF OPEN

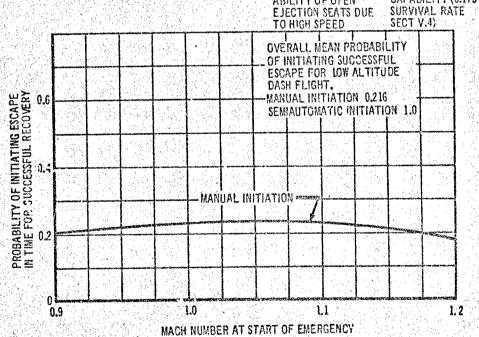


Figure 346. Four-Man Cockpit Pod Capsula Probability of Successful Escape Versus Mach Humber

### 4. HIGH ALTITUDE AND HIGH SPEED

Successful escape with respect to equivalent strapeed or "q" depends on the ability of the escape system to protect the crewmen from the effects of windblast, flailing, and intolerable y forces during high exced except. Belative to open ejection seats, reference 4 states that ejection at a "q" of 8.5 pm (600 knots KAS) is the threshold of fatal injury; however, in at least one case, there has been survival at 9.5 psi (640 knots EAS). Flailing seems to be the major contributing cause of high speed ejection fatalities; however, internal organ damage from crush type chest injuries, due to compression, was indicated as a possible cause of fatalities in extremely high-speed ejections. Further examination of the high speed ejection data reveals that at least four fatalities out of sever ejections were attributed to windblast effects. Based on these data, it was concluded that an open ejection seat with an improved restraini system would probably result in a 40 percent windblast fatality rate for ejectious between 600 and 650 knots EAS. Further, the rapid onset of windblast injuries as speeds increase above 600 knots indicates that survival will be very unlikely at speeds above 650 knots.

In regard to g-force injuries, it is noted from the escape system performance computations (Section III) that g-forces for the open ejection seats exceed allowable human tolerance limits for ejections above 600 knots. However, wird-blast is more critical and is the governing factor.

For the encapsulated seat, cockpit pod capsule, and separable nose capsule concepts, the crewmen will be protected from the effects of windblast and the computed g-forces do not exceed allowable human tolerance limits for escape at the maximum equivalent airspeed capability of the vehicles. Table XIII lists the estimated probabilities of successful escape with airspeed for the various escape concepts. Table XIV lists the percentage of the high speed envelope (600 to 800 KEAS) for each vehicle and escape concept in which the crewman will be protected from fatal injury due to wind blast.

Table XIII. Escape Concept Capabilities with Respect to Airspeed

		Probability of Survival				
Equivalent Airspeed, Knots	Open Ejection Seat	Encap- sulated Seat	Cockpit Pod Capsule	Separable Nose Capsule		
0 to 599	1.0	1.0	1.0	1.0		
600 to 649	0.6	1.0	1.0	1.0		
650 to 699	0.10	1.0	1.0	1.0		
700 to 800	0.0	1.0	1.0	1.0		

Table XIV. Percentage of High Airspead Envelope Protected by Various
Escape Concepts

		Speed Envelope Protected 800 KEAS)
Escape Concept	Two-man Subsonic VTOL Vehicle	Three-man Combir;d Capability Vehicle and Four-man Supersonic Dash Vehicle
Open Ejection Seat	Not applicable	17.5 percent
Ercapsulated Ejection Seat Cockpit Pod Capsule, and Separable Nose Capsule	Not applicable	100 percent

The primary requirements for high altitude escape are pressurization protection, low temperature protection, provision for a breathable atmosphere, initial escape system stability, and free fall stability. Each of the escape concepts as defined in Section III have the potential of providing high-altitude and free-fall stability. However, due to rocket plume effects in a rarefied atmosphere, advanced development in this area is indicated.

Concerning pressurization, temperature, and breathing requirements, cockpit pod and separable nose capsule concepts provide the most efficient protection. The encapsulated ejection seat protects the crewman at high altitude, but additional subsystems required at these altitudes are complex and less reliable. Open ejection seats require the use of pressure suits for ejections above 50,000 feet; and although adequate protection is provided, a substantial degradation of crew comfort and efficiency results. For the two-man subsoric VTOL vehicle, for which the altitude envelope does not exceed 50,000 feet, pressurization will not be required. However, for the open ejection seat concept, oxygen mask and pressure breathing provisions will be required. Table XV lists the estimated relative high altitude escape capability of each escape concept with respect to the performance envelopes of each vehicle

Table XV. High Altitude Escape Index

	High Altitu	de Escape Index
 Escape Concept	Two-man Subsonic VTOL Vehicle	Three-man Combined Capability Vehicle and Four-man Supersonic Dash Vehicle
Open Ejection Seats Encapsulated Ejection Seats Cockpit Pod Capsule Separable Nose Capsule	0.95 0.93 1.0 1.0	0.80 0.85 1.0 1.0

285 (286 BLANK)

# SECTION VI

#### ESCAPE CONCEPT TRADE DATA

The evaluation and selection of an appropriate excaps concept for specific types of future advanced military aircraft involves the consideration of many individual and interrelated factors. The factors that must be considered include: inflight escape capability relative to vehicle performance and usage; survival capability efter landing on land or water; escape system complexity. reliability, and maintainability; escape fysicin weight penalty; development and mamifacturing costs; the effect of the time required to develop and of developmental risk on the availability of the escape system; effect of the volume required to accommodate escape system components inside and outside the crew compartment on the overall airpland size and performance; effect of escape system cockpit layout requirements, vision, personal equipment, pressure suit and arctic clothing requirements, seating, and restraint requirements on shirts, sve environment and crew comfort and efficiency; and the effect of escape system hatch requirements (cabin pressure integrity), crash landing protection provisions, additional crewmembers aboard (without escape systems), and of protective encumbrances on overall crew flight safety.

Examination of the relationships between the various factors reveals that all the perfinent considerations may be expressed in terms of seven major trade factors. Figure 347 lists the major factors along with the considerations of each.

The following pages of this section summarize data from the preceding sections of the report and provide additional data pertaining to each trade factor. For each trade factor the various escape concepts are rank-ordered with respect to its suitability to the two-man subsonic VTOL vehicle, the three-man combined capability vehicle, and the four-man supersonic low-altitude dash vehicle.

The method of rank-ordering is to rate the most suitable concept at 1.0. The remaining concepts are rated less than 1.0 and represent a percentage degradation of the best.

238

Figure 347. Escape Concept Erolustian Factors

- EPPECT ON PLANT SARETY OF EXAMPL DYSTEM AND PROTECTIVE ENCINE CHARGES.

- EFFECT OF MICHONAL CREW MEMBERS

## 1. ESCAPE AND SURVIVAL POTENTIAL

# a. Inflight Escape Capability

Summarized in Table XVI are data from Section V pertaining to the effectiveness of the escape concepts to provide safe escape from disabled aircraft with respect to operations within certain critical flight regimes for each of the vehicle types considered. The flight regimes are VTOL hover and transition, conventional takeoff and landing, lew-altitude dash, and high-speed and altitude. The escape concept effectiveness indexes are rank-ordered within each flight regime to provide a basis for evaluation and selection of the most suitable concept for specific vehicles.

## b. Survival After Landing Capability

To protect the crewman following an inflight escape resulting in a survival situation on last or water, the escape system must keep the survivor affect, protect him from invironmental extremes, provide emergency rations and a means of obtaining food and water, provide equipment and clothing to maintain the survivor in good physical and mental condition, provide a means for assisting the survivor in taking evasive measures to prevent capture by the enemy, and provide communication and signalling devices to facilitate location and rescue. Further, the escape system should protect the crewman from injury that would tend to reduce his chance of survival during landing impact.

Review of USAF survival experience (1958 through 1963, Ref. 5) reveals that approximately 10 percent of the crewmen involved in known survival situations did not survive. Of these, approximately 77 percent of the fatalities occur following landings on water, 15 percent following landings on snow or ice, and 8 percent following landings on land. Due to the period of time covered, this data generally will be applicable to the open ejection seat escape concept. Cockpit pod and separable nose capsules will provide better protection against drowning (the major cause of water landing fatalities); better protection against exposure; will provide a greater quantity of survival equipment; will provide superior communication and location aids and are more readily visible, which will aid in search and rescue; will provide impact attenuation, reducing the chance of landing injuries; and will allow mutual assistance between crewmembers.

It is estimated that the capsule systems could prevent 90 percent of the water landing fatalities, 70 percent of the snow and ice landing fatalities, and 50 percent of the land landing fatalities associated with open ejection seat usage.

The encapsulated ejection seat provides better protection than the open seat, but is inferior to the capsule concepts. The estimated fatality rate for the encapsulated seat is 50 percent of the open ejection seat rate.

Table XVII presents estimated relative fatality rate comparisons for critical survival situations and rank-orders the escape concepts with respect to survival capability.

Toble XVI. Escape Cancept Effectiveness indox

					ET.4					Prist developing	
VEHICLE	ESCAPE		VIOL	CONVENTION TAKEOFF AND LANDING		ALTHUR ALTHUR DASH		HOR ALTITIDE	ë	E. C.	
		X3GNI	PANK	MDEX	RAME		TANT	MOEX	NA SE		
	S	0.773	0.364	6.733	0.924			6.93	6.83		
	8	0.583	c. 734	0,443	0.538 853			88	8.0		income sea
SUBSONIC I	S	0.759	÷.94.5	0.792	0			C			
3	Š	0.802	o. 	0.787	883 3	galace) periodicales e		e de la companya de l	c H	Fet neglym <del>akl</del> enske	
4-MAN	SEO			0.501	0.619	0.000	0.043	88.6	0.89	10 64 67	
SUPER	ğ			0.89.00 0.89.00	3.3	C	es e	8	69. 158.	G proj mantenato in	
S S	Ö			0.810	<b>.</b>	6	C)	c)	e H	gard gard	8.04
DASH	SNC			0 732	0.904	0.00	0.656	c. ri	<b>3</b>	6.7	
	Sigo Sigo	0.687	0.755	0.590	0.670	8	26.	9.89	8	13 5	
		0.512	0.582	9.356	9.404	88.0	e e	8	က တ	© 	gers gers
	8	0.973	0.953	0.843	9.958	8	C	0	0	Angle	grons general construction
CAFAMILIE	SNC	6.911	1.0	0.880	1.0	100	0.845	1.0	7.0	The same of the sa	
								1 1 1 1 1 1 1 1 1			

# Table AVII. Forvivel Conellity

Ì		A A. A	36		Ali Victoria
	Burnaga	t Fatel	too for	in print	Grain i
	MUTTIVE	d Blioati	上乡 红绿色	即指	RANGL:
		n Ljecti			. At Jacket
ė.	4010 July 23	of \$46 - And J. Vic. 80 2	cares marie	7.10-33	Sec. 12.

AN MARKET NAMES AND AND AND THE PARTY OF THE PROPERTY OF THE PROPERTY OF THE PARTY	to me falte de la constante et a la constante et a	Service of Company of	and the second second		
	7.	me of Surfac			Bunk
Escape Concept	Water	Ice/Snow	Lanci	Total	Order Rating
Open Ejection Seat Encapsulated Ejection Seat	77.0 38.5	15.0	8.0 4.0	100.0	0.16 0.32
Cockpit Pod Capsule Separable Nose Capsule	7.7	4.5 4.5	4.0 4.0	16. 2 16. 2	1.0 1.0

## c. Escape Concept Reliability

The reliability of an escape system to function as designed is primarily dependent upon the integrity of the particular design, the extent of developmental and qualification testing to which the system is subjected, level of quality control during manufacture, level of maintenance applied, and simplicity and maintainability of the basic concept.

In evaluating the reliability of projected escape concepts it is presumed that equal effort and skill will be expended toward design, development, qualification, manufacturing, and maintenance. The relative reliability of escape concepts as opposed to specific system designs is, therefore, chiefly a function of concept simplicity and maintainability. To evaluate the relative rimplicity or complexity of the various concepts, the number of essential functions required by each concept to complete the escape sequence was considered. The essential escape sequence functions were based on the concept definitions from Section III and are as follows:

# Open Ejection Seat Concept

- e Initiation
- Torso positioning
- Hatch jettison
- Rocket catapult ejection
- DAKT stabilization
- Drogue chute deployment
- Personnel barness release
- Recovery parachute depiniment
- Seat-man separation
- Ejection sequencing functions\*

# Encapsulated Ejection Seat

- e Initiation (encommulation system)
- e Leg retraction
- e Torse positioning
- e Door closure
- e Catapult firing trigger
- e Hatch jettison
- e Rocket catapult ejection
- e Stabilization booms deployed
- Stabilization chute deployed
- e Stabilization chute disreefed
- e Recovery parachute deployed
- · Recevery parachute disreefed
- Impact system deployed
- Ejection sequencing functions

# Cockpit Pod and Separable Nose Capsules

- Initiation
- e Crew restraint
- Stabilization booms deployed
- Stabilization chutes deployed
- Capsule/vehicle separation
- e Rocket thrust
- Stabilization chutes disreefed
- Main parachutes deployed
- Main parachutes disreefed
- e Capsule repositioning
- Impact system deployed

Comparison of the essential escape functions, complexity and maintainability of the open ejection seat and encapsulated ejection seat concepts indicate that the encapsulated ejection seat will be to some degree less reliable than the open ejection seat concept. The encapsulated seat concept requires the additional functions of leg retruction, encapsulation or door closure. catapult firing trigger actuation, stabilization boom deployment, stabilization and recovery parachute disreefing functions, and landing system deployment Functions required by the open sent which are not required by the encapsulated seat are DART stabilization, personnel harness release, and seat-man separation. Torso positioning, required by both systems, is more complex for the encapsulated seat because the entire seat bucket probably will have to position forward of the clam shell body (B-70 type) to provide acceptable vision and access to flight controls and equipment during normal flight, and is retracted into the clam shell for ejection. The encapsulated ejection seat as defined in Section III requires two separate motions by the pilot to initiate escape. These are: 1) raising the handgrip which closes and pressurizes the clam snell (required for emergency pressurization when escape is not mandatory); and 2) squeezing the catapult trigger for actual ejection. This introduces an additional human element into the escape sequence and could result in a significant decrease in escape reliability. Further, due to the additional complexity of the encapsulated ejection seat concept, maintenance errors that would adversely affect system reliability are more likely.

Cockpit pod and separable nose capsule concepts require a greater number of generally more complex functions for escape than the open ejection seat concept. The capsule must be severed from the aircraft by a linear shaped charge system. Stabilization is more critical to successful escape, and reliable functioning of the two stabilization booms and parachutes is essential. Parachute reefing is required and the larger capsules require multiple main recovery parachutes (which detract from system reliability) as opposed to the single recovery parachute for ejection seat systems. Also, the capsule concepts require capsule repositioning and landing impact system deployment which are not required by the open ejection seat concept. Functions required by the ejection seat concept and not required by the capsule concepts are hatch jettisoning, DART stabilization, harness release, and seat-man separation. Also, ejection sequencing functions are required to prevent rocket-catapult blast injuries and to reduce the possibility of seat collisions or parachute entanglement.

Due to continual use and exposure of ejection seat systems to flight crews and ground personnel these systems are more vulnerable to critical damage and harder to maintain than the capsule concepts. Also, reliable functioning of ejection seat systems is dependent on proper "nockup" by flight personnel. Capsule system components will not be exposed, and once installed will require minimal maintenance.

Although the capsule concepts are basically more complex than the open ejection seat concepts, they are considered slightly more reliable due to their higher degree of maintainability, and because ejection seats are vulnerable to damage, and depend more on flight personnal. Also, there is the possibility of parachute entanglement.

To provide a basis for estimating reliability of each escape concept, USAF ejection experience from January 1961 to December 1963 (Ref. 6) was studied. These data deal with ejection seat equipment failures during ejection that resulted in fatalities by violent contact with the ground. Table XVIII lists the numbers of personnel involved and causes of ground impact fatalities. Of 601 ejections, 100 were fatal and 73 of the fatalities were caused by violent contact with the ground.

Table XVIII. Factors Contributing to Ground Impact Fatalities

Ejection attempted outside p	erformance envelope of 30
Delayed decision to eject	1. 기술 : [1] (12 - 12 - 13 - 14 - 15 - 15 - 15 - 15 - 15 - 15 - 15
Held onto seat actuating con	trols 3
Equipment failure/difficulty	그림 가수 하려면 있는 것으로 함께 되었다. 그렇게 하는 것이 없는 것이다. 
Failed to use available equip	oment 8
Seat/chute entanglement	1
Miscellaneous	2
	73

The percentage of equipment failure is therefore  $\frac{6}{601} = 1.5$  percent, and the probability of successful escape system operation is 0.085 for open ejection seats.

Based on the preceding discussions and comparisons of escape concept complexity and maintainability, the estimated reliability for cockpit ped and separable nose capsule escape concepts is 0.990, and for encapsulated ejection seats it is 0.975. Table XIX shows the rank-order rating for each concept.

Table XIX. Escaps Concept Functional Reliability

	Escape Concept	Functional Reliability	Rank-Order Rating
E	Open ejection seat	0.985	0,995
	Encapsulated ejection seat	0.975	0,985
	Cockpit pod capsule	0.900	1,0
	Jeparable nose capsulc	0.990	1,0

#### 2. COST

The budgetary development costs listed in Table XX are based on 1968 dellars, 30 months' development time of the first flight article, use of existing test recording equipment, major test parts taken from production lines, and the assumption that each test program will be part of the airplane production program. The development and qualification programs used as a basis for these cost estimates are defined in Section IV.

Table XX. Development/Qualification Cost Summary

Vehicle	Concept	Dev/Qual Costs	Rank-Order Rating
Two-man subsonic VTOL	OES	2,144,996	1.00
	EES	10,151,258	0.211
	CPC	16,000,969	0.134
	SNC	17,058,278	0.126
Four-man supersonic dash	OES	3,609,429	1.0
	EES	11,678,412	0.309
	CPC	25,020,563	0.144
	SNC	27,921,134	0.130
Three-man combined capability	OES	2,615,338	1.0
	EES	10,640,801	0.245
	CPC	18,546,453	0.140
	SNC	20,075,743	0.130

#### 3. WEIGHT PENALTY

Table XXI shows the comparison of escape system hardware weights from Section III. These weight penalties represent the weight of escape, survival, and protection system components and installation requirements, less weight of crew with normal clothing and equivalent weight of basic nonejection seats. The actual weight penalty incurred as a result of incorporating an escape system could be substantially more than just the escape system bardware weight because of the interrelation of airplane structural requirements and airplane mission degradation, which, in turn, would be reflected in cost increase.

As an example, it would be expected that the relatively heavy escape system hardware in the cockpit pod capsule would cause some degradation in mission performance. If this mission degradation is unacceptable, then additional fuel will be required. Carrying more fuel will necessitate larger fuel tanks (hence more structure and larger landing gear), increased thrust needed to meet takeoff requirement, etc., and, consequently, increased costs.

The escape system hardware weights in Table XXI, then, serve as baseline data to use as a guide in estimating the effect on aircraft performance, structure, and cost. The rank-order rating listed in Table XXI was obtained by ratioing, for a given vehicle, the weight of the lightest escape system to the other escape systems. This procedure results in the lightest weight system receiving a rank-order rating of 1.0 and the heavier system's receiving a rank-order rating between 0 and 1.3, with the heaviest system having the smallest rank-order rating.

Table XXI. Weight Penalty

					<u> </u>
1		OES	EES	CPC	N SNC
1		Rank-	Rank-	Rank-	Rank-
1		Order	Order	Order	Order
١		Lb Rating	Lb Rating	Lb Rating	Lb Rating
	2-man Subsonic	392 1.0	1238 0.317	1589 0.246	2042 0.192
	3-man Combined	588 1.0	1857 0.317	2809 0.209	3634 0.166
	4-man DASH	784 1.0	2476 0.317	3674 0.220	6488 0.121

#### 4. VOLUME PENALTY

Taile XXII shows the volume penalties incurred by incorporating an escape system. These penalties result from vehicle enlargements required to accommodate the escape system. Defining volume penalty in this manner is considered to be more meaningful than merely summing the volumes of escape system components, because an increase in cockpit volume results in additional airplane wetted area and structure. This causes the weight and drag to increase, which, in turn, causes aircraft performance degradation and cost increase. Elimination of the performance degradation may be accomplished by providing more fuel, greater engine thrust, etc., which increases weight and cost.

The cost increase resulting from the volume penalty is similar to that resulting from the weight penalty. However, in one case the effect is the result of escape system weight, whereas, in the other case, the effect is the result of the cockpit volume increase required to accommodate the system (irrespective of the system weight).

Table XXII volumetric penalties are based on the four-man supersonic dash vehicle values for which a detailed study was made. The penalties for the two- and four-man vehicles were estimated from the four-man vehicle values.

The volume penalties for open ejection seats or encapsulated ejection seats in the three-man vehicle were estimated to be the same as the four-man vehicle. The reasoning behind this is: 1) the airplane fuselage cross-section at the pilots' station must be enlarged to accommodate the seats (this cross-sectional enlargement is not dependent upon whether or not additional seats are behind the pilots); and 2) the extra length required in the cockpit is attributed primarily to the side view dimensions of the seats, and, therefore, does not depend on whether or not a fourth man is positioned beside the third man. The volume penalties for the cockpit pod capsule or separable nose capsule for the three-man vehicle were estimated to be slightly less than for the four-man vehicle because for these escape systems the volume penalty depends primarily on rocket size, parachute sizes, boom dimensions, etc.

The volume penalties for open ejection seats or encapsulated ejection seats in the two-man vehicle were estimated to be approximately one-half of those for the three-man vehicle. This reasoning is based on: 1) the tandem seating arrangement results in a fuselage cross-sectional area increase at the pilots' station approximately one-half of that in a side-by-side arrangement; and 2) the extra length required in the tandem cockpit will be the same as for a three-man vehicle because the length increase is primarily dependent upon the side view dimensions of the seats, and not whether a man is sitting beside the pilot. The volume penalties for the cockpit pod capsule or separable nose capsule for the two-man vehicle were estimated to be somewhat less than for the three-man vehicle because for these escape systems the volume penalty is primarily dependent upon rocket size, parachute sizes, boom dimensions, etc.

The excape system volume penalties in Table XXII may be used as a baseline in aircraft design and in estimating the effect on aircraft performance, structure, and cost. Table XXII also shows the volumetric penalty rank-order rating for each escape concept for each vehicle.

Table XXII. Volume Penalty

٠.		and the second of the second	10 11 11 11 11 11 11 11 11 11 11 11 11 1		
		OES Rank- Order Ft <sup>3</sup> Rating	EES Rank- Order Ft <sup>3</sup> Rating	CPC Rank- Order Ft <sup>3</sup> Rating	SNC Rank- Order Ft <sup>3</sup> Rating
	2-man Subsonic 3-man Combined 4-man DASH	75 1.0 154 1.0 154 1.0	200 0.375 410 0.375 410 0.375	150 0.500 200 0.769 219 0.703	175 0.429 225 0.685 250 0.615

### 5. AVAILABILITY

The overall effectiveness and usefulness of an eccape system depends on whether the system is available, proven, and operational in time for use in the first prototype or production simplene for which the system is designed. The time required to design, develop, and qualify the escape system and the degree of developmental risk involved are factors which affect the availability of the escape concepts. It is presumed that any of the escape concepts can be developed to meet their particular designed performance as defined in Section III in unlimited time is available. The development risk factor, therefore, pertains to whether the system can be developed within the time schedule anticipated.

The time required for predevelopment, development, and qualification testing from Figures 109, 110 and 111 of Section IV are summarized for each escape concept in Table XXIII. The rank-order rating of the development time requirements is also shown.

Since open ejection seats currently available or under development will meet the limited design performance as defined, and since well established and proven testing techniques and procedures only are required, no development scheduling risk is considered to be involved. The open ejection seat concept is, therefore, assigned a development risk factor of 1.0.

Encapsulated ejection seat escape systems have been developed for the B-58 and B-70 aircraft. Also, studies and experimental test programs have been conducted by government and industry on this concept. Therefore, a sound basis exists for successful development of an encapsulated ejection seat system for advanced aircraft. However, additional capability, not available in present systems, is required. Also, system complexity imposes a slightly greater development time risk than for open ejection seats.

Cockpit pod and separable nose capsule escape concepts have been under study by government and industry for approximately twelve years, and several significant experimental test programs have been accomplished. Further, an operational cockpit pod type system has been successfully developed for the F-111 aircraft. The feasibility of developing these concepts for future aircraft has been demonstrated. However, development of these concepts for specific vehicles may present problems peculiar to the aircraft for which the system is developed.

The estimated developmental time risk factors are shown in Table XXIII.

To obtain the escape concept availability rank-order rating (also shown on the Table) the development time rank order is multiplied by the development risk factor.

	Development	Development Time Rank-	Development	Availability
Escape Concept	Time	Ordered	Risk	Renk-Order
	Months	Rating	Tactor	Rating
OES	21	1,0	1,0	1.0
EES	33	0.637	0,95	0.605
CPC	40	0.525	0,85	0.446
SNC	40	0.525	0,80	0.420

# 6. CREW COMFORT AND EFFICIENCY

The human engineering evaluation of the four escape systems for the two-, three-, and four-man venicles placed prime emphasis on the following aspects of crew comfort and efficiency:

- e Cockpit layout and design for crew effectiveness;
- Adequacy of external vision:
- Personal equipment integration and crew comfort;
- Seat design for comfort and efficiency;
- Windblast and deceleration forces;
- e Ejection sequencing time.

A discussion of these factors, summarized in Table XXIV is presented below.

Cockpit Design — Crew compartment design is optimized in the cockpit pod capsule and separable nose capsule permitting maximum cockpit volume usable for efficient arrangements. In this escape system there is no seat ejection clearance required. Therefore, crewmembers and instrument panels and consoles may be arranged and integrated for maximum operational efficiency.

Encapsulated and open ejection seat systems compromise crew station design and result in impaired crew comfort and efficiency. Both systems impose restrictions on the efficient arrangement of flight equipment due to the requirement for invivable hatches, fixed ejection rails, and seat clearance enveloped during incition. Due to the bulk involved, these two systems restrict that i shalling.

Visible—, he four escape systems (open seat, encapsulated seat, separable nose caps its and cockpit ped capsule) under study do not differ significantly, with the restricted of the exception of the sides and upward will be somewhat restricted it a B-58 type escape capsule is used. This is due to the retracted shell configuration. However, if a B-70 type capsule in which the seat occupant sits well forward of the capsule shell during normal operations is used, vision is comparable to the other two escape systems.

Table XXIV. Escupe System Summary

Factors	Open Ejection Seat	Encapsulated Ejection Seat	Cockpin Separable Fod Capsule Nose Capsule
Cockpit Design	Design for comfort and effi- ciency is limited due to ejection envelope, removable hatches, ejection rails	Design for comfort and efficiency is limited due to ejection envelope and rails, removable hatches, restricted seat positioning	Design for comfort and efficiency is most flexible
External Vision	No Comfort or efficiency degradation unless pressure suits (helmet, visors) are required	Restricted vision due to shell configuration	No efficiency or comfort degradation unless pressure suits (belmets, visors are required
Personal Equipment	Degraded comfort and efficiency; pressure suits, protective clothing, life vests, food, medical, oxygen requirements	Comfort and efficiency is good – essentially "shirt-sleeve" environment	Comfort and efficiency is excellent, unless pressure suffs are employed as back up for depressurization
Seat Design	Design for comfort and efficiency is limited due to ejection envelope requirement	Design for comfort and efficiency is least floxible due to ejection envelope and capsule shell restrictions	Design for comfort and efficiency is most flexible
Windblast & Deceleration	No protection from windhlast, poor protection from g-forces (tumbling and deceleration)	Good protection from wind- blast, limited escape envelope due to g-forces (tumbling and deceleration)	Maximum protection from g-forces (numbling and deceleration) and windblost
Ejection Sequence Time	Excessive time required between escape initiation and seat/airplane separation for crews of three or more.	m escape infliation and seat/ if three or more.	Reduced time lapse from escape initiation to separation for crews of two or more.

If pressure suits are worn, vision to the sides and upward will be somewhat restricted. In addition, pilots wearing pressure suits, because of face-plate glare and interference, can encounter visual problems such as degradation in target acquisition and scope interpretation. Furthermore, high humidity can fog the face plate.

Personal Equipment — The cockpit pod capsule and separable nose capsule ejection systems provide a "rhirt sleeve" environment in all cases except cabin depressurization above 50,000 feet. In this case, either an emergency pressurization system or pressure suit is required. The encapsulated ejection seats will provide secondary pressurization protection without the use of pressure suits. Thus, a "shirt sleeve" environment is essentially achieved. Open ejection seats require pressure suits if the escape envelope exceeds 50,000 feet and 1100Q (dynamic pressure) because, in this system, man is directly exposed to the environment during escape. Elimination of the pressure suit relieves the crewman of a primary encumbrance and permits greater crew comfort and efficiency, and less fatigue.

Protective clothing provides physiological protection at the expense of mobility, ease of control manipulation, visibility, and comfort. Pressure suits evoke small to quite large degradations, depending on the conditions and task requirements, in the crewman's performance. Gross tasks such as knob turning and lever pushing are little affected by the unpressurized suit. However, pressurization introduces cumbersomeness and fatigue. Performance of tasks of finer resolution show a dexterity decrement, the amount of which depends on whether the suit is inflated or not. F-106 pilots have reported that restricted mobility while wearing pressurized suits made it difficult to actuate fuel switches, armament recycle buttons, M-A-1 power switches, and manually tune the UHF radio. Pilots wearing pressure suits have also found that glare from the helmet visor and the effort required to turn their heads were factors contributing to fatigue and lower efficiency.

Examination of sweat patterns on pressure suits worn for three hours or longer has indicated that ventilation is generally not adequate. Because of the difficulty to urinate normally while wearing a pressure suit, urination in the suit is not uncommon. Because of this and extended use, the suits soon become odorous and untenable. To date, no competent cleaning procedure has been devised to overcome this problem.

Light-weight to heavy-weight antiexposure suits that are fully effective within established temperature limits are presently available. The degree of comfort, mobility, and performance provided by antiexposure suits is inversely proportional to the weight of the garment. Light to medium weight suits have been accepted by pilots, but the heavier suits have not been well received due to ventilation requirements, degradation of mobility and performance, etc.

Survival gear, such as life vests, oxygen equipment, food, medical supplies, etc., introduce serious problems by encumbaring the airman's movements in open seat ejection systems. The encapsulated seat, the cockpit pod, and separable nose systems allow for the design of such survival gear and other protective provisions into the capsule or cockpit pod itself. The

open seat, however, limits the placement of such awkward equipment to the man-seat complex.

Seats and Restraints — Design for comfort and efficiency is most flexible in the cockpit pod capsule and separable nose capsule ejection systems. This flexibility results from the lack of a restricting clearance envelope during escape, and it permits the incorporation of methods and devices (size, arm rests, reclining or rotary action, etc.) designed to alleviate fatigue and provide maximum comfort. In the open ejection seat and encapsulated seat systems flexibility is greatly limited because of the clearance envelope required during ejection. The encapsulated seat is further restricted because the seats must be placed within the capsule.

The restraining equipment for crewmen required by the open seat, encapsulated seat, cockpit pod, and separable nose systems are essentially the same.

Windblast and Deceleration Forces — Windblast presents no problems to crewmembers in the encapsulated seat, cockpit pod capsule, or separable nose capsule escape systems. However, in an open ejection seat, windblast can cause severe human injury. Open and encapsulated ejection seat systems are limited to approximately 500-600 KEAS (dynamic pressure of 1200 psf) and 700-800 KEAS (dynamic pressure of 1600 psf) respectively. This is due to tumbling or because deceleration forces approach human tolerance limits. Capsule-type systems provide better aerodynamic qualities and extend performance capabilities.

<u>Ejection Sequence Time</u>—The elapsed times from system initiation to seat or capsule/airplane clearance for the four escape concepts with two, three-, and four-man crews are presented below.

CREW	Length of Time from	Initiation to Clearance (SEC)
SIZE	OES EES	CPC
	1.06	0.2
	1.56 2.65	0.2
	낚시하다 시시 성급 문화 대기가	
<b>4</b> (2) (1) (1)	2.06 3.15	0.2

The period from initiation to clearance is considerably greater for open and encapsulated ejection seat systems than for cockpit pod or separable nose capsule systems. This is because they require sequenced ejection to prevent injury to the remaining crewmembers, collision between seats, and possible parachute entanglement.

Such extended time periods between initiation and clearance of the airplane not only affect system effectiveness, but also affect crewmember confidence in the system. This can lead to degradation of crewmember morale, which, in turn, will adversely affect the efficiency and effectiveness of their performance.

Vable XXV presents the relative crew comfort and elitatency in an estimated rank-order rating for the two-, three-, and four-man vehicle.

Toble XXV. Craw Confert and Phickery

provident de la constant de la const	Enoape Concept	RadeOrder
2-man Subsenie VIOL	OLS ETS OPC SNC	0.75 0.81 1.00 0.55
3-man Combined Capability	OES FES CPC SNC	0.01 0.79 0.95 1.00
4-men Supersonic Dash	OLS EEG CP C SNC	0.35 0,75 1.00 1.00

The actual numerical scale for the rank-order was developed on the basis of 1.60 for the best and a fraction thurself for lower ratings.

# 7. CREW SAFETY (OTHER THAN ESCAPE)

The effect an escape system has on overall flight safety, other than the actual escape function, is a factor that should be considered in the evaluation and selection of an escape concept for advanced vehicles. Open and encapsulated ejection seat conce, is require jettisonable hatches or canopies. Past experience shows that escape hatches or canopies are subject to inadvertent loss in flight, with the resulting rapid or explosive decompression. Thus a degradation of crew safety exists for these concepts as opposed to the higher degree of cabin pressure integrity obtainable with the capsule concepts.

When extra crewmembers who are not provided with adequate escape provisions are carried aboard an sizeraft, another degradation in overall crew safety exists. This is apparent for the open and encapsulated seat concepts which provide escape systems only for the normal crew complement. Not only will the extra crewmembers who are not provided with an adequate means of emergency escape generally be lost if inflight escape is required, but their presence in the sireraft has a demoralizing affect on the normal crew, often resulting in delayed and ineffective use of the ejection seats. For the cockpit pod and separable nose concepts, extra crewmembers will be saved with the capsule and crew safety will not be impaired. Also, for the two-man vehicle no degradation was assumed, since this type of vehicle will not be designed to accommodate extra crewmembers.

Another form of flight safety degradation exists when pressure suits must be worn. The use of a restrictive pressure suit results in lewered pilot proficiency rendering the vehicle more vulnerable to accident. This factor is

apparent only in the three- and four-man relative with open ejection seats. The two-man open ejection seat vehicle will not remain the use of pressure suits, since its flight envelope does not exceed 50, 600 lest.

With the open ejection sent concept, environmental clothing will be required during flights over archic regions. This will recall in a flight safety degradation for the same recein as the pressure suit requirement. For the other concepts, environmental clothing will be carried within the seat or capsule.

When open ejection seats or encapsulated ejection seats are used, a further degradation in erew safety exists because of impaired pilot proficiency and vision, and because of the vulnerability of these systems to inadvertent actuation.

The effect of the escape system concept on the crash landing and disching capability of the vehicle is another consideration, other than inslight escape, relevent to crew safety. All of the concepts will provide adequate restraint to protect the crow during crash landing; however, due to the flotation capabilities of the cockpit pad and separable nose capable concepts, these concepts will provide additional survival espability following a disching at sea.

Table XXVI summarizes the factors pertaining to crew flight safety and indicates by a minus sign (-) the escape concepts for which a relative degradation in crew safety exists. The table also shows the estimated rank-order rating for crew safety for each concept and vehicle.



# Table XXVI. Crew Flight Safety

				Sterness and the second second
	CES	BES	CPC	S
Escape Hatch Required	(-) se <sub>X</sub>	Zes (-)	No	0,1
Extra Crewmembers Two-Man  Escape Potential Vehicle  Three- & Four- Man Vehicle	Not Appl No (-)	Not Appl No (-)	Not Appl Yes	Not Appl
Pressure Suit Two-Man Required Vehicle Three- & Four- Man Vehicle	Not Appl Yes (-)	Not Appl No	Not Appl No	
Environmental Clothing Required	Ves (-)	0	No.	C
Ejection Scats or Encapsulated Sents Required	Yes (+)	Yes (-)	No.	200
Disching Flotation Capability	. No (-)	No (-)	Yes	Yes
		Control of the contro	The last of the la	Communication of the second se

i Safety Rating	Three- & Four- Man Vehicles	0, 80 0, 83 1, 00 1, 00
Grew Flight Safety Hank Order Reting	Two-Men Vehicle	0.88 1.00 1.00
	Escape Concept	O B C C C C C C C C C C C C C C C C C C

#### SECTION VII

# ESCAPE CONCEPT TRADE DATA SUMMARY AND EVALUATION

The preceding sections of this report contain data pertaining to craw escape performance requirements, design exiteria, escape concept performance evaluation, automatic detection and initiation evaluations, test requirements, survival capability, cost, weight, volume, escape concept availability, erew comfort and efficiency, and crew safety. These data were developed for use as a basis or guide in the selection, design, and evaluation of escape concepts for advanced VTOL and low-altitude dash vehicles.

Tables XXVII, XXVIII and XXIX summarize the rank-order ratings of the escape concepts for each trade factor for the representative two-man subsonic VTOL vehicle, the three-man combined capability vehicle, and the four-man supersonic low-altitude dash vehicle. The rank-order ratings are on the basis of the best concept with respect to each trade factor being given a rating 1.0; the remaining concepts are then rated as a percentage degradation from the best or most suitable concept.

These data may be used as a guide in the selection of the most suitable escape concept for specific advanced vehicles. However, the relative importance of the various trade factors must be taken into account.

The relative importance of the various trade factors is to a great extent dependent upon the specific aircrast configuration, operations and mission requirements relating to type and length of missions, and the proportion of flight time that the vehicle will be expected to be exposed to various hazardous flight regimes, monetary procurement policies relating to the vehicle at the time of procurement, and procurement lead time available. Also, the significance of escape system weight and volume requirements, that primarily manifest themselves in terms of vehicle cost and gross weight growth and/or vehicle performance degradation, is dependent on procurement policies and the particular vehicle requirement at the time of procurement. However, even though cost, weight and development time may be high, an escape concept should be provided that will assure an escape capability throughout the vehicle performance envelope.

Although an actual selection of the most suitable escape concept for the general types of vehicles studied is not practical without applying the relative importance or weighting factors to each of the trade factors considered, certain valid observations pertaining to the results of this study are possible.

For all three of the representative vehicles studied, the cockpit pod and separable nose capsule concepts provide superior inflight escape capability in all the flight regimes considered, superior survival after-landing capability, superior crew comfort and efficiency, and superior crew safety.

The open ejection seat concept provides a decided advantage over the other concepts with respect to cost, weight, volumetric panalty, and availability.

The encapsulated ejection scat displays the least escape potential relative to the other concepts for VTOL transition, conventional takeoff and landing, and low-altitude dash flight regimes. Rowever, the encapsulated seat shows

Table XXVII. Escape Concept Trade Data Summery for Two-Man Subsonic YTOL Yehicle

Rank-Order Esting		Rank-Order Rating	Su		
Trade Factor	Open Ejection Seat	Encapsulated Ejection Seat	Cockpit Pod Capsule	Separable Nose Capsulo	Best Conlept
Escape and survival potential					
VTOL transition	% 0	0.73	150	•	i.
Conventional takeoff and landing	88.0	99:0	0	0.30	9
Low altitude dash					
Highalthude	<b>6.</b> 95	0.98			P F F
peed using					
Survival after landing	0.16	0.33	0		000 mm 0000000000000000000000000000000
Reliability	0.00	0.93	0	•	5 CA
Total cost	1.0	0.21	67.0	0.13	
Wolght penalty	0	0.32	in cv c>	e c	6
Volumetric penalty	0	300	0000	67.0	Ö
Availability	0	10.0	e c	0.43	ľ
Orew comfort and efficiency	0.75	င် င	0	99	
Orew safety (other than escape)	0.88	0.92	0.1	C'L	Control of the Contro

Tella XXVIII. Escapa Concept Trado Dato Summery for Three-Man. Combined Capability Vehicle

		Rank-Order Rating	ang.		
	Otean	Encapsulated	Cockpit	Separable	Print Print Court
Trade Factor	Ejection Seat	Ejection Seal	Pod	Nose	Best Concept
listape and survival potential					
VTOL transition	2	93. •	8	•	
Conventional takeoff and landing	29.0	0.3	6		0
Low althride dash	90.0	**	•	\$8.0	Ö
epinicu Wall	0.80	.83	•	•	0
Wigh speed			•		
Survival after landing	0.16	6000	o.		
A. III.	0000	86.0			19.60 24.00
Total cost	1.0	0.25	0	0.43	Ö
Wolght panalty	0.1	0.32	<b>8</b>	5	
Volumetric penalty	0	% •	i.	000	
Availability	•		S O	G.	Š
Crew comfort and efficiency	19.0	6.	8		
Crew safety (other than escape)	0.80	0.83	gradient of the second		

Table XXIX. Escape Concept Trade Data Summary for Four-Man Supersonic Adsh Vehicle

					Canadian con consistent process consistent from process con an extension of
		Rank-Order Bating	İnc		
Trade Factor	Open Ejection Seat	Encapsulated Ejection Seat	Coekpit Pod Capsule	Separable Nose Capsule	Best Concept
Escape and survival potential					
VTOL transition					
Conventional takeoff and larding	0.62	98.0		06. •	B
Low althude dash	0.04	87. o	0	0.66	Š
High altitude	08.0	68.0	0.7		S S S S S S S S S S S S S S S S S S S
High speed	27.0	o H	o :	0	P C C C C C C C C C C C C C C C C C C C
Survival after landing	92 .0		o ri		5.00
Reliability	0.99	0.98	0.	•	020
Total cost	1.0	0.31	0.14	0. 13	
Weight penalty	0	0,33	0.23		
Volumetric nenalty	o i	0.38	0.70	0.62	Ö
Availability	0.1	19.0	67.0	0.42	control on reaction
Crew comfort and officiency		0.75	o Fi		8
Crew safety (other than escape)	0.80	0.88	1.0		

slightly better survival after-landing capability and provides botter high-speed and high-altitude capability for the three- and four-man vehicles than the open ejection seat concept. Crow comfort and efficiency factors for the uncapsulated seat are also better than the open seat concept. The encapsulated seat provides a cost, weight, and availability advantage over the capsule concepts, but is inferior to the open ejection seat for these factors.

A more detailed comparison of the inflight escape potentials of the capsule concepts with the open ejection seat concept reveals that for the four-man low-altitude dash vehicle and the three-man combined capability vehicle the capsule concepts have a decided advantage. However, for the two-man subsonic VTOL vehicle, the inflight escape potentials of the concepts are more nearly equal. The open ejection seat showing essentially equal to the capsule concepts for VTOL transition flight, and only slightly lower in other flight regimes. This better showing for the ejection seat concept when used with the VTOL vehicle is partly due to the speed and altitude envelope of the vehicle being more compatible with the open ejection seat capability, and partly due to the fewer number of seats requiring less sequencing time for ejection.

Table XXX summarizes the results of the investigation to evaluate the need for, or benefits of, automatic emergency detection and escape initiation from Sections V 1c, 2c, and 3c. The values in the table indicate the derived probabilities of escape initiation in time for successful escape for manual and for semiautomatic initiation.

It should be recognized that the data for the VTOL hover and transition flight regime are for the two-man subsonic VTOL vehicle, while the data for the conventional takeoff and landing and low-altitude dash flight regimes are for the four-man supersonic dash vehicle. The data, therefore, are not directly comparable. Also, the data for the VTOL hover and transition flight regime are based on engine failure emergency flight conditions, while the data for the other flight regimes are based on the range of possible nose-over g and speed emergency flight conditions.

As shown in the table, successful escape will be initiated in less than one-half of the VTOL engine failure situations analyzed if manual detection and initiation are relied upon. With semiautomatic detection and initiation, where the emergency situation is automatically sensed, escape decision logic is computerized, and the pilot is conditioned to respond to the escape signal with full confidence. The analysis indicates that near 100 percent successful escape could be anticipated for the VTOL engine failure situations.

For the conventional takeoff and landing, and the low-altitude dash emergency conditions analyzed, manual initiation will not result in an acceptable expected survival rate. The low-altitude dash flight regime presents an especially critical area for manual escape initiation when open ejection seats are used. The presentation of this data should, however, be qualified, since, for the analysis, successful escape was considered to include recovery of the entire crew. Therefore, for the open ejection seats, escape was not considered successful unless the last of the four crew members (ejected in sequence) could be successfully recovered, even though part of the crew may have been saved.

VTOL Hover and T Two-Man Sub	ransition Flight R sonic VIOL Vehic				
Escape Concept		ity of Eucceesful pa Initiation			
	Ministra	Semiamonatio			
Open Ejection Seats	0.484	i.000			
Cockpit Pod Capsule	0.445	0.975			
Conventional Takeoff and Landing Flight Regime Four-Man Supersoi ic Dash Vehicle					
Escape Concept		ity of Successful ipe Initiation			
	Manual Semiautomatic				
Open Ejection Seats	0.197 0.720				
Cockpit Pod Capsule	0.288	1.000			
	ash Flight Regime rsonic Dash Vehic				
Escape Concept		ity of Successful pe Initiation			
	Manual	Semiautomatic			
Open Ejection Seats	0.013	0.072			
Cockpit Pod Capsule	0.216	1.000			

The results of this analysis indicate the need for some form of automatic or semiautomatic emergency detection and escape initiation for all the critical flight areas studied. Special consideration should be given to the use of fully automatic detection and initiation systems for it is multiplace (4 crewmembers) vehicles employing the open or encurulated ejection seat concepts.

# MEFERENORS

- 1. Tufts. Handbook of Aviana Englacering
- 2. AFROM 80-3, "Section C"

(

- 3. Morgan of al. Human Englocaring Suide to Englished Decim
- 4. Deputy Depostor General for Safety, U. S. Air Force, Novem Air Force Base, California, High Speed and Thunderstorm Effects on USAF Elections, April 1861, pp 20-61
- 5. Maj. W. R. Detrick, U. S. Air Force, Deputy Inspector General Life Sciences Division, Norton Air Force Base, California, Sarvival Following Air Force Aircraft Accidents, 1 January 1958 - 31 December 1963
- 6. R. H. Shannon and S. P. Chunn, Directorate of Aerospace Safety, Norton Air Force Base, California, <u>USAF Ejection Experience</u>, 1 January 1961 31 December 1963

	(Security classification of title, body of states and indext	nentille un en e pri. Le constation desail by co	<b>M</b> italian phan t	the overall agost to liberations)	i viji		
250000	I CRIGHLATING ACTIVITY (Consume author)	uramina governopora provincialistica un militaria e establir e	le repoi	TT SECURITY CLASSIFICATION	(# <b>19</b> 19)		
and the second	The Boeing Company		derrichments un anneuer aus	an man an ang mananan na ang mananan inanang mananan manang mananan an and mananan an an an an an an an an an Bananan an	er mest		
diam'r.	Renton, Weshington		26 GROUP				
	3. REPORT TITLE		tions maked the Sold and	and the second of the second o	- 4		
1	Investigation of Grew Escape Concepts	for VIOL and L	ov-Alti	tuda Dash Vehicles			
- duce							
200	4 DESCRIPTIVE NOTES (Type of regard and inclusive detec)	Tradition to the second of the	EMAIL EA ROOM NEWS (* 51).	Largest try in national feet front productions around the residence of the production of the security of the s	A Serge cons		
- COLUMN	Final Technical Report, Feb 65 to Jul	66	dalam-remany.com/why.com	Participation of the Control of the			
and the same of th	5 AUTHOR(S) (Lest name, that name, initial)  Pull Table O. Covacied Research I						
	Bull, John O.; Serocki, Edward L.						
2000	Schor, Jakob, et al						
ACT DO	6 REFORT DATE July 1966	78. TOTAL NO. OF F	AGES	75. NO. OF BEYS	S) Services		
	SM. CONTRACT OR GRANT NO.	94 ORIGINATUR'S RE		erie der reich keine werden der bei der reichte bei der gewert der schausse der sch			
	AF33(615)-2378	SA UNIGINATOR'S K	MUNTHON	TO LANGE TO A CONTROL OF THE CONTROL			
	& PROJECT NO.	D6-60001-2					
200		Commence of the state of the st	·				
	cTask No. 136203	Sb. OTHER REPORT	HO(5) (Any.	other runders that may be seeigned			
		AFFDL-TR-66	- 149				
	Qualified requesters may obtain copies of this report from DDC. Release to CFSTI						
Calvatanas	is not authorized; subject to special export controls; each transmittal to foreign government or national must have prior approval of AFFDL.						
and the same	11. SUPPLEMENTARY NOTES 12. SPONSONING MILITARY ACTIVITY						
Air Force Flight Dynamics Laboratory							
a come		RTD, AFSC	raari AVI	0 0 4 A V 4			
	13 ABSTRACT	MITEHE-LAIRE	JEON AFI	8, Ohio 45433			
	This report covers the results of a st						
	criteria for selection, evaluation, an						
	low-altitude dash vehicles. Escape co restraint, crew comfort and efficiency						
	requirements are defined. Representat						
	tion seat, cockpit pod, and separable	nose capsule e	scape co	oncepts and vehicle			
	configurations are defined. Escape co				1		
	to altitude, speed, and descent angle escape concept effectiveness for VTOL						
	and landing, low-altitude dash, and hi						
,	are presented. Also, the results of a	n investigatio	n of aut	tomatic emergency			
	detection and escape initiation are pr				<i>i</i> e		
	to escape and survival potential, reli availability, crew comfort and efficie				.		
2000	presented in a form useful as a guide				* Define		
	escape concepts for advanced VTOL and						
andergreen.							

UNCLASSIFIED
Security Classification

DD 15084 1473

Low Altitude Escape

VIOL Crew Escape

Dash Vehicle Crew Escape

Crew Escape Concepts

#### INSTRUCTIONS

- 1. ORIGINATING ACT 177: Enter the name and address of the contractor, subcontractor, grantes, Department of Defence activity or other organization (corporate author) issuing the report.
- 2c. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 25. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
- 3. REPORT TITLE: Exter the complete report title in all capital letters. Titles in all capes should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
- 4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
- 5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter lest name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
- REPORT DATE: Enter the date of the report as day, mouth, year, or mouth, year. If more than one date appears on the report, use date of publication.
- 7s. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 76. NUMBER OF REFERENCES Enter the total number of references cited in the report.
- 8a. CONTRACT OR GRANT NUMBER: It appropriate, enter the applicable number of the contract or grant under which the report was written.
- 85, &c. & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9s. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
- 10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security clessification, using standard statements such 62:

- (1) 'Qualified requesters may obtain copies of this report from DDC''
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through

A

à

(5) "All distribution of this report is controlled. Qualified DDC users shall request through

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

- 11. SUPPLIMENTARY NOTES: Use for additional explanatory notes.
- 12. SPCNSO: ING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (Paying for) the research and development. Include address.
- 13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS). (3), (C). or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for estaloging the repert. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical content. The assignment of links, rules, and weights is optional.

em. 1.1961

UNCLASSIFIED

Security Classification